




NOTE

- 1.Material
Plunger: Brass 3604
Barrel: Brass 3604
Spring: SUS304
Housing:PA46
- 2.Plating
Plunger: 5 micro-inch minimum Au over 50~100 micro-inch nickel
Barrel: 5 micro-inch minimum Au over 50~100 micro-inch nickel
- 3.Electrical
Rated current & voltage: DC 12V; 1.0A Max.
Contact resistance: 50 mohm maximum at normal working height(quiescence)
- 4.Mechanical
Spring force: 100g±20% at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operate it based on the working height
Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.

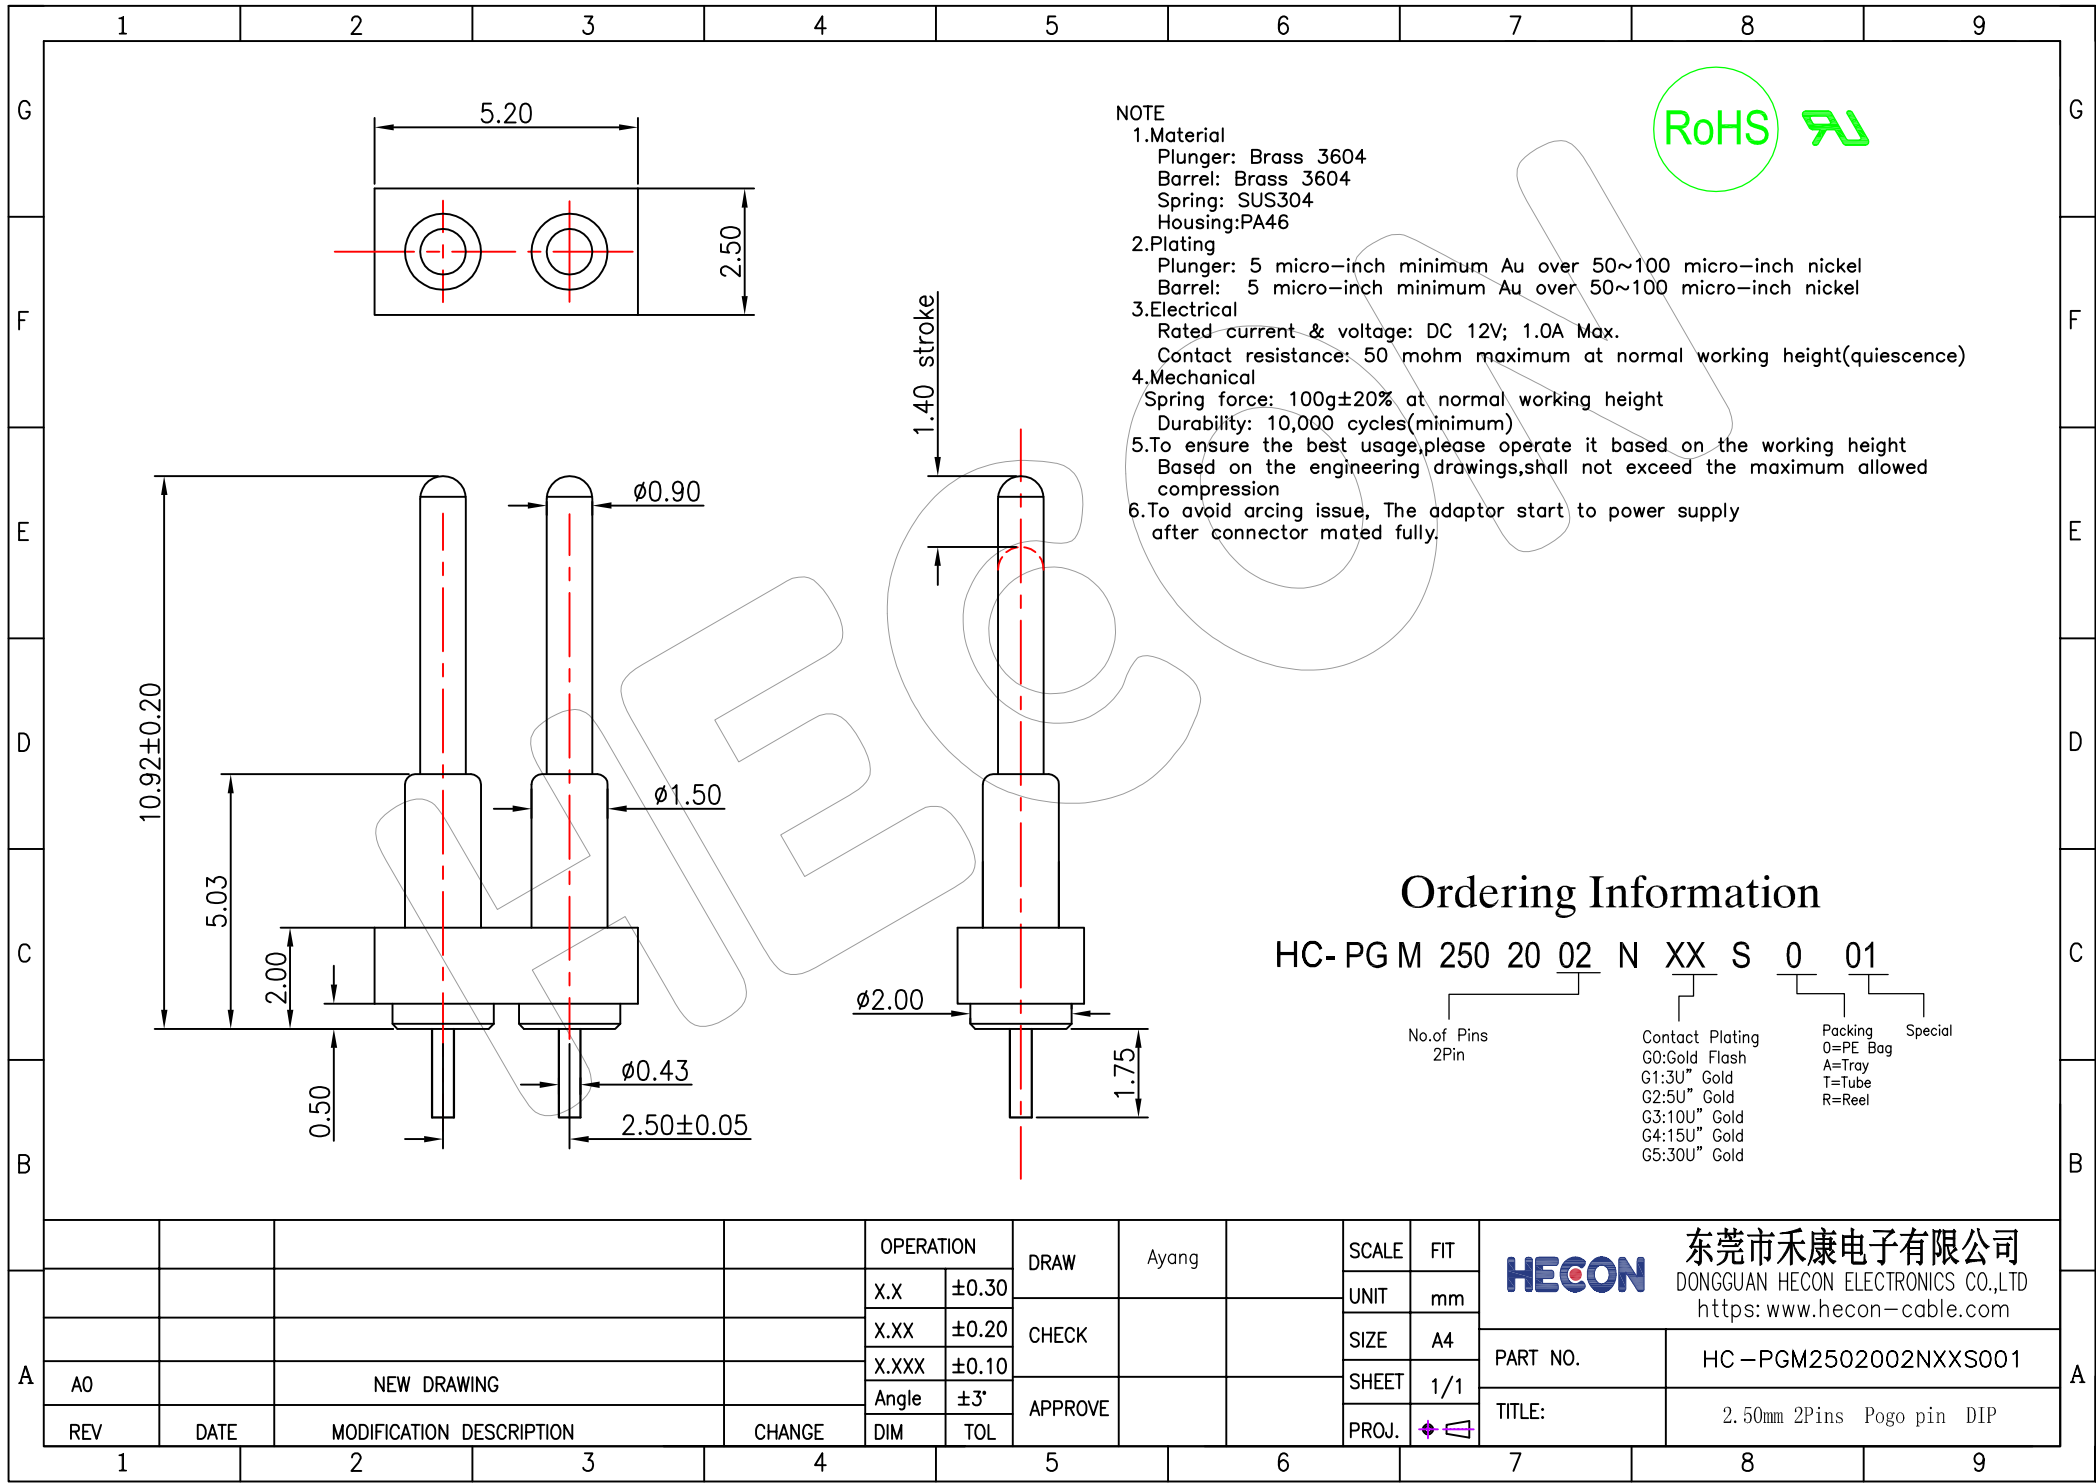

Ordering Information

HC- PG M 250 20 02 N XX S 0 01

No.of Pins
2Pin

Contact Plating
G0:Gold Flash
G1:30U" Gold
G2:50U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold

Packing
0=PE Bag
A=Tray
T=Tube
R=Reel

Special

A					OPERATION		DRAW	Ayang		SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD https: www.hecon-cable.com		A			
					X.X	±0.30									UNIT	mm	
					X.XX	±0.20	CHECK				SIZE	A4					
	A0		NEW DRAWING		X.XXX	±0.10					SHEET	1/1					
					Angle	±3°	APPROVE										
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					PROJ.		TITLE:		2.50mm 2Pins Pogo pin DIP		
1		2		3		4		5		6		7		8		9	