

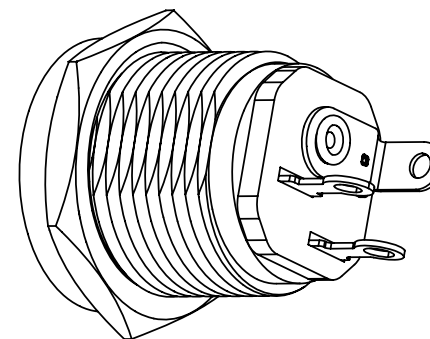

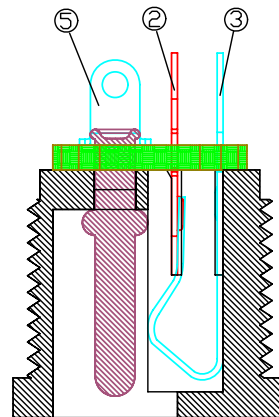
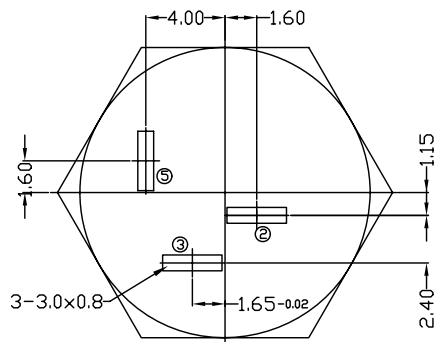



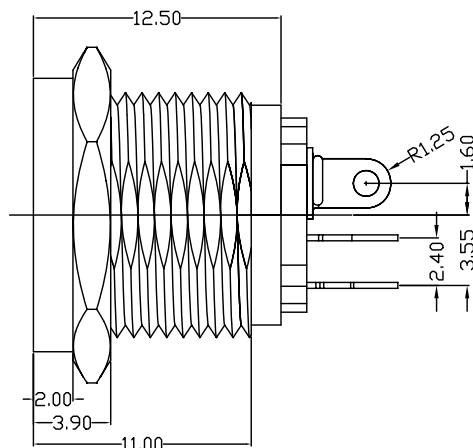

Three-dimensional rotation

PIN	ø2.0	ø2.5
ADDP		

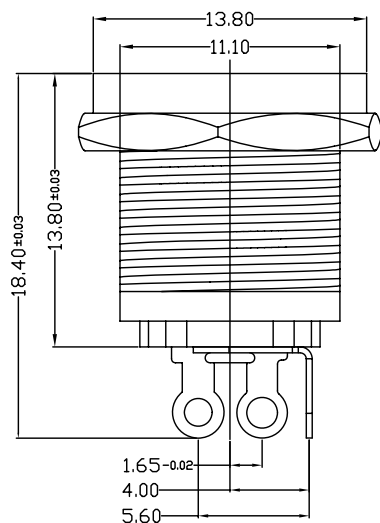

KEY SPECIFICATION:

1. RATING :DC 12V 1A
2. CONTACT RESISTANCE:100mΩ MAX
3. INSULATION RESISTANCE:100MΩ MIN
4. DIELECTRIC STRENGTH:500VAC FOR 1Min
5. OPERATING FORCE:0.3-3KG
6. OPERATING LIFE:5,000CYCLES
7. OPERATING TEMPERATURE:-25℃~+85℃

8					TOLERANCE UNLESS SPECIFIED				
7	NUT	BRASS	1	Ni PLATED	WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°				
6	COVER	PF	1	NATURAL					
5	CONTACT FOOT	BRASS	1	Sn PLACK		ISSUE	DATE	DESCRIPTIONS	APPD.
4	PIN	BRASS	1	Ni PLACK	TITLE: DC POWER JACK	UNIT:mm		DRWG. NO.:	
3	SPRING	BRONZE	1	Ag PLACK	MODEL NO: DC-022	SCALE: 4:1		DWN	
2	FLAT PIECE	H62 BRASS	1	Sn PLACK		CHK'D			
1	HOUSING	PBT	1	BLACK		APPD.			
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					



DONGGUAN JINBAOLI ELECTRONICS CO.,LTD
XIAMEN JINBEILI ELECTRONICS CO.,LTD