


VIEWING DIRECTION

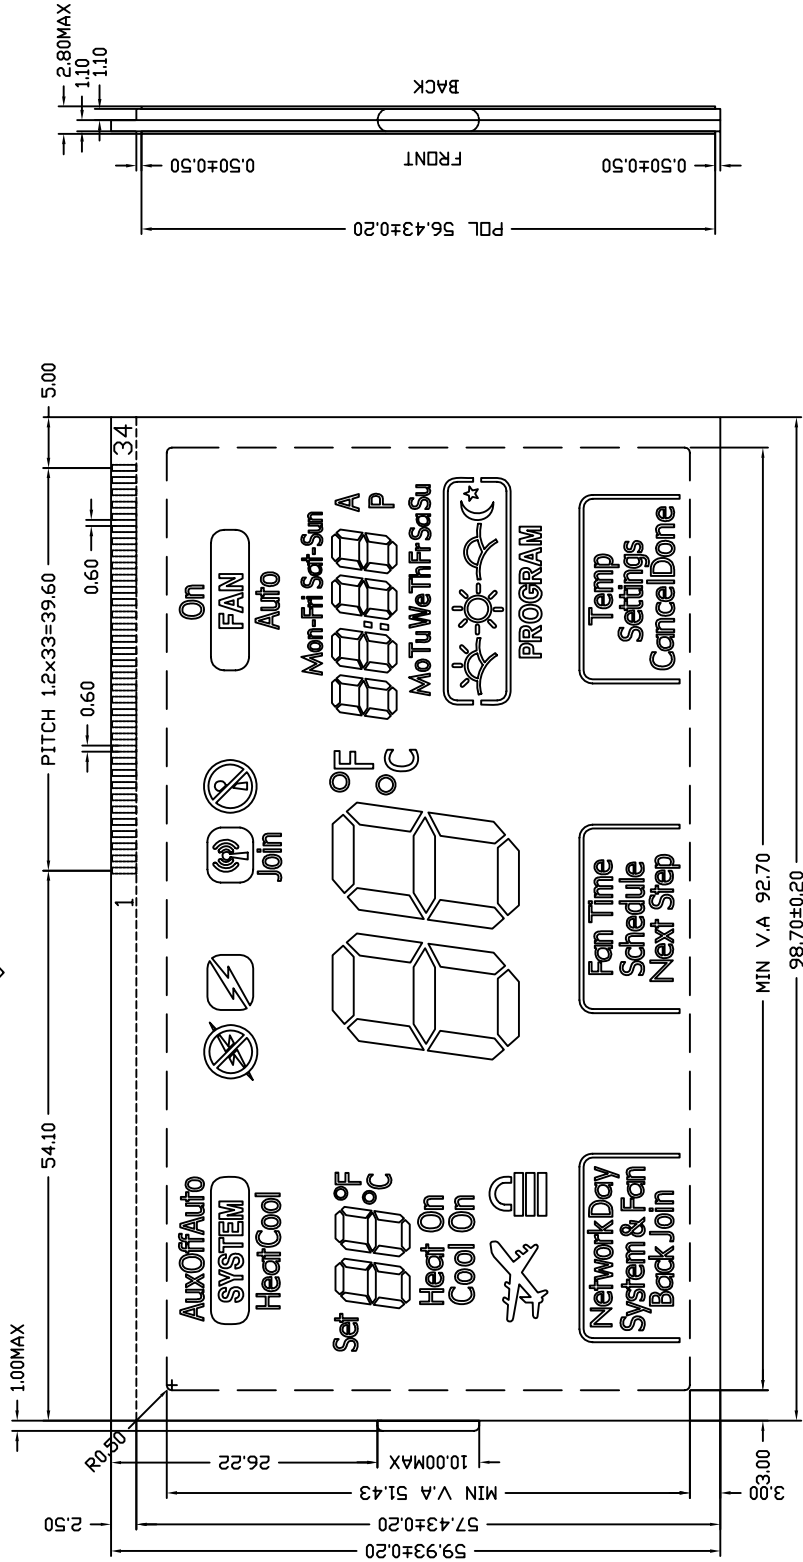

0.50±0.50 0.50±0.50 0.50±0.50

1. ALL OUTLINE DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 12:00 O'CLOCK.
3. VIEWING MODE: POSITIVE, TRANSPARENT
4. DISPLAY TYPE : TN
5. CONNECTION: ZEBRA
6. FLUID SPECIFICATION:
 - DRIVING VOLTAGE: 3.3V
 - MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS
 - OPERATING TEMP: 0°C -- +50°C
 - STORAGE TEMP: -10°C -- +60°C
7. ROHS REQUEST

请仔细确认图案!

确认此型号所有图纸; 签字确认:		序号	内容	日期	SPLIND SCREEN TECHNOLOGY (H.K.) LIMITED	
		△			单位:	mm
		△	修		客户编号:	版号: 02
		△	改		绘图:	日期: 2011.09.17
		△	修改	2011.09.17	审核:	批准: TAN
		Modify the drawing and polarizer;				页数: 1/3