

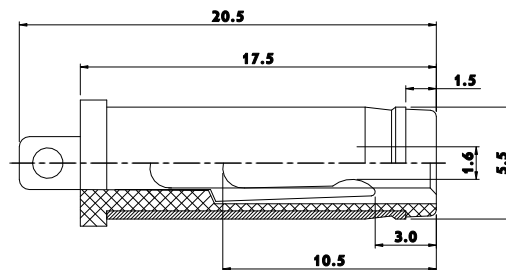
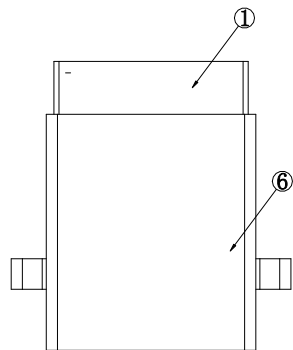



F
E
D
C
B
A



12345678

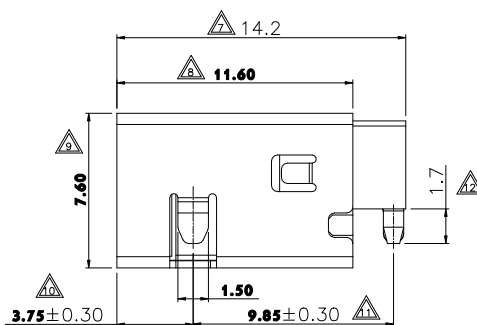

MATING PLUG $\phi 5.50$

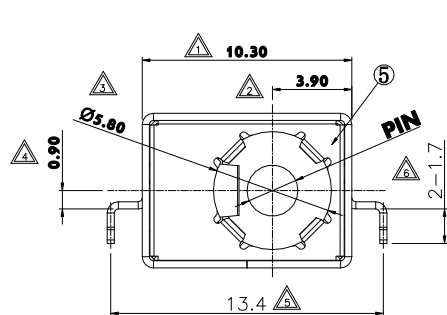

RECOMMEND P. C. B LAYOUT
TOP VIEW (TOLERANCES:0.05)

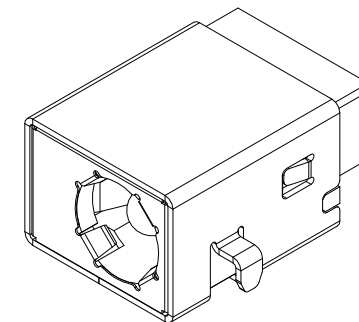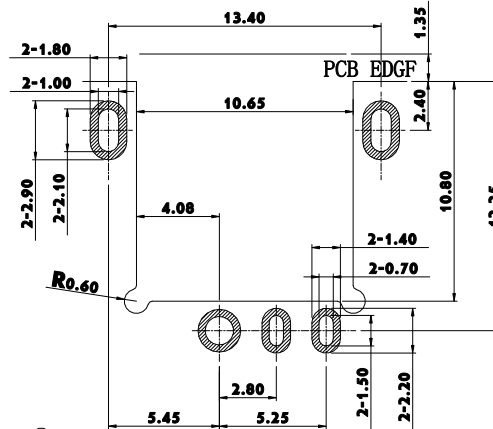

Level-1 Controlled Substances are banned

PIN	$\phi 2.0$	$\phi 2.5$
APPD.		✓

SCHEMATIC	
	4 CENTER PIN (+)
	3 CONTACT FOOT
	2 TIP SPRING (-)

SPECIFICATION
1.Rating : DC 20V 5.5A;
2.Contact resistance: $\leq 0.03\Omega$;
3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.
7.Marked $\triangle$ are important dimensions.

7	STOPPER	1	LCP	BLACK	UL 94V-0
6	SHELL	1	BRASS	—	Ni-Plating
5	GROUND	1	SUS301	—	N/A
4	PIN	1	ZINC	—	Au-Plating
3	CONTACT FOOT	1	BRASS	—	Ag-Plating
2	SPRING PIECE	1	BRONZE	—	Ag-Plating
1	HOUSING	1	LCP	BLACK	UL 94V-0
NO. DESCRIPTION		QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle			
X ± 0.50		X $\circ \pm 3^\circ$	CUSTOMER COPY	TITLE:	DC-JACK
XX ± 0.30		XX $\circ \pm 2^\circ$			
XXX ± 0.20		XXX $\circ \pm 1^\circ$	PART NO.		DJ-D303
XXXX ± 0.10					
PROJ:		SCALE: 4:1	UNIT:mm	SIZE: A4	SHEET: 1 OF 1

						DESIGN	Steven	16'/05/26	
						CHECK	Jason	16'/05/26	
						APPRO	Max.hu	16'/05/26	
ECN(DCN) NOREV	DATE	NEW DESCRIPTION			CHANGE	APPRO	Max.hu	16'/05/26	

Original: Design: Steven Check: Jason Appro: Max Date: 16'/05/24