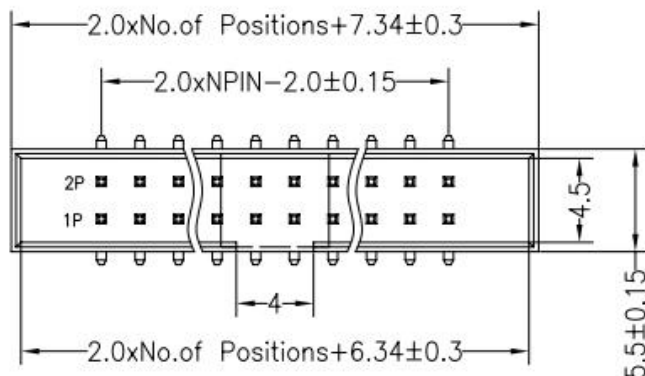
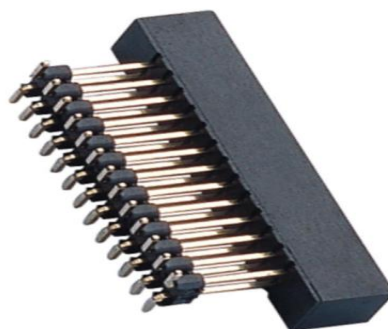
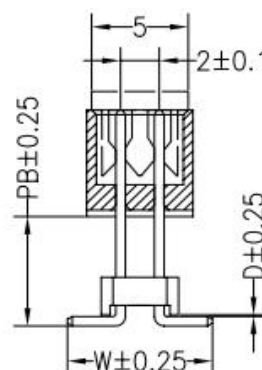
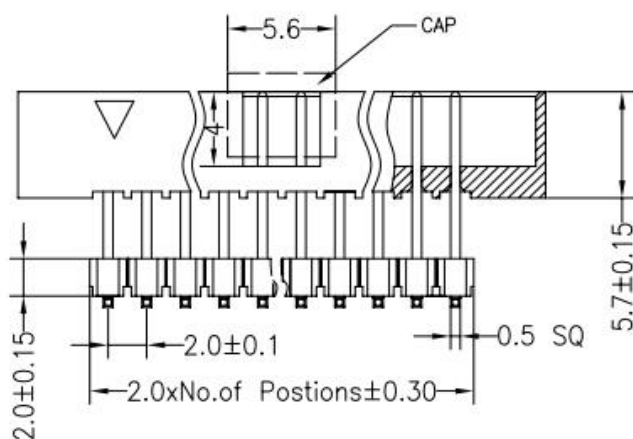
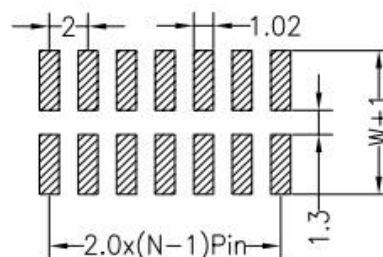


SPECIFICATIONS:

Rated Current	1.5AMP
Contact Resistance	20mΩ Max
Withstand Voltage	400V AC/DC
Insulation Resistance	800mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au over Ni
Insulator Material	PA6T
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Dimension antitheses list			
ITEM	PB	D	W
Standard	2.50	0	6.50
Alternate			

Ordering Information

HC Series	No. of Pin Per Row	Type	Plating	Insulator Option	Inner Code	Packing	End code
HC-BH520D 2.0x5.7mm Box Header	06P	M=SMT	G0=Gold Flash	A=PBT	BD00	0=PE Bag	X
	64P		SN=Tin Plated	B=PA66		A=Tray	01
			SM=Matted Tin	C=PA6T		T=Tube	02
			S0=Gold/Tin	D=PA46		P=Tube+Cap	
			G1=3u Gold	E=PA9T		R=Reel+Cap	
			G2=5u Gold	F=LCP		M=Reel+Mylar	
			G3=10u Gold	X=Special		X=Special	
			G4=15u Gold				
			G5=30u Gold				
			S1=3u Gold/Tin				