

惠州宏利源电器有限公司

HONYONE ELECTRICAL APPLIANCE CO.,LTD

S-03F

Rating: 10 A 250VAC(UL CUL)

6.3A 250VAC(VDE)

10 A 250VAC(CCC)






Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 2000V1minute

Fuse:Ø5.0x20mm 

Welding method:Manual Soldering

(350 ° C±5 ° C,3s±0.5s)

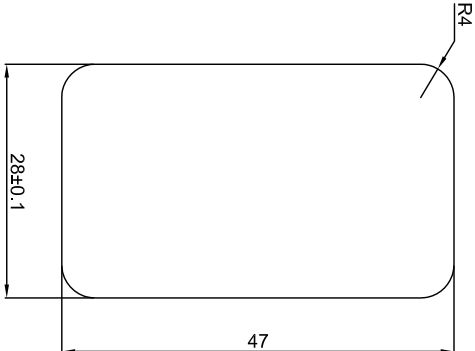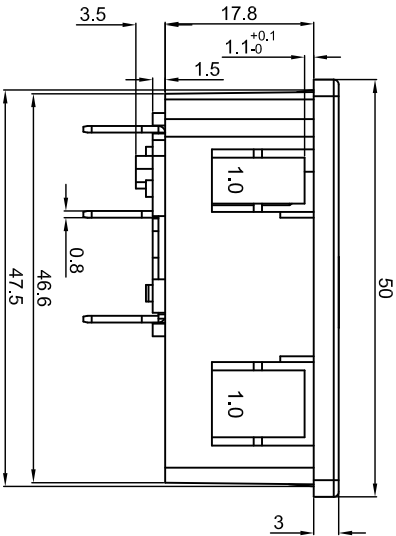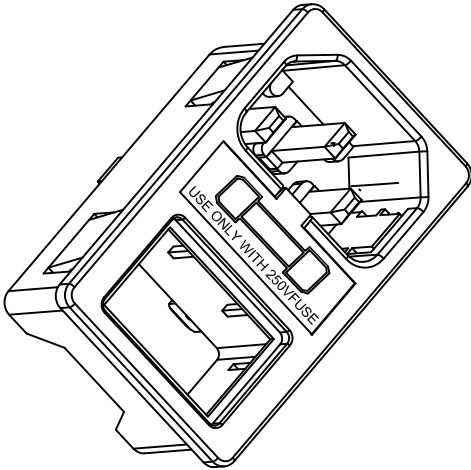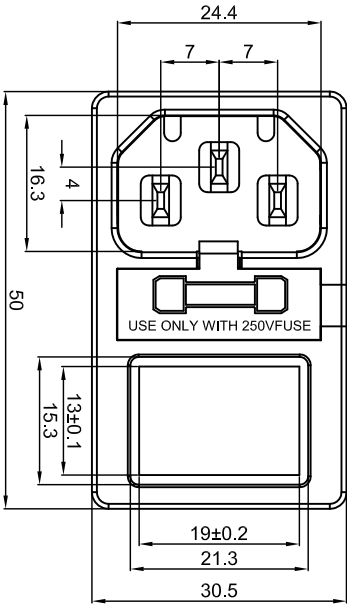

			公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE		± 1°		单位 DIMENSION UNIT		mm.			
			视角 VIEWING ANGLE				比例尺 SCALE		NONE		日期 DATE		2016.12.11		品名 TITLE		图号 DRAWING NO	
A1	重新整理	2012.12.11	N/A												S-03F-12S-1.0		DRAWING NO	
A0	New Issue	2011.12.01	N/A		Richard		核 对 CHECKED BY		Sinc		绘图 DRAWN BY		P.W.Rao				S-03F-12S-1.0_CP_A1	
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE		ECN NO.		APPROVED BY											