



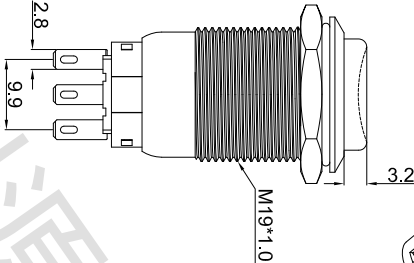


PBM19



Switch Specifications
Rating: 5A 250VAC ;
2A 36VDC ;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:1500VAC For 1 minute ;
Total Travel: 3.0± 0.5mm ;
Operating Force:300± 150gf ;
Mechanical Life:200,000 cycles ;
Load Life:50,000 cycles ;
Operating Temperature:-20° C~70° C ;
Function: LOCK

MATERIAL:

Actuator: SUS 316 ;
Top Base: SUS 316;
Buttom Base:PBT ;
Terminal: Brass,Silver or Gold plated ;
Nut: Brass, Ni plated .

Panel Thinkness: 10mm MAX.

			公差	TOLERANCES	.X± 0.3	.XX± 0.15	角度	ANGLE± 1°	单位	DIMENSION UNIT	mm.
			视角	VIEWING ANGLE		比例尺	SCALE	NONE	日期	DATE	2018.06.26
A0	New Issue	2018.06.26	N/A	核准	Richard	核对	Sinc	绘图	Mashaofei	PBM19-13Z-C-NNN-S16-S	图号
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY		PBM19-13Z-C-NNN-S16-S-CP-A0	DRAWING NO