

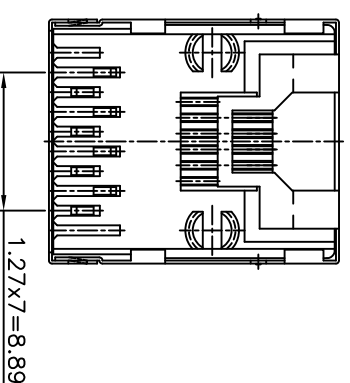
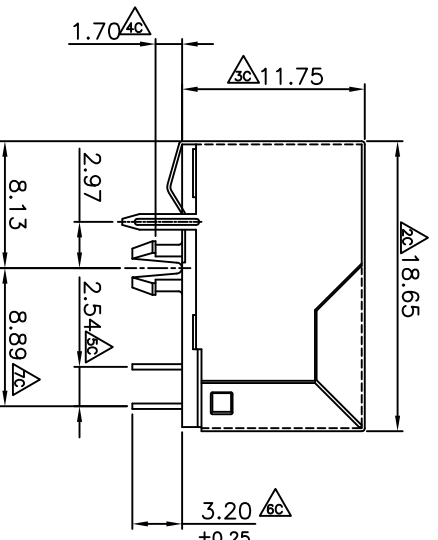


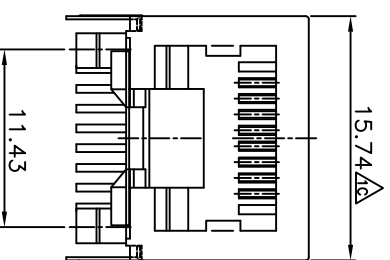

Electrical:
1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.
Mechanical:
1.Operating:750 Cycles Min.
Environmental:
1.Storage:-40°C To +85°C.
2.Operation:-20°C To +75°C.
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

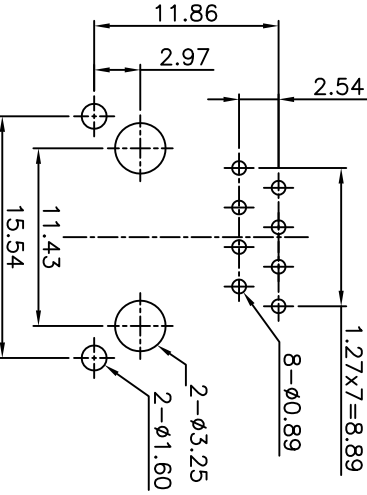

PCB LAYOUT/TOP VIEW

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELD: BRASS PLATING NICKEL ALLOY.

1 2 3 4 5 6

J-GON									
UNIT		SCALE		SHEET		TITLE :			
mm		1/1		1 of 1					
DRAWN BY		APPROVED BY							
Alan		Alan							
110329		110329							
General		tolerance							
xxx ±0.10		DRAW NO :							
xx ±0.05		J014010156							
x ±0.50									
ANG ±.5°									
									