
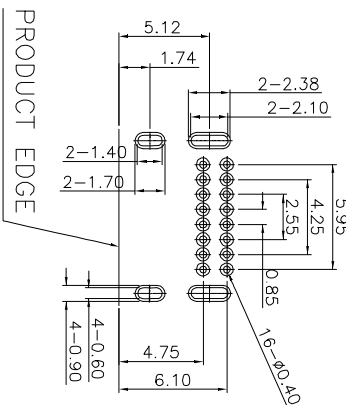






4.2 SHELL: 50u" Min. NICKEL ALL OVER.



PRODUCT EDGE

RECOMMENDED P.C.B LAYOUT

PCB THICKNESS: 1.60±0.05mm

DEFAULT TOLERANCE: ± 0.05

PIN	SIGNAL NAME	MATING SEQUENCE	PIN	SIGNAL NAME	MATING SEQUENCE
A1	GND	FIRST	B12	GND	FIRST
A4	VBUS	FIRST	B9	VBUS	FIRST
A5	CC1	SECOND	B8	SBU2	SECOND
A6	DP1	SECOND	B7	DN2	SECOND
A7	DN1	SECOND	B6	DP2	SECOND
A8	SBU1	SECOND	B5	CC2	SECOND
A9	VBUS	FIRST	B4	VBUS	FIRST
A12	GND	FIRST	B1	GND	FIRST
SHELL		GND	SHELL		GND

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°					
5					ISSUE	DATE	DESCRIPTIONS			APPD.
4					TITLE: USB JACK		UNIT: mm	SCALE: 4:1	DRWG. NO.	
3	SHELL	SUS	1		MODEL NO: USB TYPE C 16P 90°DIP CL1.88 H3.46 CONN		DWN	YINXONG		
2	TERMINAL	BRONZE	1				CHK'D	ZHANGZHILIU1		
1	HOUSING	LCP	1	BLACK	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD					
NO.	DESCRIPTION	MATERIAL	QTY	PLATING						