


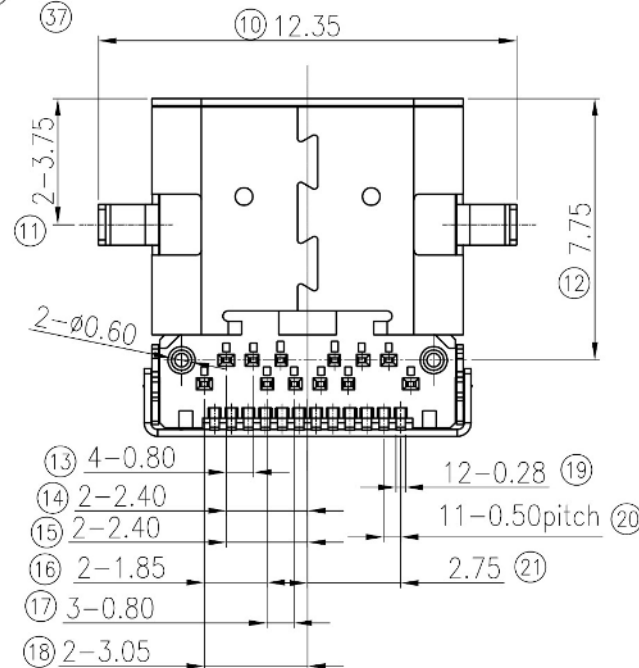
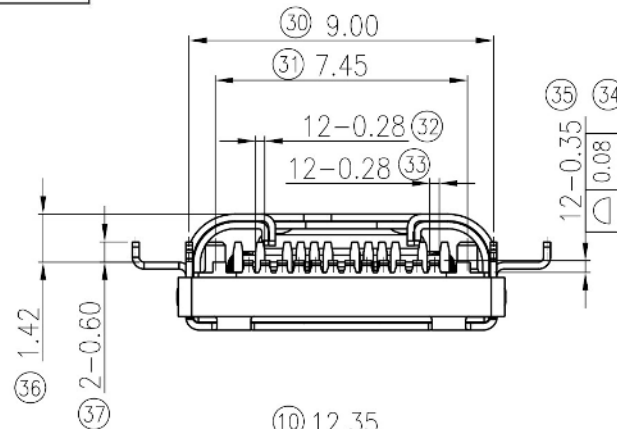
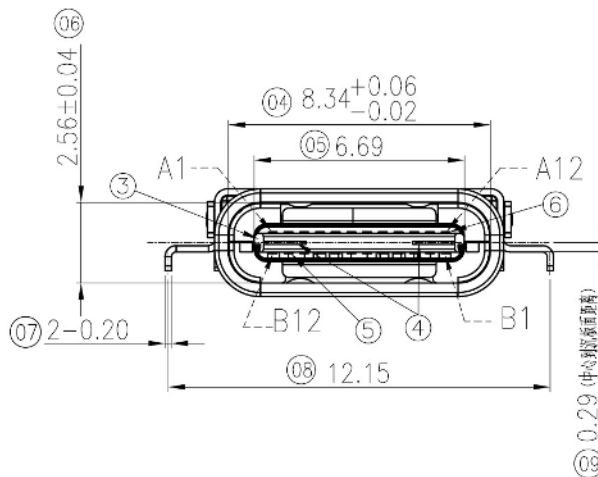


CAD FILE:

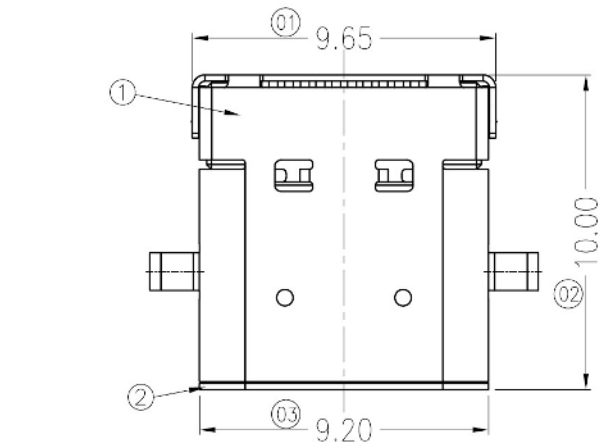

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	RFU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	RFU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

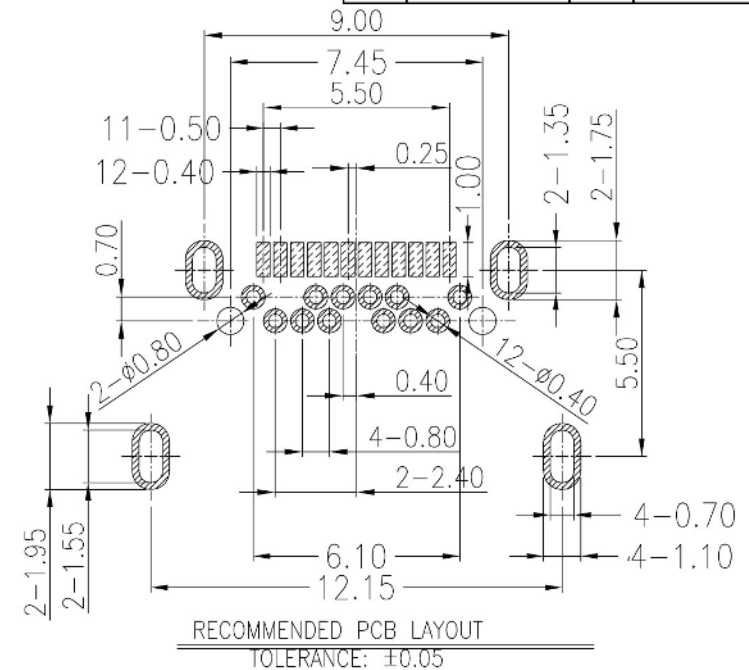

8					TOLERANCE UNLESS SPECIFIED				
7									
6	TOP CONTACT	BRONZE	12	50u" Min Ni UNDER PLATING 50u" Min MATTIE TIN PLATING ON SOLDER AREA	WITHIN:1.5mm±0.1mm OVER :1.5mm±0.2mm				
5	BOITM CONTACT	BRONZE	12	50u" Min Pd/Au FLASH ON CONTACT AREA OR Au FLASH ON CONTACT AREA		ISSUE	DATE	DESCRIPTIONS	APPD.
4	SHIELDING PLATE	STAINLESS STEEL	1		TITLE :USB插座系列	UNIT :MM	DRWG NO.:		
3	HOUSING	LCP	1	BLACK	MODEL: USB-3.1F-C TYPE(破板式)	SCALE:5:1	DWN"		
2	SHELL	STAINLESS STEEL	1	Ni PLATED			CHK'D		
1	TOP SHELL	STAINLESS STEEL	1	Ni PLATED			APPD.		
NO.	PART NAME	MATERIAL	Q'TY	FINISHING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD				