

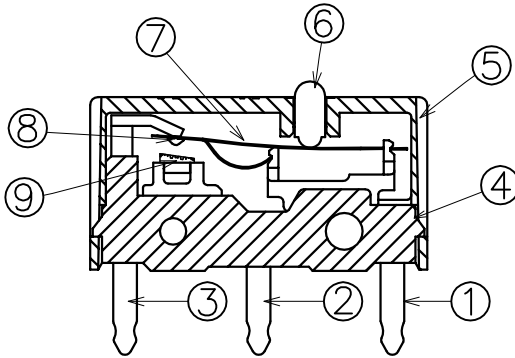
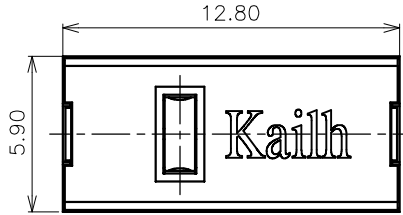
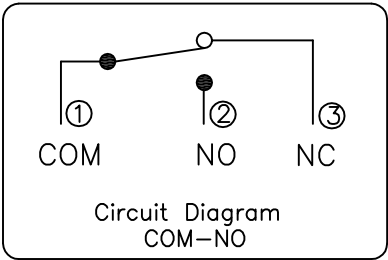
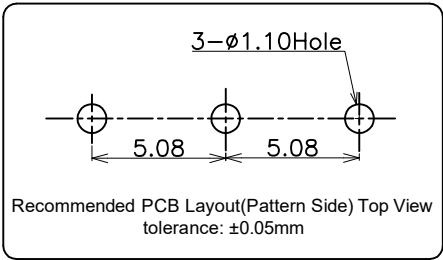


ABIDE BY ROHS

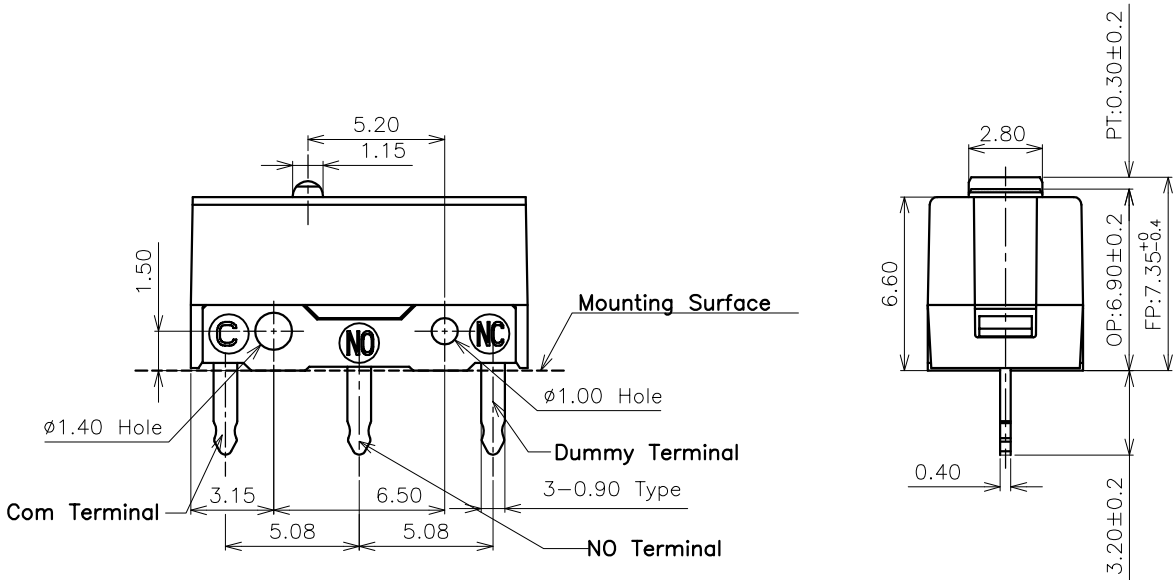

- Specification :
1. Rating :DC30V 0.1A; Circuit: COM-NO
 2. Contact Resistance: 100mΩ Max.
 3. Insulation Resistance: 100MΩ Min. (DC250V)
 4. Withstand Voltage: AC500V(50-60Hz)for 1 minute
 5. Operation Force: 65±10gf
 6. Releasing Force: 25gf Min.
 7. Pretravel: 0.30±0.2 mm
 8. Movement Differential: 0.12mm Max.
 9. Mechanical Life: 80,000,000 Cycles Min.

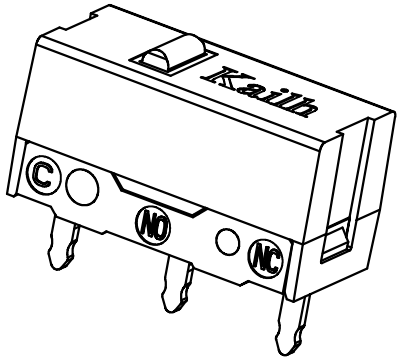

⑨	Contact	—	1	Silver Alloy	Natural	—
⑧	Contact	—	1	Composite Gold	Natural	—
⑦	Shrapnel	—	1	Copper Alloy	Natural	—
⑥	Keystoke	—	1	POM	Black	—
⑤	Cover	—	1	PC	Translucent Black	—
④	Base	—	1	PBT	Black	—
③	Dummy Terminal	3	1	BRASS	Ag-Plated	—
②	No Terminal	2	1	BRASS	Ag-Plated	—
①	Com Terminal	1	1	BRASS	Ag-Plated	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
DRAWN		L.Zhang	2020.06.17			
CHECKED						
APPROVALS						
				TITLE:	80M Micro Switch	
				Customer No.		
				PART NO.	CMI126601D03	
TOLERANCES ARE			30<L	± 0.30	ANGLE	UNIT: mm
			10<L	± 0.20		
			5<L	± 0.15		
			L	± 0.10	$\pm 2^\circ$	DRAWING NO.
						SCALE: 1:1
						PROJ: 
						SHEET 1 OF 1

—	A	2020.06.17	NEW	L.Zhang		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.