
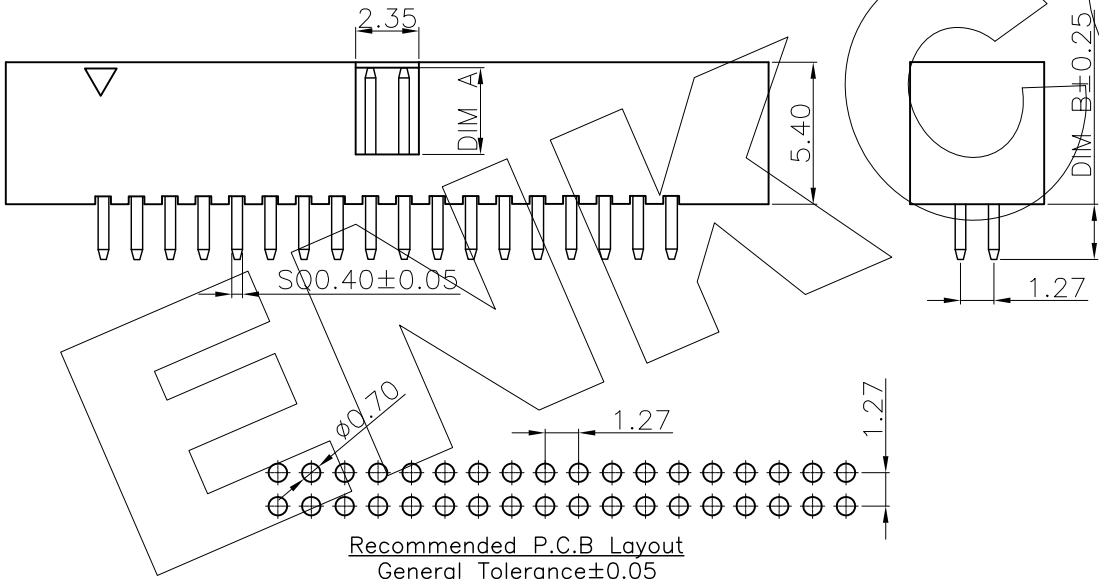


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2020-09-28

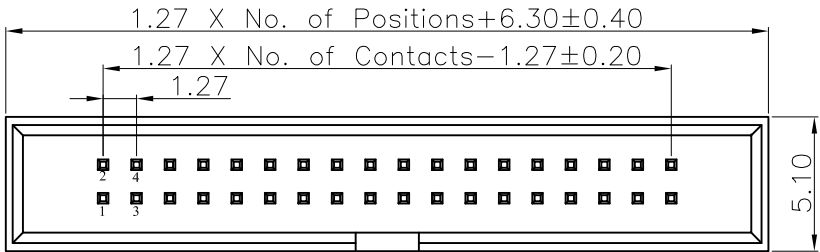

BHF	XXX	12	D	XX	C	X	N	DXXX
HOUSING TYPE F PH1,27 H5,4	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL C PA6T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

Technical Data

Material:
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Black Polyester UL94 V-0
Standard: PA6T+30%G/F.

Electrical:

Rating current: 1.0Amps/contact max.
Rating voltage : 100 V AC/DC
Contact resistance: $\leq 20\text{m}\Omega$ /contact
Insulation resistance: $\geq 1000\text{M}\Omega$
Withstanding Voltage: 500V AC/minute

Mechanical:

Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$
Tin plated: -40°C to $+105^{\circ}\text{C}$
Soldering temperature: $+260^{\circ}\text{C}$ max(PA6T).

DIM A AND DIM B CAN BE CUSTOMIZED BY CUSTOMERS

ENKCOM® www.enkcom.com TEL:+86(0)769 8904 9672 FAX:+86(0)769 8904 9671 E-MAIL:sales@anycom.tw		东莞市恩康电子科技有限公司 DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD	
TOLERANCE	DATE :	2020-09-28	TITLE:
ANGLE $\pm 5^{\circ}$	DRAWN :	Songjun	PH2.54 H8.90 Double Row Straight Box Header
X.XXX ± 0.15	CHECKED :		PART NO: BHFXXX12DXXCXNDXXX
X.XX ± 0.25	APPROVED :		
X.X ± 0.38	PROJECTON		REV: A0
X. ± 0.50			UNIT: mm
			SCALE: 1:1
			SIZE: A4
			PAGE: 1/1