


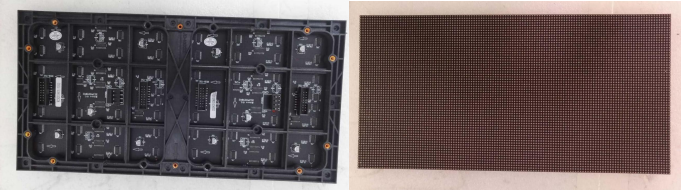


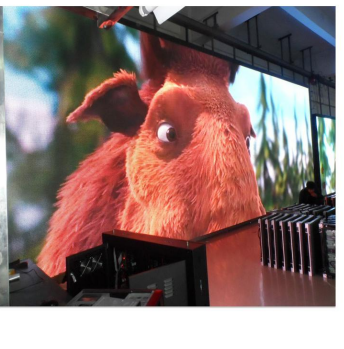
深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co., Limited

Add: No. 2505 Songbai Road, Shiyan Town, Baoan District, Shenzhen, China
 Contact Person: Ms Helen Qin Skype: helenqin32 Mob/WhatsApp/Wechat: +86 17688933149
 Email: sales02@szxgcl.com
 Web: www.xgcl.com

P2.5 Indoor RGB SMD LED display parameter

LED Module		
	pixel pitch	2.5mm
	module size	320*160mm
	module resolution	128*64
	LED	SMD2121
	Scan	1/32Scan
	Application	Indoor
	LED chip	Epistar

LED Cabinet		
	Cabinet Size	640mm (W) 640mm (H)
	Cabinet resolution	256*256dots
	module quantity	2*4pcs
	LED power supply	5V40A 200W
	Material	Iron/ die casting aluminum
	Receiving card	1pcs Novastar

LED Screen				
	Pixel density	160000dots/m ²	Continuous Working Hours	>72 hours
	Ave power consumption	200W/m ²	Using Life	100,000 hours
	Max power consumption	800W/m ²	MTBF	>10,000H
	Optimum Viewing Distance(m)	≥2.5m	Scatter OOC Point	<0.01%
	Brightness(cd/m ²)	≥1200cd	Continuous OOC Point	None
	Refresh Rate	1920 frame/s	IP Grade	IP40/IP30
	LED Drive mode	Constant Current	Working Temperature	-35C----+60C
	Display color	1M—69G	Working Humidity	10---70%



深圳市星光彩科技有限公司 Shenzhen Xing Guang Cai Technology Co., Limited

Regular packing:



Certifications: CE ROS FCC CCC

