


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 4 OF 34

1.0 GENERAL DESCRIPTION

1.1 Introduction

GV156FHM-N43 V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

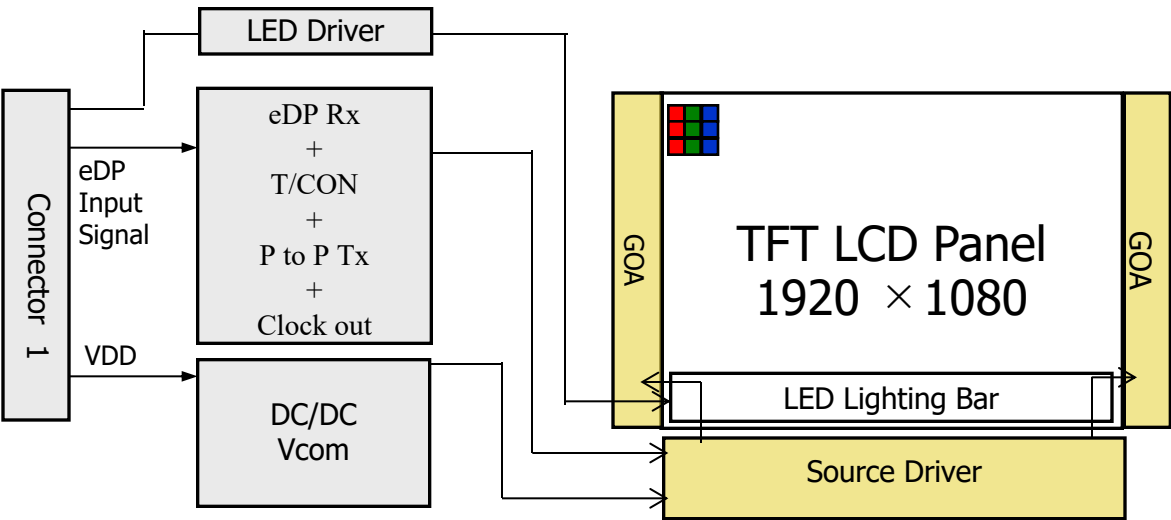

1.2 Features

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 5 OF 34

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model GV156FHM-N43 V8.0 (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.16 (H) × 193.59 (V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally Black		
Dimensional outline	359.5(H)*223.8(V) (W/PCB)*3.2(Max)	mm	
Weight	350 max	g	
Thickness	3.2max	mm	
Surface treatment	AG		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P _D : 1.0	W	@mosaic
	P _{BL} :3(max)	W	
	P _{total} :4	W	@mosaic

Notes : 1. LED Lighting Bar (40*LED Array)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE	PAGE	
	GV156FHM-N43 V8.0 Preliminary Product Specification	6 OF 34	

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings> Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{ss} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

- Notes :
1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
 2. Temperature and relative humidity range are shown in the figure below.
- 90 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

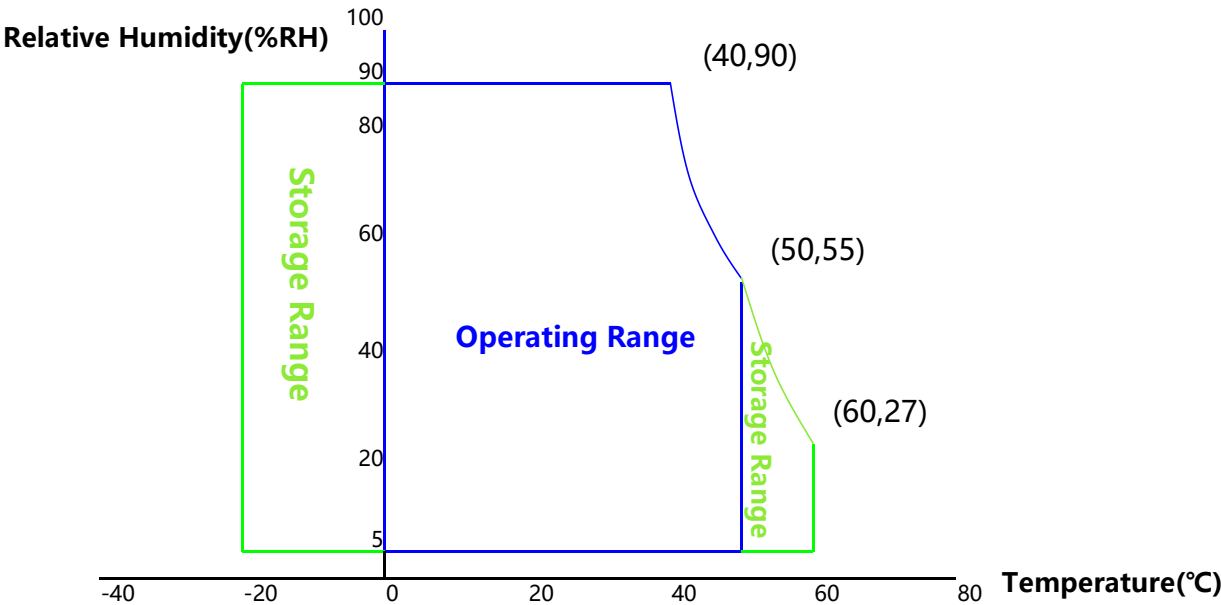


Figure 2. Temperature and Relative Humidity Range

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 7 OF 34

3.0 ELECTRICAL SPECIFICATIONS


3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C


Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	303	485	mA	Note 1
Power Supply Inrush Current	Inrush			1.5	A	Note3
Differential Input Voltage	V _{ID}	120	-	1200	mV	
Power Consumption	P _D	-	1.0	1.6	W	Note 1
	P _{BL}	-	-	3.5	W	Note 2
	P _{total}	-	-	5.1	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.
a) Typ. : Mosaic Pattern
b) Max.: R/G/B patterns

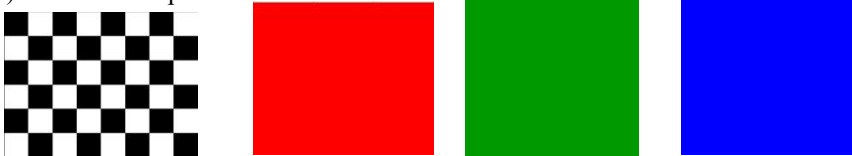

2. IF × VF × 40/ efficiency = PLED

3. Measure Condition

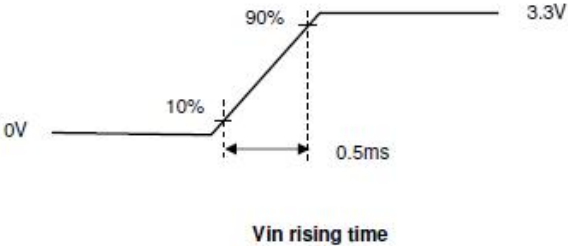


BOE	PRODUCT GROUP		REV	ISSUE DATE
	TFT- LCD PRODUCT		0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification			PAGE 8 OF 34

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications > Ta=25+/-2°C


Parameter		Min.	Typ.	Max.	Unit	Remarks	
LED Forward Voltage		V _F	-	-	3.0	V	-
LED Forward Current		I _F	-	24.27	-	mA	-
LED Power Consumption		P _{LED}		-	3.3	W	Note 1
LED Power Inrush Current		I _{rush}			1.5	A	Note4
LED Life-Time		N/A	15,000	-	-	Hour	I _F = 20mA
Power supply voltage for LED Driver		V _{LED}	5	12	21	V	
EN Control Level	Backlight on		2.2		5.0	V	
	Backlight off		0		0.6	V	
PWM Control Level	PWM High Level		2.2		5.0	V	
	PWM Low Level		0		0.6	V	
PWM Control Frequency		F _{PWM}	200	-	10,000	Hz	
Duty Ratio		-	1	-	100	%	Note3

- Notes : 1. Power supply voltage12V for LED Driver
- Calculator Value for reference $I_F \times V_F \times 40 / \text{efficiency} = P_{LED}$
2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.
4. Test condition:

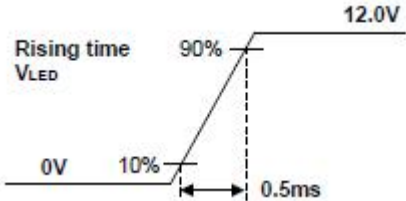

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 9 OF 34

3.3 LED structure

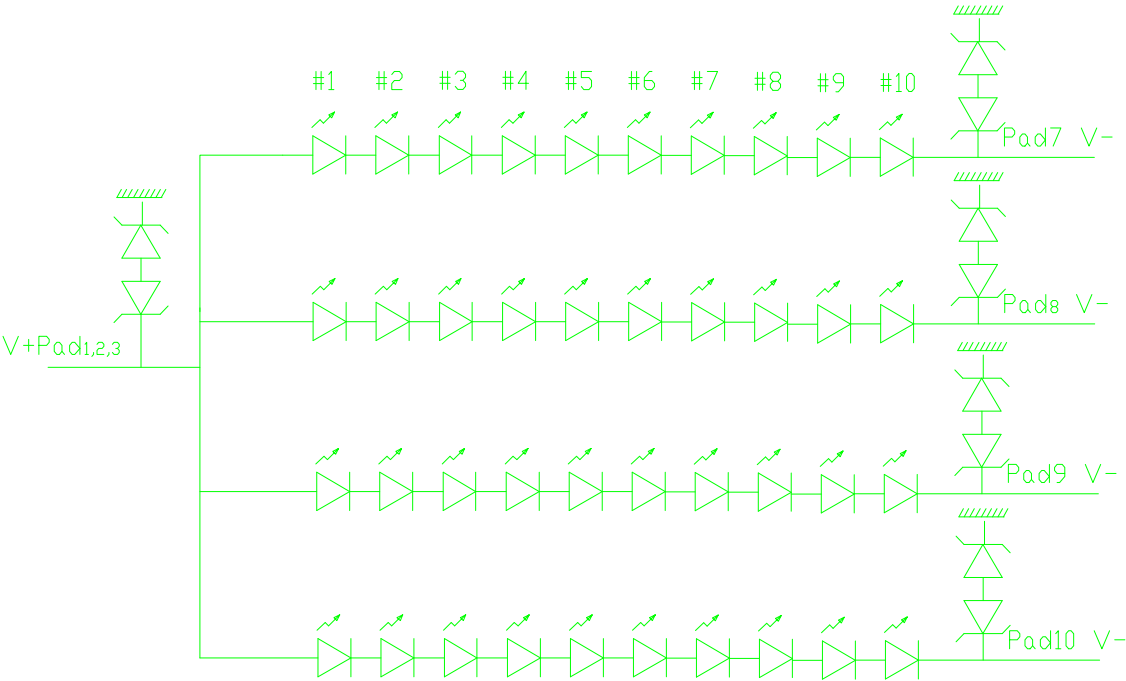

BOE	PRODUCT GROUP		REV	ISSUE DATE
	TFT- LCD PRODUCT		0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification			PAGE 10 OF 34

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm2^{\circ}\text{C}$) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta\varnothing=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta\varnothing=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta\varnothing=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta\varnothing=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or $\varnothing$, the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3\pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	-	85	-	Deg.	Note 1
		Θ_9		-	85	-	Deg.	
	Vertical	Θ_{12}		-	85	-	Deg.	
		Θ_6		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	800			Note 2
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$ $I_{LED} = 21.15mA$	-	300	-	cd/m ²	Note 3
White Luminance uniformity	5 Points	$\Delta Y5$		80	-	-		Note 4
	13 Points	$\Delta Y13$		65	-	-		
White Chromaticity		x_w	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 5
		y_w		0.299	0.329	0.359		
Reproduction of color	Red	x_R	$\Theta = 0^\circ$	-0.03	0.584	+0.03		
		y_R			0.364			
	Green	x_G			0.346			
		y_G			0.583			
	Blue	x_B			0.163			
		y_B			0.129			
Gamut				42	45		%	NTSC
Response Time (Rising + Falling)		T_{RT}	Ta= 25° C $\Theta = 0^\circ$	-	30	35	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 11 OF 34

Notes :


1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .
(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$
3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.
(see FIGURE 2 and FIGURE 3).
5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.
(See FIGURE 5).

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 12 OF 34


4.3 Optical measurements

Figure 1. Measurement Set Up

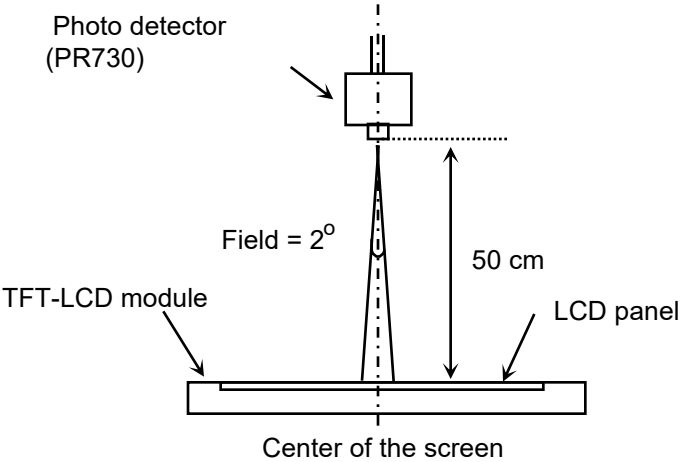

Optical characteristics measurement setup


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

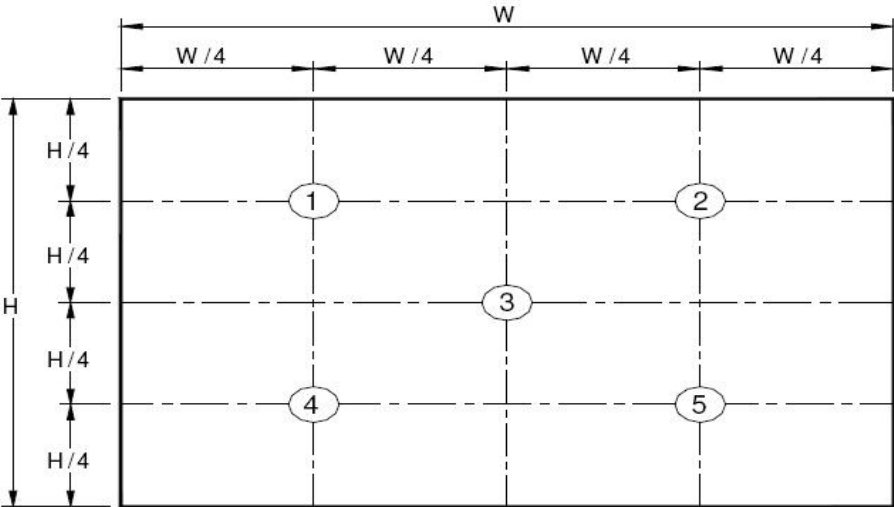

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification	PAGE 13 OF 34	

Figure 3. Uniformity Measurement Locations (13 points)

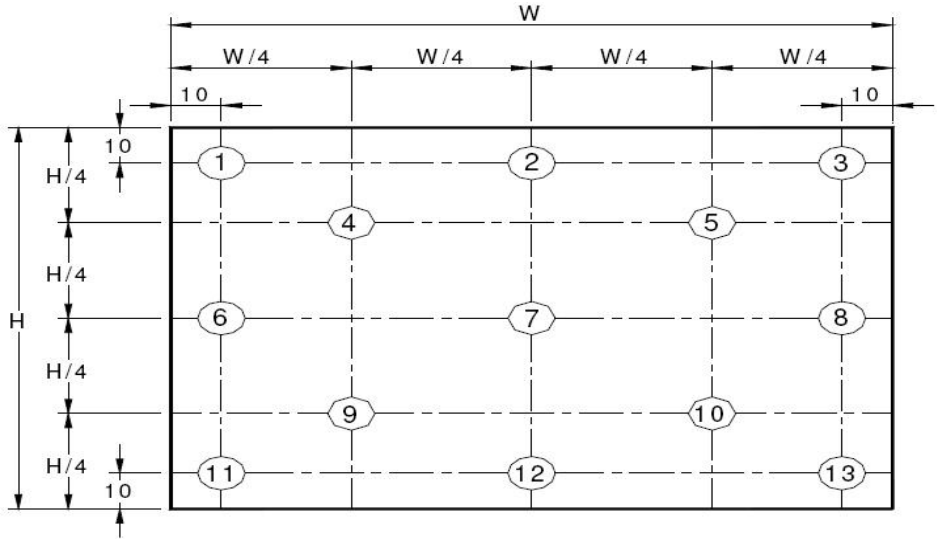

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2) , $\Delta Y13$ = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).


Figure 4. Response Time Testing

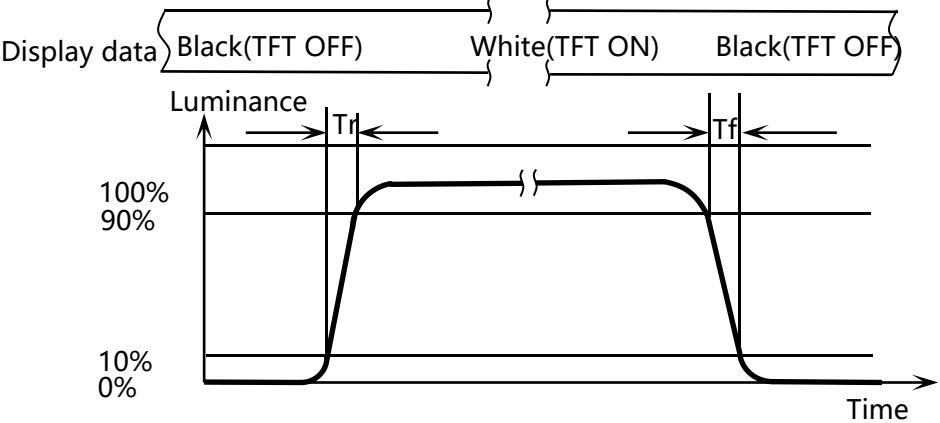

The electro-optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. T_r : The luminance to change from 10% to 90% , T_f : The luminance to change from 90% to 10% .

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2023.05.24
SPEC. NUMBER	SPEC. TITLE GV156FHM-N43 V8.0 Preliminary Product Specification		PAGE 14 OF 34

Figure 5. Cross Modulation Test Description

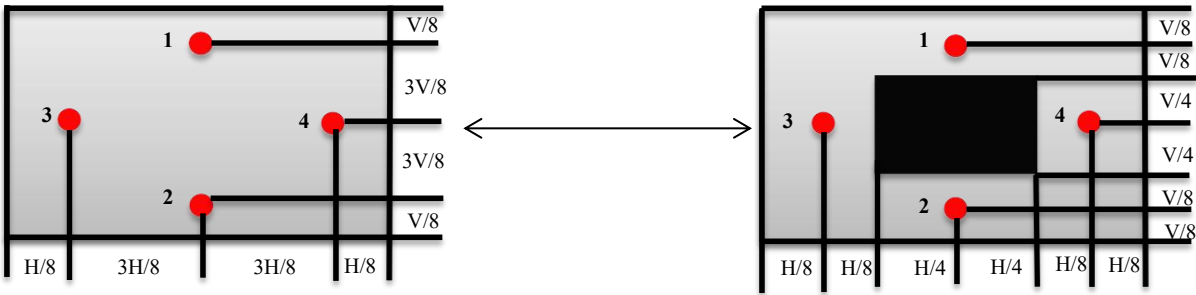

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location 1/2/3/4 measured will be exactly the same in both patterns. The test background gray is from L64 to L192.Take the largest data as the result.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark.(Refer to Figure 11)

The test system: PR730