

SR26 SERIES
ROTARY SWITCH UP TO 0.3A/ 125V
 Optional actuator, 1~12 positions



Electrical Rating

- | Load Rating: 125VAC 0.3A; DC30V/1A
- | Contact Resistance: $\leq 25\text{m}\Omega$ Initial
 $\leq 50\text{m}\Omega$ after 10000 cycles
- | Insulation Resistance: DC 500V 100M Ω MIN.
- | Dielectric Strength: AC 500V 1 minute.
- | Timing: Shorting or Non-shorting

Environmental


- | Temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- | Humidity: RH 30%~90%

Mechanical Characteristics


- | Operation force: 600 g $\pm$ 300 g
- | Soldering: 300 $^{\circ}\text{C}$ 3 sec.
- | Life: 10,000 cycles.

Remark : There are silicon grease in the contactors, Super-sonic cleaning are prohibited.


How to Order:

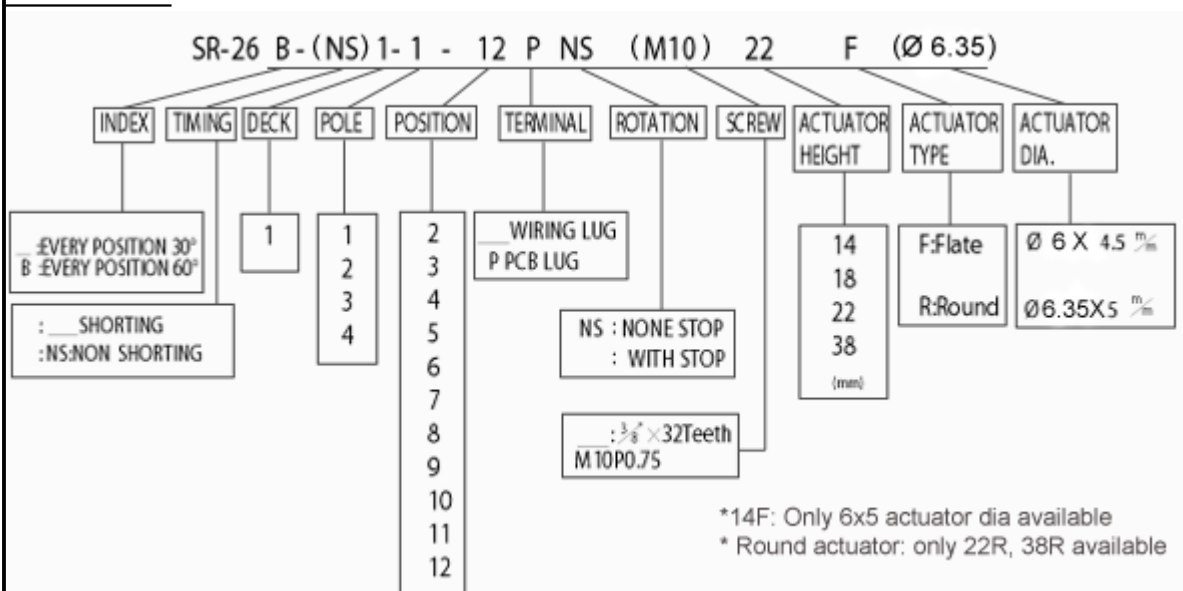

SR26NS-1-2-6P-
M10-14F

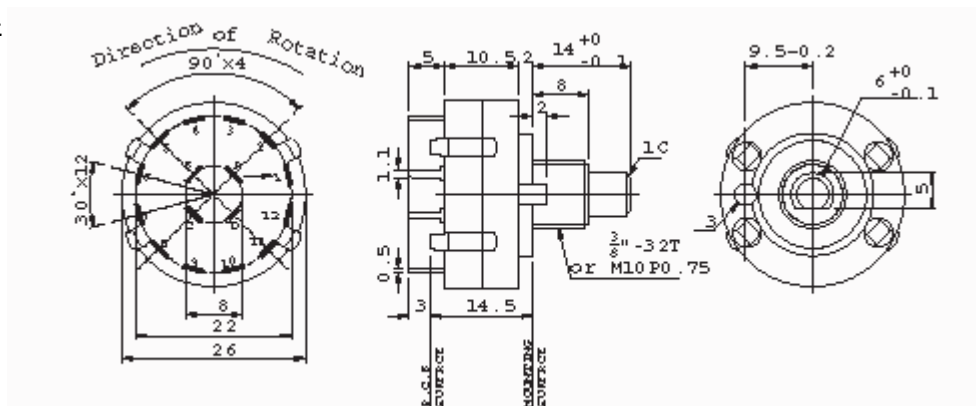

SR26NS-1-4-3-
38R

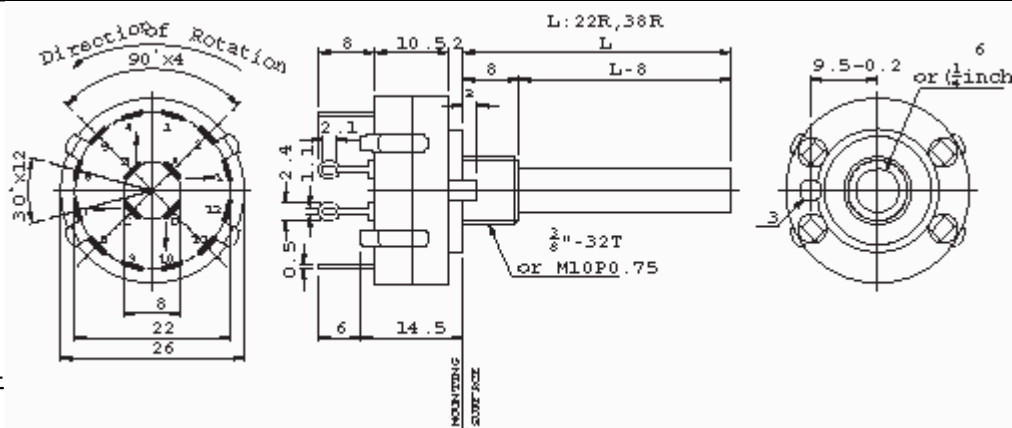

SR26NS-1-3-4-
18F

