

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min


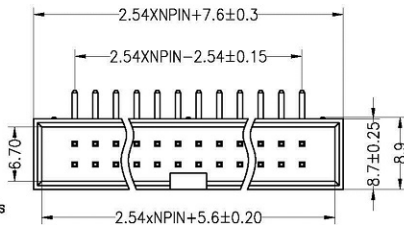
Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni


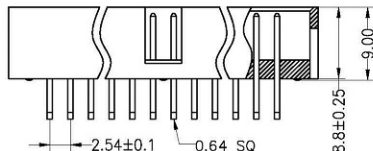
Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3288 2 XX XX X R 01 (X)

No. of
Pins
Per Row
6-64Contact
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SD:Gold Flash/Tin
SN:TinPlating
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCPInsulator Material
Option
A=Tray
T=Tube

					OPERATION		DRAW	YTYuSheng	12.03.28	SCALE	FIT	 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5982		
				X.X	±0.30	UNIT				mm				
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.			32882XXXXR01
				X.XXX	±0.10				SHEET	1/1				
A0	2012.03.28	NEW DRAWING				Angle ±3°	APPROVE			PROJ.		TITLE:	2.54mm Box Header H8.8mm 90° L=16.5/L=21.5	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	DIM TOL								