



Category

SWITCH

- MICRO/DETECTOR SW

- ROCKER SW

- PUSH SW

- TOGGLE SW

- ANTI-VANDAL SW

- CAPACITANCE SW

- SLIDE SW

- PRESSURE SW

- ROTARY SW

- DIP SW

- TACT SW

- LIGHTED TACT SW

- KEYLOCK SW

- SAFETY & CONTROL SW

- VEHICLE SW

SOCKET

WIRE HARNESS

BREAKER



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [Aesthetic IP68 MR-2 Series](#) ▶ [Aesthetic IP68 MR-2 Series](#)

SWITCH / ROCKER SW

Aesthetic IP68 MR-2 Series Patented Standard Mini Rocker Switch with IP68 Protection, Approved to UL, CUL & ENEC, up to 16(8)A

13x19mm standard mini rocker switches with IP68 protection level

Unique aesthetic designed
ON-OFF or ON-ON function
Quick connect terminals
International patented

[PDF Download](#)

[Get Information](#)

[Print this page](#)



[ZOOM IN](#)

Feature

**FUSE HOLDER****FUSE****ENCODER****INDICATOR****POTENTIOMETER****CONNECTOR****WATERPROOF CONNECTOR****WATERPROOF PARTS****PCBA****NEW PRODUCT**

- 10(4)A 125/250V~T55, (cURs,ENEC15)
- 16(8)A 125/250V~T55, (cURs,ENEC15)
- 16RA 30VDC T55 , IP68 (cURs,ENEC15)
- Initial contact resistance : 20m ohm (max.)
- Insulation resistance : 100M ohm (min,) at 500VDC
- Dielectric strength : 1,500VAC for 1 minute
- Electrical life : 10,000 cycles
- Switch for Class II appliances
- Base : Nylon 66, UL rated 94V-2 min
- Actuator : Nylon 66, UL rated 94V-2 min
- Spring : Piano wire
- Contact : Silver alloy
- Terminals: Silver plated Copper
- China patent no: ZL201720184354.5

Products Search



Specification

How to order

MR2 - <u>1</u>	<u>2</u>	<u>0</u>	<u>C</u>	<u>2</u>	<u>N</u>	-	<u>N</u> ...
Pole	Function	Terminal	Actuator	Marking	Marking color	Lamp	
1: 1 pole	1: off-on 2: on-on	0: quick connect	C: curve	2: none 5: O —	N: none	N: none	

B

B

P - 29NC

Base color	Actuator color	IP68 Rating
B: black W: white	B: black W: white	P : 10(4)A 125/250V~ T55 Q: 16(8)A 125/250V~T55 R: 16A (6~30V d.c) T55

Panel cutout




Snap-in Panel Cutout
X=Panel Thickness

X	Dim.Y	Dim.Z
0.75 to 1.25mm	19.2 + 0 / -0.1	12.9 + 0.15 / - 0
1.25 to 2 mm	19.4 + 0 / -0.1	12.9 + 0.15 / - 0
2 to 3 mm	19.8 + 0 / -0.1	12.9 + 0.15 / - 0

Item

MR2-120C2N-NBBP-29NC

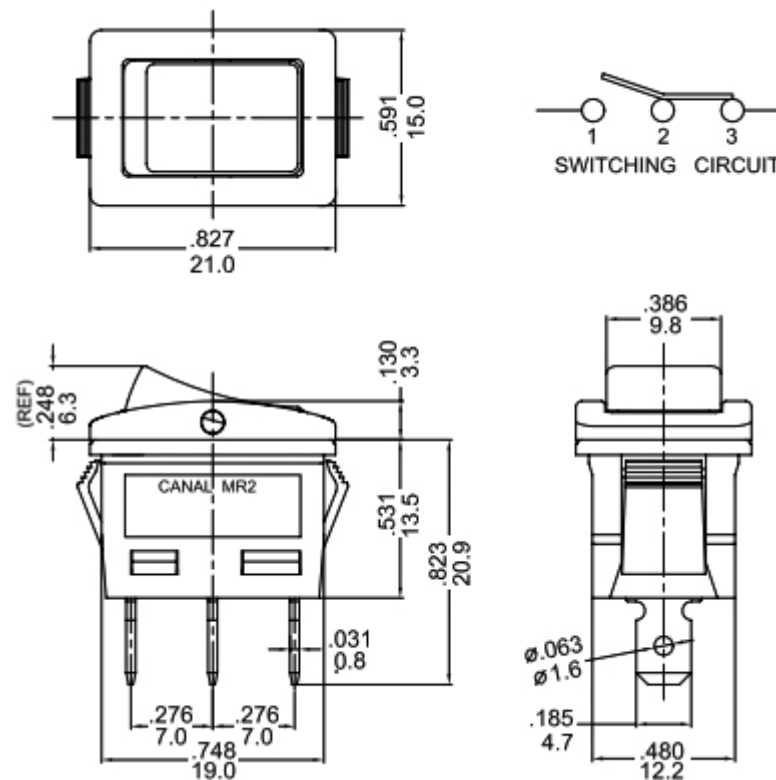

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved