


Cable Structure:

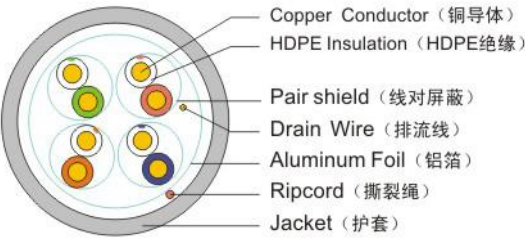

Electrical Characteristics

Frequency (MHz)	Impedance (ohm)	Return Lose ($\geq$ Db/100m)	Attenuation ($\leq$ Db/100 m)	NEXT ($\geq$ Db/100m)	ELEFEXT ($\geq$ Db/100m)	PS NEXT ($\geq$ Db/100m)	PS ELFEXT ($\geq$ Db/100m)	Impedance (ohm)	NVP
1	85~115	20.0	1.9	74.0	68.0	72.3	65.0	≤ 45	70%
4		23.0	3.7	65.0	56.0	63.3	53.0		
8		24.5	5.3	60.7	49.9	48.8	46.9		
10		25.0	5.9	59.0	48.0	57.3	45.0		
16		25.0	7.5	56.0	43.9	54.2	40.9		
20		25.0	8.4	55.0	42.0	52.8	39.0		
25		24.3	9.5	53.3	40.0	41.3	37.0		
31.25		23.6	10.6	52.0	38.1	49.9	35.1		
62.5		21.5	15.4	47.0	32.1	45.4	29.1		
100		20.1	19.8	44.0	28.0	42.3	25.0		
200		18.0	29.0	40.0	22.0	37.8	19.0		
250		17.3	32.8	38.3	20.0	36.3	17.0		
300	78~122	16.8	36.4	37.1	18.5	34.1	15.5	≤ 45	70%
500		15.2	48.9	33.8	14.0	30.8	11.0		