


UL2468

BOR

RoHS & REACH compliant

环保

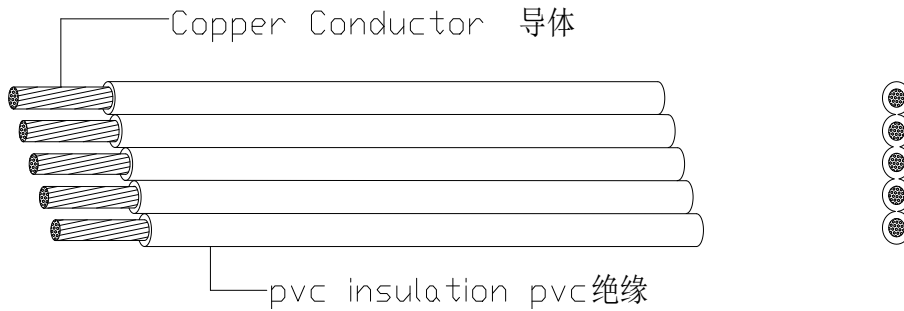

PRODUCT DESCRIPTION

- ★ Rated temperature: 80°C
- ★ Rated voltage: 300V
- ★ According to: UL Subject 758, UL1581, C22.2
- ★ Solid or stranded, tinned or bare copper conductor 32--16AWG
- ★ PVC insulation
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ For general purpose internal wiring of appliance

产品说明

- ★ 额定温度: 80°C
- ★ 额定电压: 300V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合32--16AWG镀锡
- ★ 聚氯乙烯绝缘
- ★ 通过UL VW-1以及CSA FT1垂直燃烧
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于一般电子, 电器设备内部连线

AWG/NO.OFCOND	Finished Products			
	Cond No.	Insulation Avg. Thick.	Outside Dia.	Packing
	/mm	mm	mm	m/r
30×2C	7/0.1	0.45	1.20×2.50	610
28×2C	7/0.127	0.45	1.30×2.70	610
26×2C	7/0.16	0.45	1.40×2.90	610
24×2C	11/0.16	0.45	1.50×3.10	610
22×2C	17/0.16	0.45	1.70×3.50	610
20×2C	21/0.178	0.45	1.90×3.90	305
18×2C	34/0.178	0.45	2.10×4.30	305
16×2C	26/0.254	0.45	2.40×4.90	305

博尔特（漳州）

T cable

引领未来

或裸铜丝

测试

Maximum Resistance at 20°C
Ω/mm
354.33
223.75
139.76
88.36
60.16
38.58
22.98
15.06

电缆有限公司