



①	1	在009基础上更改了TP IC为CHSC5816 主FPC的TP焊盘下移	ZJL	2021-11-26 2021-11-27
---	---	---	-----	--------------------------

正视图

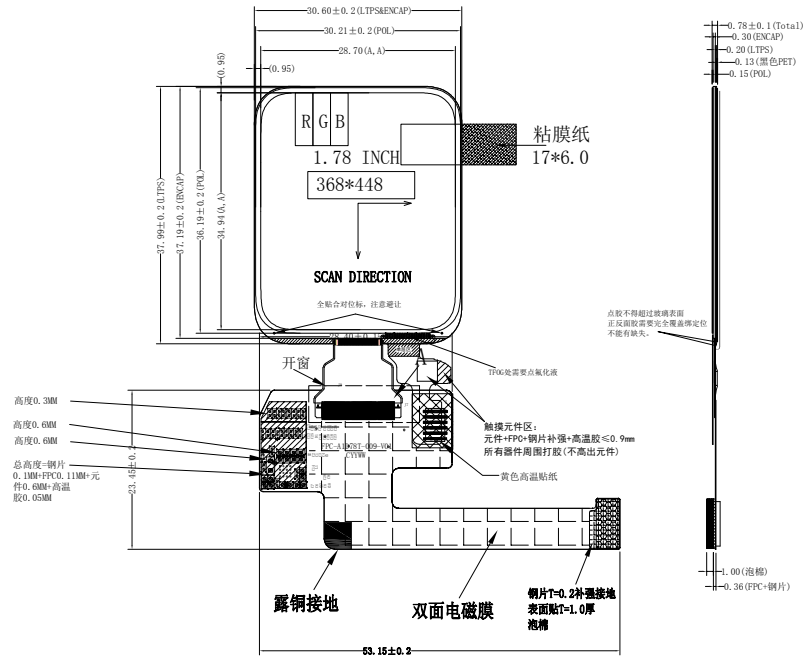


侧视图

背视图

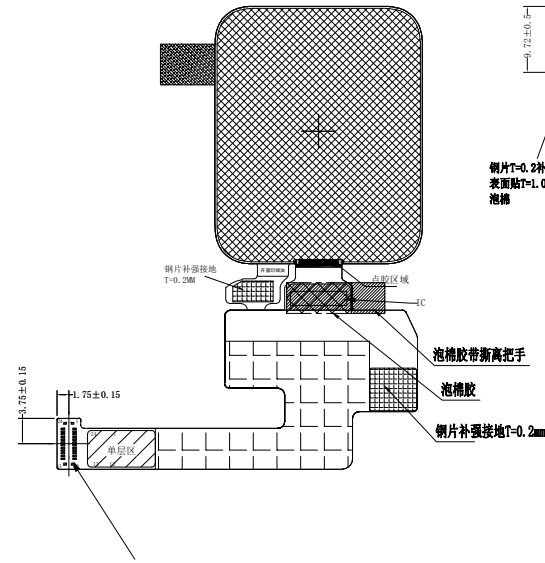

YXT-BB10-24P-02

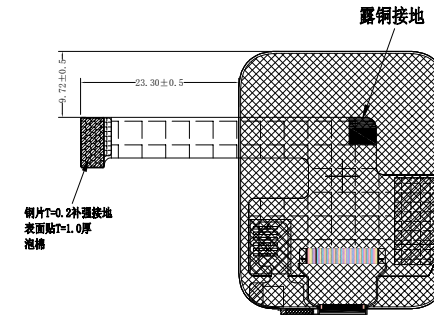

弯折示意图

展开出货

MAIN	FPC PIN	DESCRIPTION
1		LCD_RST
2		GND
3		LCD_TE
4		LCD_CS
5		LCD_CLK
6		LCD_SIO1
7		LCD_SIO0
8		GND(热插拔管脚, 需接地)
9		NC
10		NC
11		Vbat
12		Vbat
13		GND
14		GND
15		VDDIO(3.3V)
16		TPVDD(3.3V)
17		TP_INT
18		TP_RST
19		TP_SDA
20		TP_SCL
21		GND
22		LCD_SIO3
23		LCD_SIO2
24		VCI_EN

Pin#	Assignment
1	TP_SCL
2	TP_SDA
3	TP_RESET
4	TP_INT
5	TP_VCC
6	GND

Notes (AMOLED):

1. Display Type: 1.78"368*448 LTPS-AMOLED(Oncell);
2. Driver IC: 敦泰 FT2308 TP IC: CH35816
3. W/O CG Luminance: 500cd/m²(TYP), 450cd/m²(MIN);
4. White (X, Y): x=0.29±0.02, y=0.31±0.02;
5. NTSC: 100%tp;
6. Viewing Direction L/R/U/D: 88/88/88/88;
7. General Tolerance: ±0.20 ;

Unless Otherwise Specified Tolerance of Radius: R0.3;

8. Flatness AMOLED bottom side ≤0.25mm;
9. CONFORMITY WITH ROHS & HALOGEN FREE REQUIREMENT;
10. OPERATING TEMPERATURE: -20° C TO 70° C;
STORAGE TEMPERATURE: -30° C TO 80° C;

 HARESAN 华尔升 SHENZHEN HARESAN ELECTRONICS CO.,LIMITED 深圳市华尔升电子有限公司						DRAWING TITLE:		MD	
						DRAWING No. :		MD-A1D78T-011	
DESIGN	ZJL	CHECK	YPT	APPROVE	XQC	REV. : 01		SCALE :	
DATE	2021.11.26	DATE	2021.11.26	DATE	2021.11.26	PROJECTION:		UNIT : mm	
								SHEET : 1 / 1	