



Rental LED Screen




Product Information

HD Display
Energy Efficient
High Reliability
Easy Maintenance
Wide Viewing Angles
IP65 Waterproof Rating



Module size:250*250mm

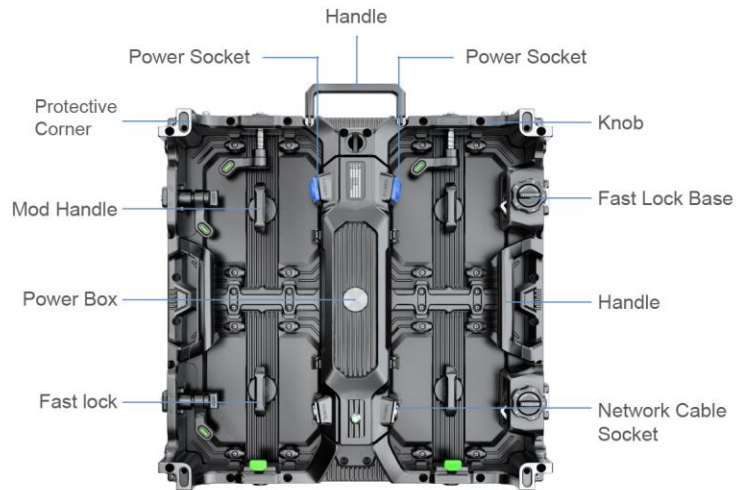


Cabinet size:500*500*75mm Weight:7.8kg

Fast Installation/Easy Maintenance

- Support both front and rear maintenance.
- 1 person could handle the installation easily.
- Fast locks could be easily locked and unlocked.
- Extra rear handle design, independent power box.
- Modular design, pin connection, corners protection.

Curved lock system

- Unique curved connection design.
- Support concave and convex connection.
- Support $\pm 6^\circ$, 0° , $\pm 3^\circ$ arc adjustable.

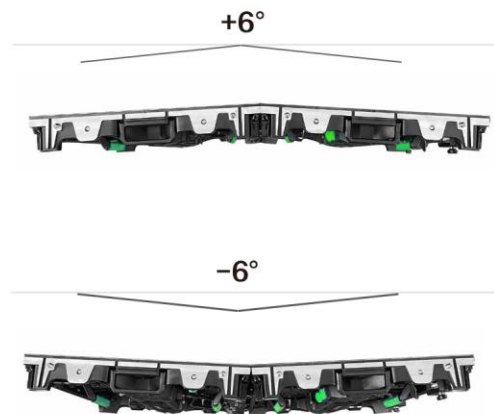


Technical parameter:(T=25°C)(Indoor)

Pixel Pitch	1.95mm	2.6mm	2.97mm	3.9mm
Pixel Structure	3INI SMD	3INI SMD	3INI SMD	3INI SMD
Pixel Density	262144/m ²	147456/m ²	112896/m ²	65536/m ²
Module Resolution	128 (W) *128 (H) dots	96 (W) *96 (H) dots	84 (W) *84 (H) dots	64 (W) *64 (H) dots
Module Size (WXH)	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm
White Balance Brightness	800-1000cd/m ²	800-1000cd/m ²	800-1000cd/m ²	800-1000cd/m ²
Color Temperature	2000K—12500K	2000K—12500K	2000K—12500K	2000K—12500K
Horizontal Viewing Angle	≥160°	≥160°	≥160°	≥160°
Vertical Viewing Angle	≥140°	≥140°	≥140°	≥140°
Optimal Viewing Distance	≥2meters	≥3meters	≥3 meters	≥4 meters
Contrast	≥5000:1	≥5000:1	≥5000:1	≥5000:1
Grayscale	12-14Bit	12-14Bit	12-14Bit	12-14Bit
Refresh Rate	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ
Continuous Working Time	≥72H	≥72H	≥72H	≥72H
Life Span	100, 000 H	100, 000 H	100, 000 H	100, 000 H
Protection Class	IP20	IP20	IP20	IP20
Operating Voltage	DC 4.2-5V	DC 4.2-5V	DC 4.2-5V	DC 4.2-5V
Maximum Power Consumption	700W/m ²	700W/m ²	700W/m ²	700W/m ²
Average Power Consumption	260W/m ²	260W/m ²	260W/m ²	260W/m ²

Technical parameter:(T=25°C)(Outdoor)

Pixel Pitch	2.97mm	3.9mm	4.8mm
Pixel Structure	3INI SMD	3INI SMD	3INI SMD
Pixel Density	112896/m ²	65536/m ²	43264/m ²
Module Resolution	84 (W) *84 (H) dots	64 (W) *64 (H) dots	52 (W) *52 (H) dots
Module Size (WXH)	250mm*250mm	250mm*250mm	250mm*250mm
White Balance Brightness	≥4000cd/m ²	≥5000cd/m ²	≥5000cd/m ²
Color Temperature	2000K—12500K	2000K—12500K	2000K—12500K
Horizontal Viewing Angle	≥160°	≥160°	≥160°
Vertical Viewing Angle	≥140°	≥140°	≥140°
Optimal Viewing Distance	≥3meters	≥4 meters	≥5 meters
Contrast	≥5000:1	≥5000:1	≥5000:1
Grayscale	12-14Bit	12-14Bit	12-14Bit
Refresh Rate	≥3840HZ	≥3840HZ	≥3840HZ
Continuous Working Time	≥72H	≥72H	≥72H
Life Span	100, 000 H	100, 000 H	100, 000 H
Protection Class	IP65	IP65	IP65
Operating Voltage	DC 4.2-5V	DC 4.2-5V	DC 4.2-5V
Maximum Power Consumption	850W/m ²	850W/m ²	850W/m ²
Average Power Consumption	300W/m ²	300W/m ²	300W/m ²

Typical Applications

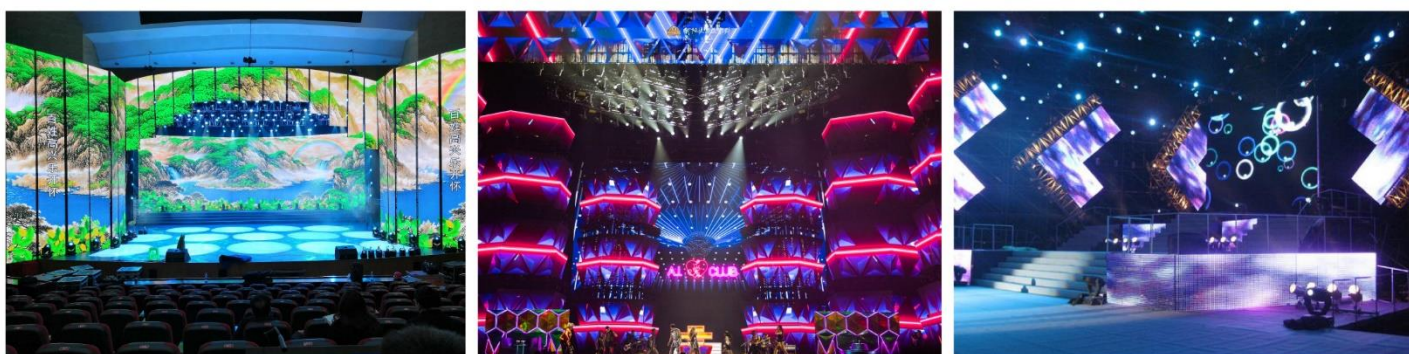

LED Screen Manufacturer in CHINA
Shenzhen Weigu Electronic Technology Co. Ltd
Phone: +86-151-1804-3086
E-Mail: Linda@vegooled.com

