


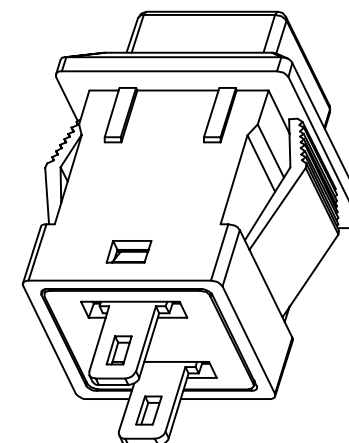

1. 电路 CIRCUIT:ON/OFF
2. 额定值 RATING:1.5A 250VAC 3A 125VAC
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘阻抗 INSULATION RESISTANCE: >100MΩ
(500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINTUTE
6. 所有部件均使用环保材料

ALL MATERIALS USING MEET THE RoHS DIRECTIVE

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				GYW 2022.02.21	SCALE	NO		
3	→	8	→	X	±0.30					MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.			
1	→	6	→	X.XX	±0.10								
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				MPS01-BBCAA-A-R	*****	AO	