

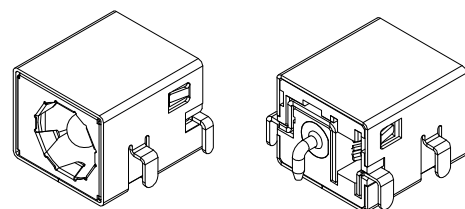
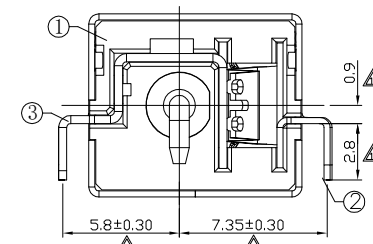




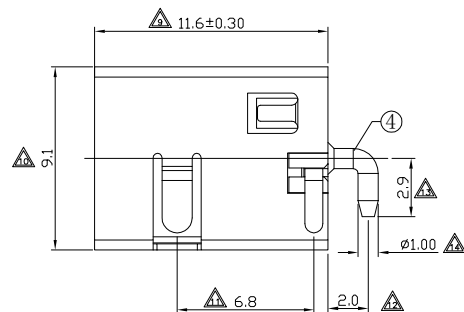


RoHS
Compliant

Level-1 Controlled Substances are banned

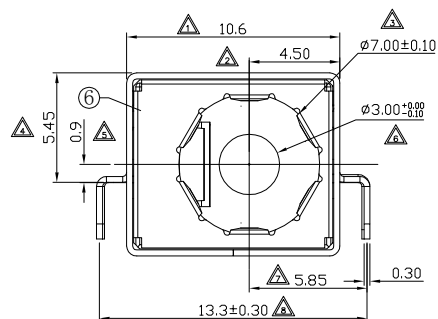


SCHEMATIC

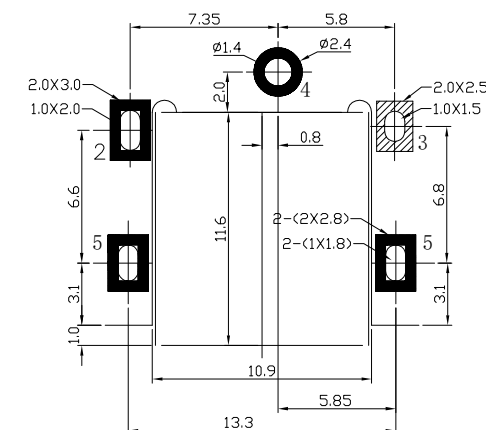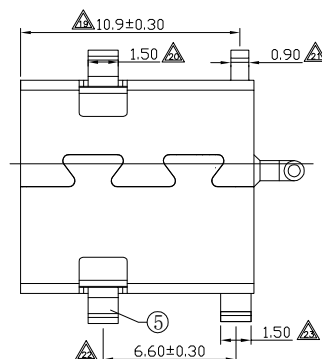

SPECIFICATION

- 1.Rating : DC 20V 5.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.
- 7.Marked Δ are important dimensions.



DC MATE PLUG

6	SPRING PIECE	1	SUS301	—	—
5	COAT	1	IRON	—	Ni-Plating
4	PIN	1	ZINC ALLOY	—	Ni-Plating
3	CONTACT FOOT	1	BRASS	—	Ag-Plating
2	SPRING PIECE	1	BRONZE	—	Ag-Plating
1	HOUSING	1	PA10T	—	—
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED



盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

General	Angle
X ± 0.50	X °± 3°
XX ± 0.30	XX °± 2°
XXX ± 0.20	XXX °± 1°
XXXX ± 0.10	

CUSTOMER
COPY

TITLE:

DC-JACK

PART NO.

DJ-D300E

PROJ:

SCALE: 4:1

UNIT:mm

SIZE: A4

SHEET: 1 OF 1