
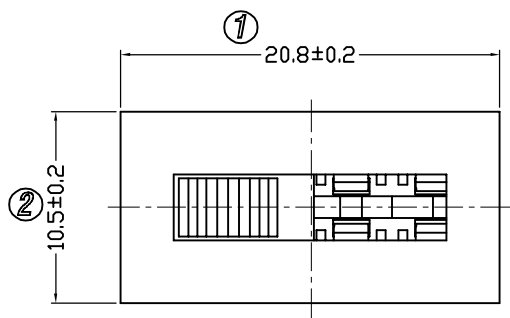
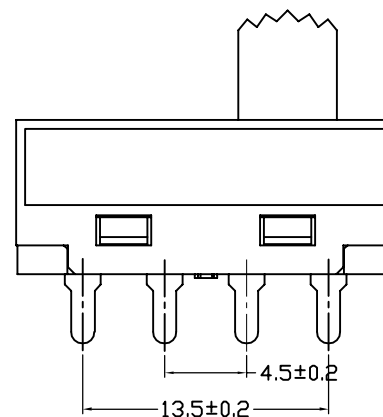
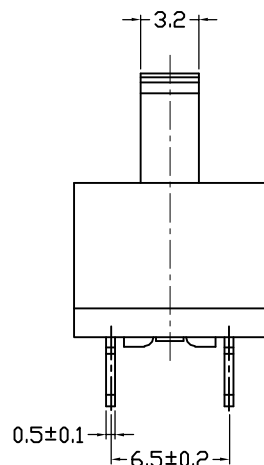


PCB. LAYOUT

NOTES:

1. Rating: 6A 125/250VAC (UL; CUL)
6A 42VDC (UL; CUL)
2. Contact resistance: $<50\text{m}\Omega$
3. Insulation resistance: $>100\text{M}\Omega$
(500VDC between open contacts)
4. Dielectric strength: $>1500\text{V}$ 1 minute
5. Color: cover is black, body is black.
button is black

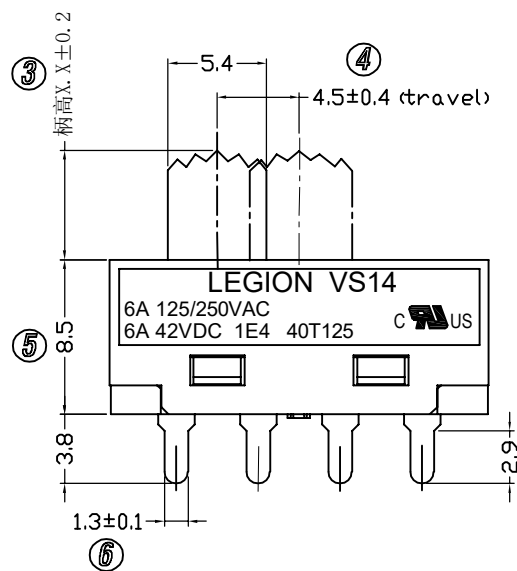

品 名	柄高X. X
VS14-C23DBD06-A03	3. 0
VS14-C23DBD06-A06	6. 0
VS14-C23DBD06-A08	8. 0
VS14-C23DBD06-A10	10. 0
VS14-C23DBD06-A12	12. 0

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				LMC	SCALE	NO		
3	→	8	→	X	±0.30				2023.07.03	MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	→	6	→	X.XX	±0.10					VS14-C23DBD06-A**		*****	A0
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	LEGION ELECTRONIC & HARDWARE CO., LTD.							