



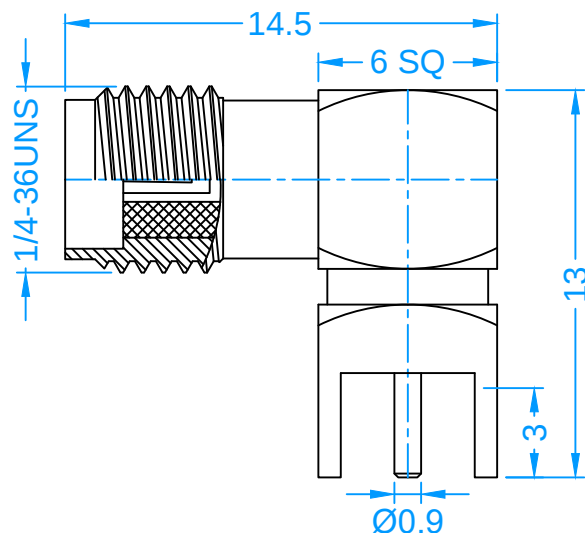

Meets MIL-C-39012, IEC60169-15, CECC 22110
Precision Machined and High Quality Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
VSWR	≤1.20
Working Voltage	<335V r.m.s
Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ
Durability	≥500 cycles
Temperature Range	-55°C to 125°C

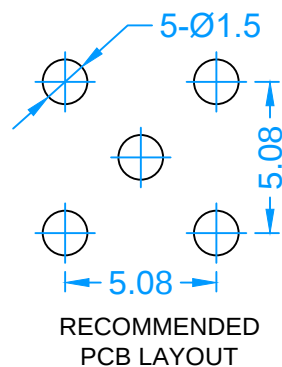

3	Contact	1	Beryllium Copper	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

RoHS Compliant	* MAJOR DIMENSION			
	UNLESS OTHERWISE NOTED TOLERANCES			
 THIRD ANGLE PROJECTION				

SCALE	1:1	UNIT	MM
-------	-----	------	----

APPROVED	JOHN
CHECKED	TERRY
DRAWN	KEVIN
DRAWN DATE	20 Aug. 2009

KM KeMy Electronic Technology Inc.	
TITLE	SMA (F) Jack, Right Angle, for PCB
DRAWING NO.	KM-010143-5
REV	0