



FRAME CORE CHOKES

Introduction:

- 1.The series products contains:
- 2.The figure shown for reference only; Better at providing ODM/OEM to customers.
Make the technical parameters more size up the user's product design requirements.


FEATURES:

Small size, Low leakage flux due to D SQ core.
Low stray capacitance, High attenuation of a wide frequency band.
There is no danger of the layer short for the single-layer rolling.
High attenuation to the normal mode noise.
Winding time 90% down.
High inductance was achieved by the ferrite mixing and the baking technology that developed originally.


SPECIFICATION:

Rated Voltage: AC/DC 250V.
Operating Temperature Range: -40°C - 120°C
Withstanding Voltage: AC 2000V 60sec or AC 2400V
1~2sec [LINE to LINE].
Insulation Resistance: DC 500V, 100MΩ Min
[LINE to LINE].
Temperature Rise: 40°C Max. at Rated Current.

Electronical Schematic



PHYSICAL CHARACTERISTICS

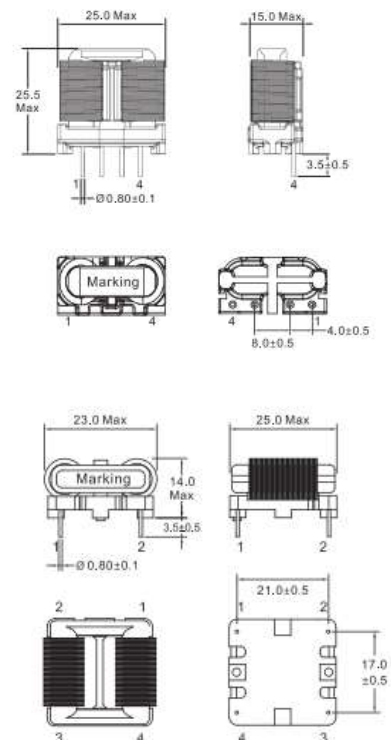

General Properties

Operating
Temperature: -40°C to +105°C.
Including temp rise
Storage Temperature: -25°C to +85°C.
Insulation Class: B.