
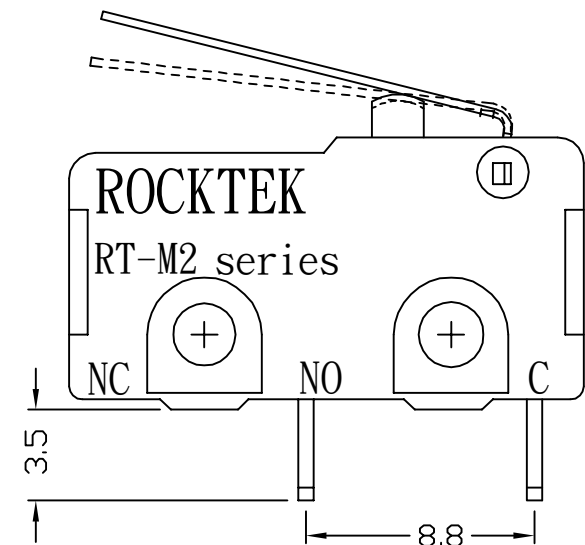
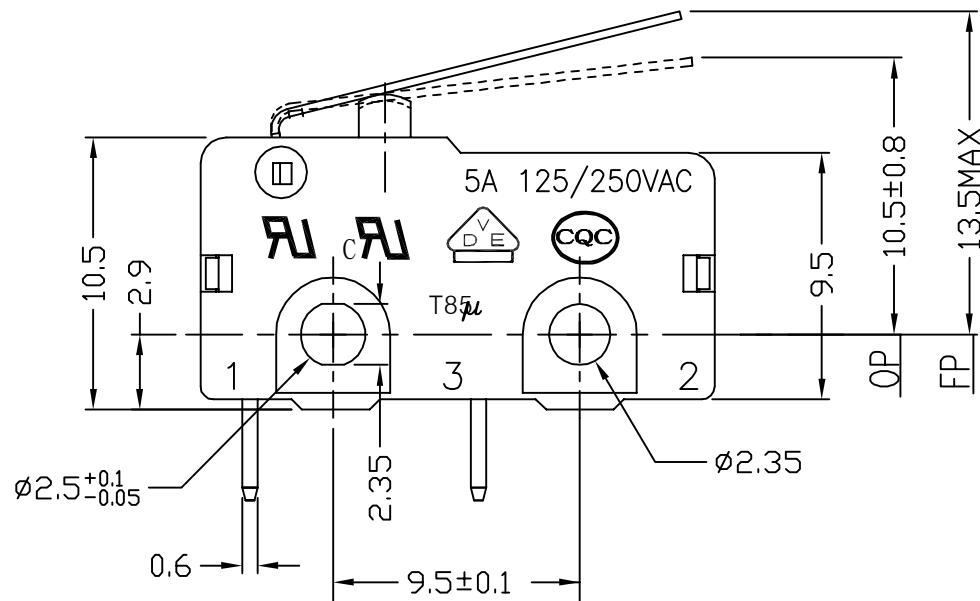


NOTES:

1. RATING: 5A125/250VAC.
2. OPERATING FORCE: 10~100gf
3. CONTACT RESISTANCE: <50mΩ
4. INSULATION RESISTANCE: >100MΩ (500VDC BETWEEN OPEN CONTACTS)
5. DIELECTRIC STRENGTH: >1500Vac 0.5mA 1 MINUTE
6. COLOR: BLACK

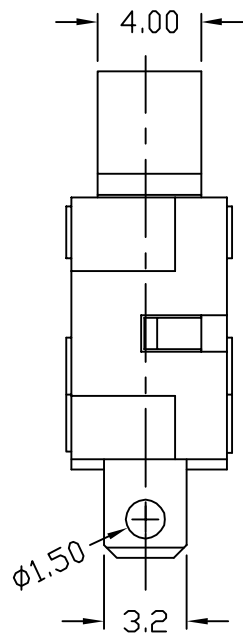

	→		→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN		MM		
	→		→	RANGE	TOLERANCE					SCALE	FIT			
	→		→	X	±0.4					MAT'L	***			
	→		→	X.X	±0.3					MATERIAL NO.		DRAWING NO.	REV	
	→		→	X.XX	±0.2					RTM2-8C4S05C200		*****	A	
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±0.5°	ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.								