


CAST IRON/DUCTILE IRON Y STRAINER THREAD ENDS (125PSI/150PSI TO ANSI STANDARD)

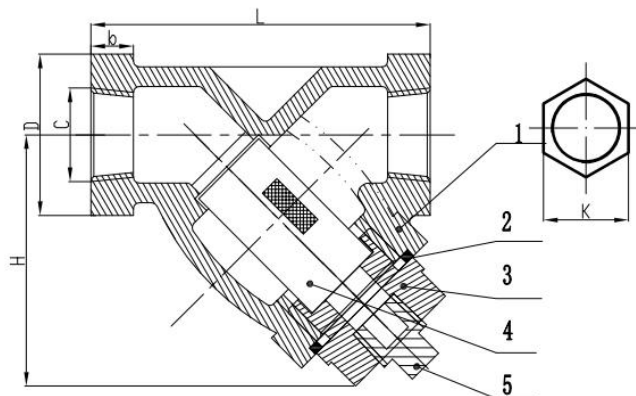

TECHNICAL DATA:

- 1) Working Pressure: 125PSI(C.I.) / 150PSI(D.I.)
- 2) Shell Pressure: 300PSI; Seat Pressure: 200PSI
- 3) Face to face Dimensions conform to ANSI Class 125/150
- 4) Thread conform to NPT or BSP
- 5) Suitable Media: water, oil, gas, Steam.

MATERIAL LIST			
NO.	NAME	MATERIAL	AMERICAN STANDARD
1	BODY	CAST IRON	ASTM A126 CLASS B
2	SCREEN	STAINLESS STEEL	ASTM SS304
3	GASKET	O-RING OR GRAPHITE	
4	BONNET	CAST IRON	ASTM A126 CLASS B
5	PIUG	CAST IRON	ASTM A126 CLASS B

DIMENSION LIST (MM)						
DN	L	C	D	b	H	K
1/2"	76	NPT 1/2"	42	10	52	36.2
3/4"	102	NPT 3/4"	48	15	65	41.568
1"	124	NPT 1"	58	15	81	50.288
1 1/4"	132	NPT 1 1/4"	73	16	97	64.4
1 1/2"	146	NPT 1 1/2"	82	16	103	71
2"	184	NPT 2"	100	25	117	86.6
2 1/2"	229	NPT 2 1/2"	118	28	145	102
3"	254	NPT 3"	136	30	172	117
REMARK: "C"---BSP or any standard of thread as per ordered available						