

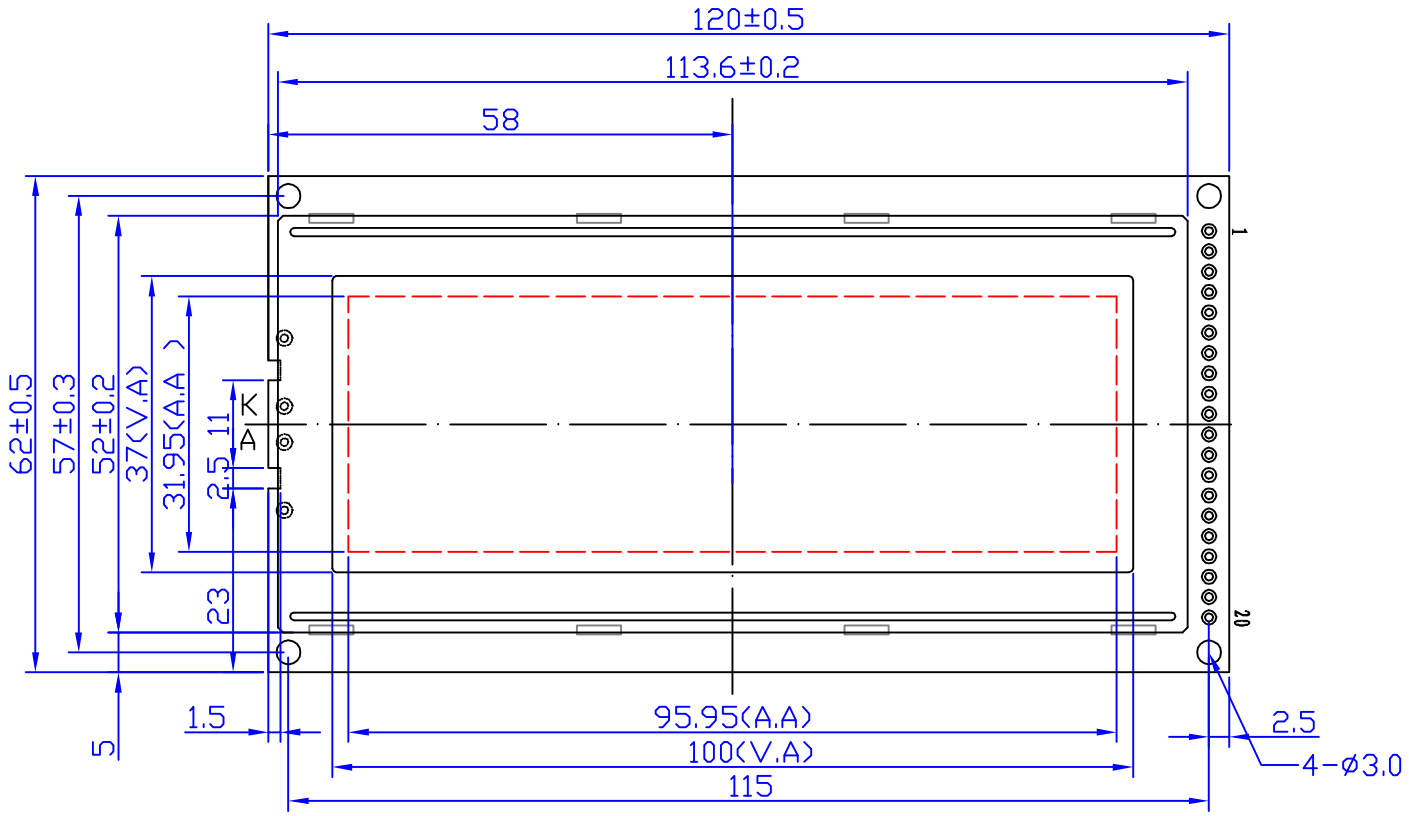


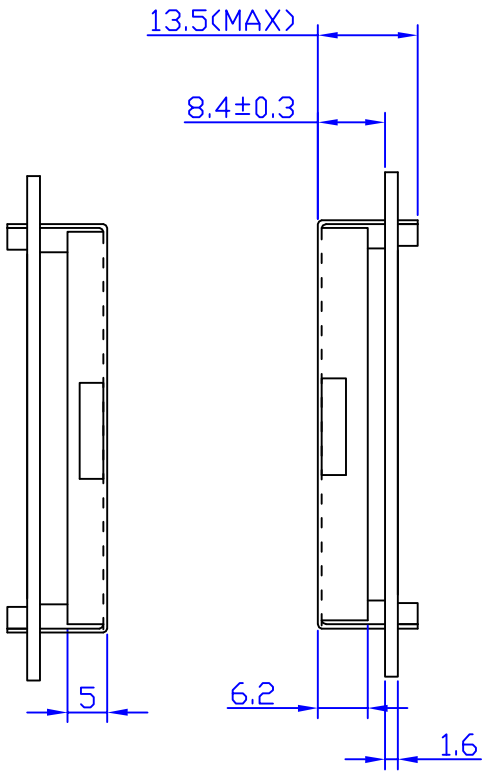

LED BOTTOMLIGHT



UNIT: mm

NOTE:

1. UNLESS ORTHERWISE SPECIFIED TOLERANCE: ± 0.2mm
2. LCD:STN YELLOW-GREEN, POSITIVE, TRANSFLECTIVE
3. VIEWING DIRECTION: 6:00
4. MODULE DRIVING: 5.0V
5. BACKLIGHT: LED BOTTOMLIGHT, YELLOW-GREEN COLOR
6. OPERATING TEMP. RANGE: 0° C TO 50° C
   STORAGE TEMP. RANGE: -10° C TO 60° C

INTERFACE PIN CONNECTIONS

PIN	SIGNAL	PIN	SIGNAL
1	VSS	11	DB3
2	VDD	12	DB4
3	V0	13	DB5
4	VEE	14	DB6
5	D/I	15	DB7
6	R/W	16	CS1
7	E	17	CS2
8	DB0	18	CS3
9	DB1	19	RST
10	DB2	20	LED+

ECM19264B

REVISION RECORD

VER	Date	Modify Contents	Name	Confirm
2				
3				
4				
5				
6				

Drawn: ALAN

Model Name: ECM19264B-v1.1

Checker:

Date: 2007.05.21

Approved: