


Terminal Blocks, PA & Brass Type



- Available in polyamide 66, UL 94V-2 or 94V-0 flame-retardant housing respectively rated at T110 or T140 (IEC), 105°C/221°F (UL).
- Metal parts feature steel screws and nickel-plated brass contacts with spring steel wire protectors.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Integrated wire protectors prevent twisting and breakage of stranded conductors.
- Modular 12-circuit design can be cut into desired number of poles.
- Certified to IEC/EN 60908 and Recognized to UL 1059.

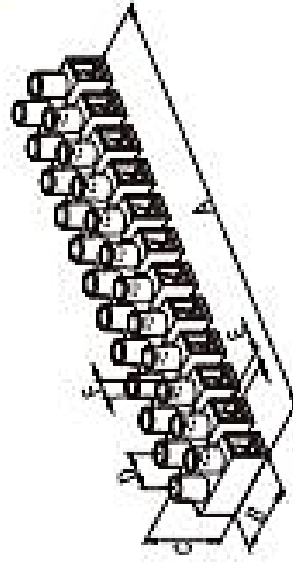

Cat. No.	Dimensions (mm/inches)						Screw
	Unit	A	B	C	D	DE	df
PA8HDS	mm	96.30	17.50	14.30	8.20	2.80	2.90
	in.	3.787	0.689	0.563	0.323	0.110	0.114
PA10HDS	mm	117.2	20.00	16.40	10.00	3.40	3.60
	in.	4.614	0.787	0.646	0.394	0.134	0.142
PA12HDS	mm	142.7	23.80	19.50	12.00	4.20	3.90
	in.	5.599	0.937	0.768	0.472	0.165	0.154
PA14HDS	mm	158.0	25.60	21.00	13.00	5.00	4.90
	in.	6.220	1.008	0.826	0.512	0.197	0.173

Cat. No.	Mkt. Protection	Color	No. of Poles	Electrical Ratings & Wire Range	Approvals	Packing
PA8HDS	With	Nature	12	17.5A, 450V, T110°C/T140°C 0.75-1.5 mm², Rigid/Flexible 20A, 300V, 105°C (221°F) 22-12 AWG, Self/Stn Cu	CE, UL, TUV, VDE, IEC, RoHS, REACH	Bag of 50 Carton of 500
PA10HDS	With	Nature	12	24A, 450V, T110°C/T140°C 1-2.5 mm², Rigid/Flexible 30A, 300V, 105°C (221°F) 22-10 AWG, Self Cu 22-12 AWG, Self/Stn Cu	CE, UL, TUV, VDE, IEC, RoHS, REACH	Bag of 50 Carton of 500
PA12HDS	With	Nature	12	41A, 500V, T110°C/T140°C 2.5-6 mm², Rigid/Flexible 35A, 300V, 105°C (221°F) 22-10 AWG, Self/Stn Cu	CE, UL, TUV, VDE, IEC, RoHS, REACH	Bag of 40 Carton of 400
PA14HDS	With	Nature	12	57A, 500V, T110°C/T140°C 4-10 mm², Rigid/Flexible 50A, 300V, 105°C (221°F) 20-8 AWG, Self/Stn Cu	CE, UL, TUV, VDE, IEC, RoHS, REACH	Bag of 25 Carton of 250