



深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co.,Limited

Add: No.2505 Songbai Road,Shiyan Town ,Baoan District, Shenzhen, China

Web:www.xgclcd.com

LED Module

pixel pitch	1.875mm
module size	240*240mm
module resolution	128*128
LED	SMD1515
Scan	1/32scan
Application	indoor
Weight	0.2KG
Chips	Epistar

LED Cabinet



Cabinet Size	480mm (W) 480mm (H)
Cabinet resolution	256*256dots
module quantity	2*2pcs
LED driver	Youyi /G-energy
Material	Die casting aluminum
Receiving card	1pcs
Power flight socket	1 Set
Signal flight socket	1 Set

LED Screen



Pixel density	284444dots/m ²	Continuous Working Hours	>72 hours
Ave power consumption	200W/m ²	Using Life	100,000 hours
Max power consumption	700W/m ²	MTBF	>10,000H
Optimum Viewing Distance(m)	≥2m	Scatter OOC Point	<0.01%
Brightness(cd/m ²)	≥1200cd	Continuous OOC Point	None
Refresh Rate	1920 frame/s	IP Grade	IP45/IP30
LED Drive mode	Constant Current	Working Temperature	-35C----+60C
Viewing angle	W140 H140°		
Display color	17M——69G	Working Humidity	10---70%



深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co., Limited

Standard Accessories



Main power cable



Main signal cable




Interconnect power cable



Interconnect signal cable

Connection diagram:

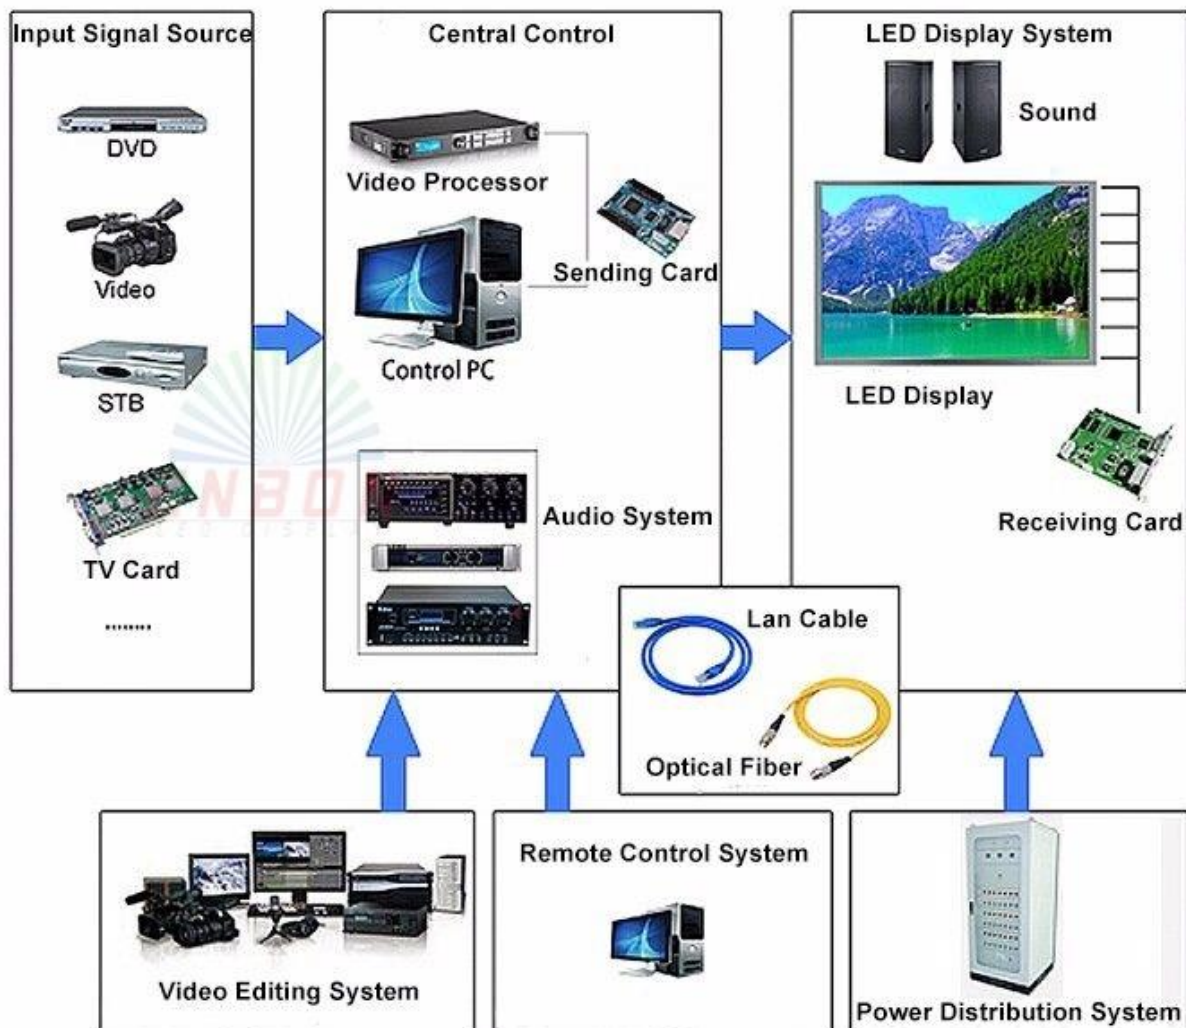



深圳市星光彩科技有限公司 Shenzhen Xing Guang Cai Technology Co., Limited

4.Regular packing:



5.Certifications: CE ROS FCC CCC

