

Integrated Cabling System



Server standing cabinet WB-SAxxxx97B -Heavy duty type, Popular used for data center

- ◆ Front **arc perforated door**
- ◆ Back split meshed doors with handle lock
- ◆ Removable solid metal double side panels, lock is optional
- ◆ Enhanced 130 degrees operation angle hinge
- ◆ Top&Bottom wire path, hole size can be customized
- ◆ Top can be fixed with 4 fans for cooling.
- ◆ With heavy duty swiveling wheels&adjustable feet
- ◆ RU marked 2.0 mm mounting rails, thickness for body 1.2mm
- ◆ Chimney 25x30x675mm for option
- ◆ Disassemble or assemble packing
- ◆ Easily to assemble by air tool
- ◆ Max Static Bearing capacity: 1300 KG
- ◆ Sizes: 37U, 42U, 47U, width 600mm, 800mm, depth 670mm 870mm, 1070mm, 1270mm
- ◆ Protection: IP20
- Complies with ANSI/EIA RS-310-D, IEC297-2, DIN41491; PART1, DIN41494; PART7, ETSI
- Surface Finish: Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity powder coating
- Color:

RAL9005	RAL7035	RAL9004
---------	---------	---------

Accessories included:

IEC PDU with 20-C13 & 4-C19, 2P MCB 2m 6mm² power cord + 32A command plug, dimensions 1067*45*45mm

Chimney



Integrated Cabling System



spcc cold rolled steel 1.0mm thickness,height adjustable

Application

- Telecommunication equipment
- CCTV
- Security and broadcasting
- Active equipment
- DATA CENTER

Integrated Cabling System



SAMPLE gallery : 800*1200 mm 42U

When front side opening

Solid metal back door



front meshed door



back split perforated doors



Double section side panels



Removable side panels

Integrated Cabling System




Item NO.	Item	600 wide	800wide	Materials	Treatment	Note
1	Frame	2	2	1.2mm SPCC steel	Powder coating	
2	Front Door	1	1	1.2mm SPCC steel	\	metal border
3	Side Door	2	2	1.2mm SPCC steel	Powder coating	Removable
4	Back Door	2	2	1.2mm SPCC steel	Powder coating	
5	Lock	2	2	\	\	Handle Lock
6	Top cover	1	1	1.2mm SPCC steel	Powder coating	
7	Rear door panel	1	1	1.2mm SPCC steel	Powder coating	
8	Fan unit	1	1	1.2mm SPCC steel	Powder coating	
9	Ac fan	2 or 4	2 or 4	\	\	D>800,4 pcs
10	Bottom panel	1	1	SPCC T=1.2	Powder coating	Optional parts
11	Earthing cable	1	1	Y/G cable	\	25 cm
12	Castors tray	4	4	SPCC T=2.0	Powder coating	
13	Castors	4	4	\	\	
14	Ajustable feet	4	4	Steel	Brass plated	M12
15	Mounting angle	2	2	SPCC T=1.2	Powder coating	
16	19inch rails	4	4	SPCC T=2.0	Powder coating	
17	Vertical C/M	\	2	SPCC T=1.2	Powder coating	Only for 800 W

Integrated Cabling System



Explored view

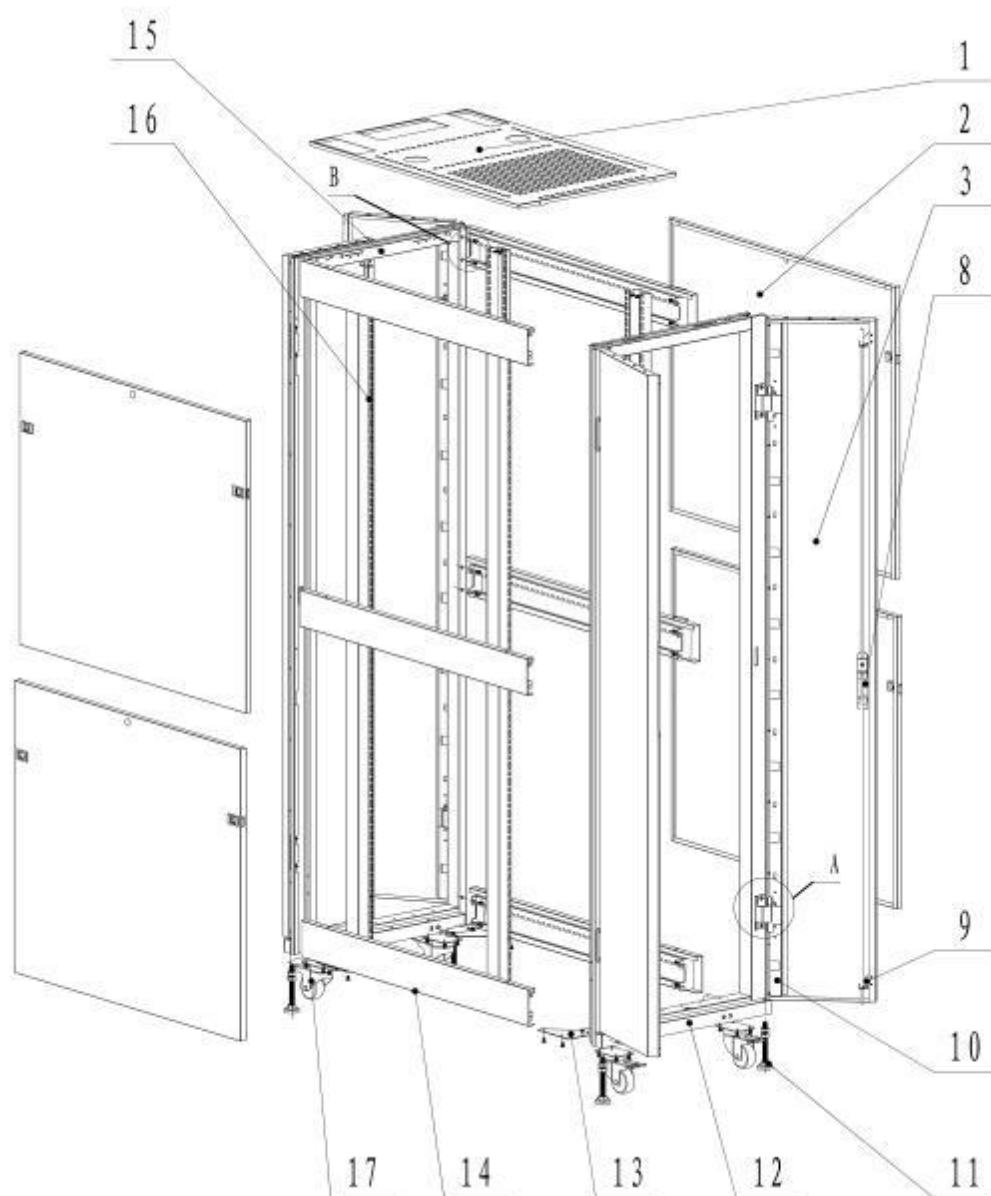


Integrated Cabling System



DISASSEMBLE PACKAGE

Package A (Doors)

Front&Rear doors, side panels;

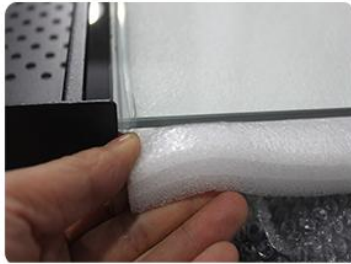

Package B (Frame)

Frame×2



Package C (Top&Bottom panel)

Top&Bottom panel, Screws&cage nuts, Locks,Castors&feet,Fan tray



Remarks: Vertical cable managers(If have) will be packed serpatedly