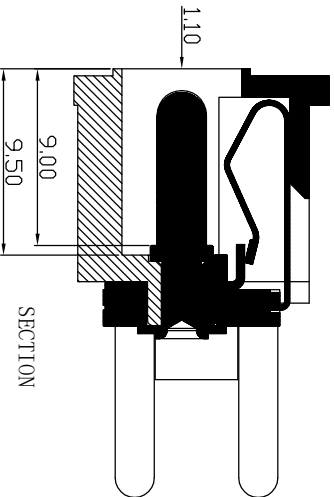
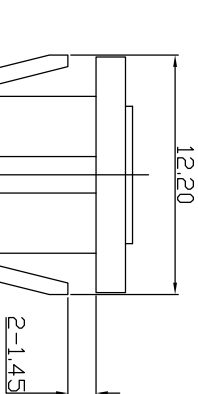


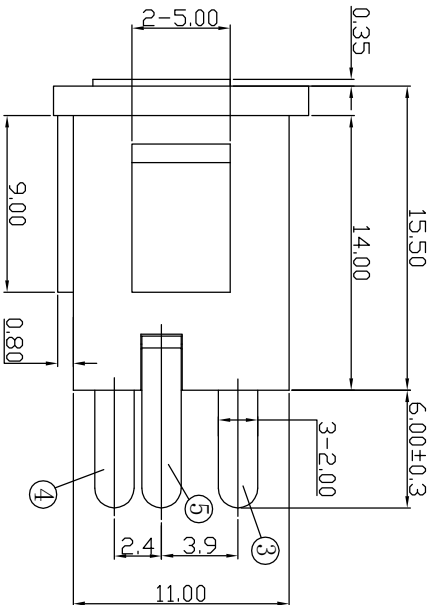
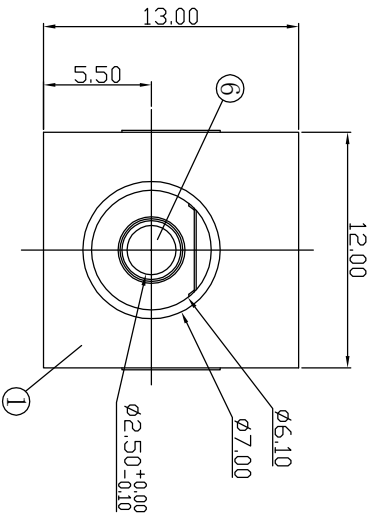


P.C.B LAYOUT
TOP VIEW

- SPECIFICATION
- 1.Operating temperature: -25~85°C
 - 2.Rating : DC 24V 2.5A
 - 3.Contact resistance: ≤0.03Ω
 - 4.Insulation resistance: ≥100MΩ (DC500V);
 - 5.Withstand voltage: 500VAC ;
 - 6.Insertion and extraction force: 3-30N;
 - 7.life test: 5,000 cycles;
 - 8.wave soldering: dipped in solder pot 260±5°C for 3±0.5 seconds.

										SHUNGLONG ELECTRONIC CO., LTD																																							
										General					Angle					CUSTOMER COPY					TITLE: DC POWER JACK																								
										X ± 0.50					X ± 3°																																		
										XX ± 0.30					XX ± 2°																																		
										XXX ± 0.20					XXX ± 1°																																		
ECN(DCN) NO.										REV					DATE					DESCRIPTION					CHANGE					APPRO.					PART NO.					DJ-D073									
										0					23/10/31					NEW					JASON					Max.hu																			
																									DESIGN					JASON					23/10/31														
																														CHECK					JASON					23/10/31									
																														APPRO.					Max.hu					23/10/31									