



Category

- SWITCH
- MICRO/DETECTOR SW

- ROCKER SW

- PUSH SW

- TOGGLE SW

- ANTI-VANDAL SW

- CAPACITANCE SW

- SLIDE SW

- PRESSURE SW

- ROTARY SW

- DIP SW

- TACT SW

- LIGHTED TACT SW

- KEYLOCK SW

- SAFETY & CONTROL SW

- VEHICLE SW
- SOCKET
- WIRE HARNESS
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- INDICATOR
- CONNECTOR
- WATERPROOF CONNECTOR
- WATERPROOF PARTS
- NEW PRODUCT

Products Search

Search



OUR PRODUCT

SWITCH / MICRO/DETECTOR SW

S-13 SERIES
General-Purpose Micro Switches SPDT, with Phenolic Housing for High Temp Application, 15A 125/250VAC

SPDT, SPST NO, SPST NC, General Purpose Micro Switches for Industrial Applications
Different Lever or Roller Actuator Available
Consult the Factory for Optional High Temp Applications up to 200°C

PDF Download

Get Information

Print this page




Feature

SPECIFICATIONS		FEATURES	
15A 125/250VAC (UL,CUL,CCC,CE) 3/4HP 125VAC, 1-1/2HP 250VAC (UL,CUL,CCC,CE) - Temperature rating: 105°C standard (150°C & 200°C optional) - Flammability rating: UL94V-0 - Case: Phenolic - Actuating Button: Thermoplastic Nylon - Terminals: Brass - Moving Blade: Brass - Spring: Stainless Steel - Auxiliary Actuators: Cold-Rolled Steel (Nickel-Plated) - Roller: Sintered Stainless Steel - Contacts: Silver-Cadmium Oxide		- Safety approved internationally by UL,CUL,CCC,CE - HP rating up to 1-1/2HP 250VAC - Choice of actuator styles - Solder, quick-connect and optional screw terminal 3 contact arrangements - Long-life coil spring mechanism - High-temperature up to 150°C & 200°C - SPDT, SPST NO, SPST NC is available upon request	


Item

S-13E




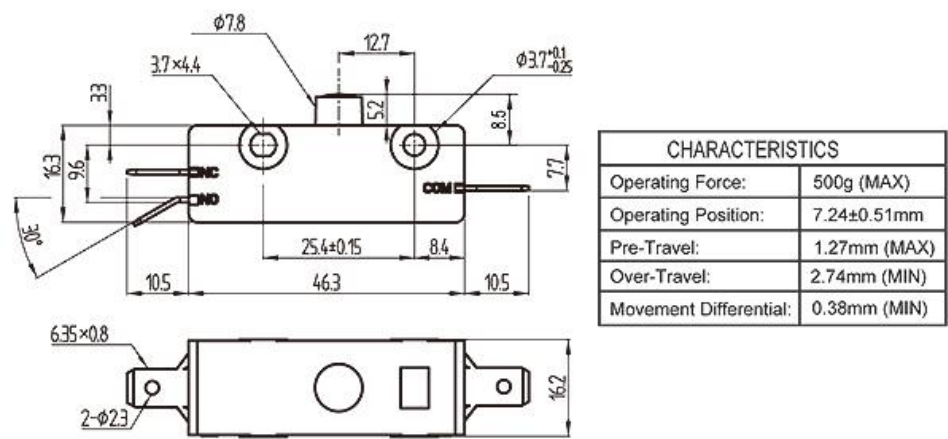


S-13H2

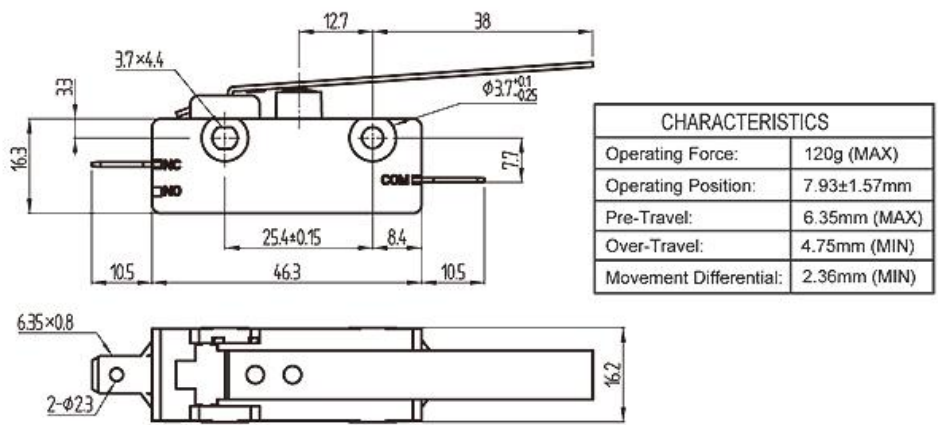

S-13K1

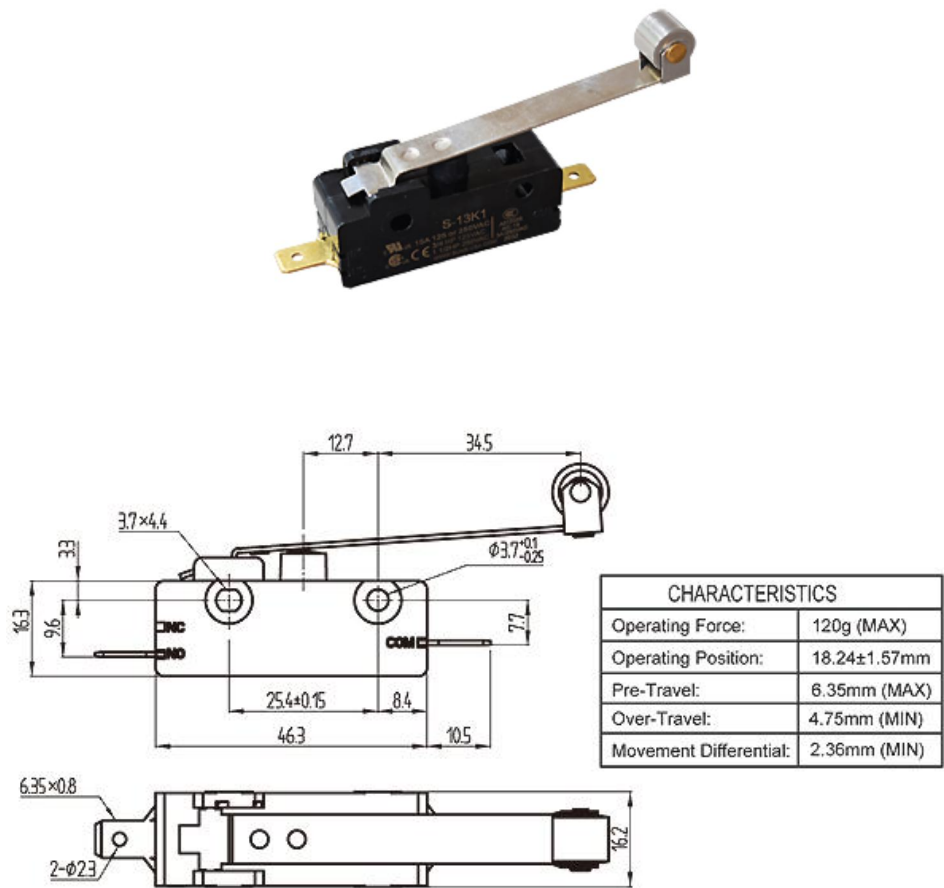

S-13M

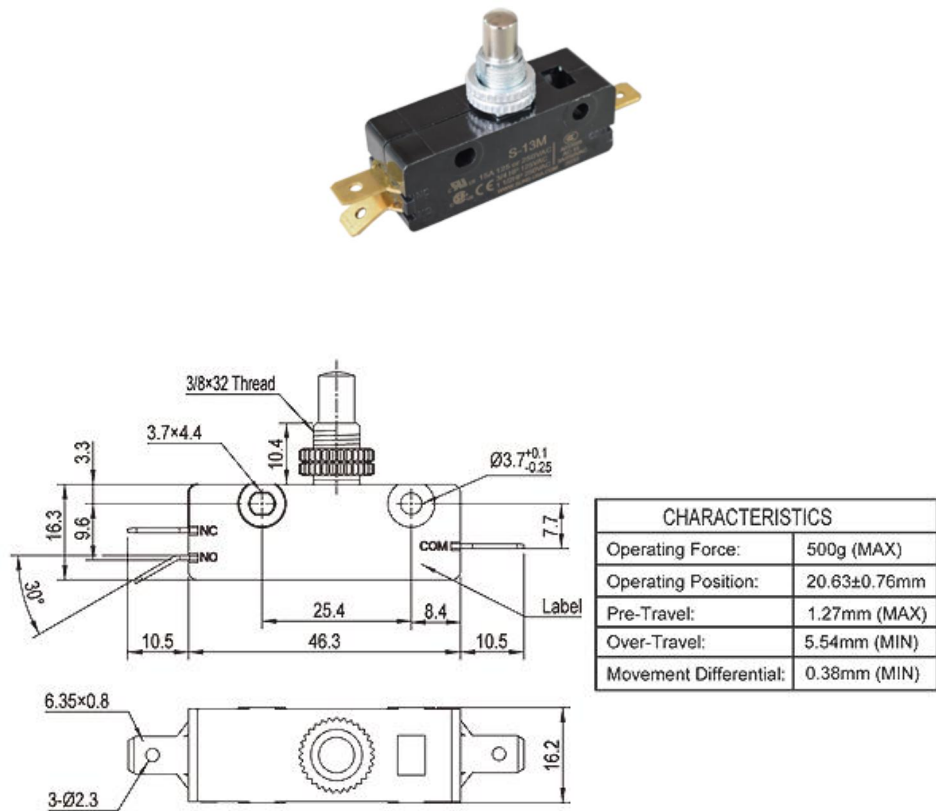



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved