
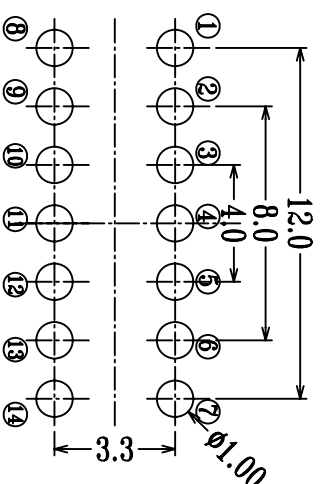
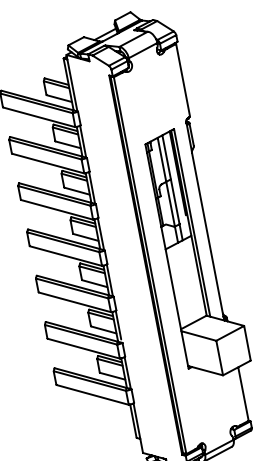
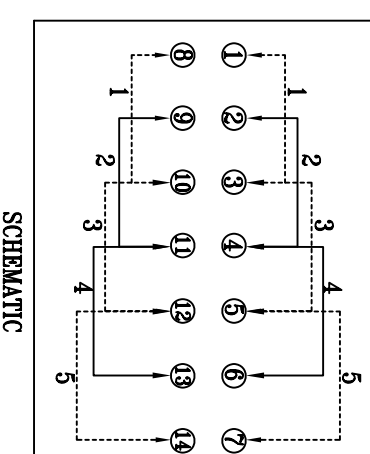


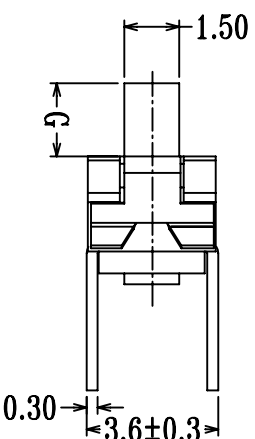

1. Rating: DC 6V 0.3A
2. Travel: 2 mm
3. Function: 2P5T
4. Contact Resistance: $\leq 70\text{m}\Omega_{\text{MAX}}$
5. Operating Force: $250\pm 80\text{gf}$
6. Life test: 10,000 cycles

KNOB G= 2.0, 3.0, 4.0 5.0mm

					TOLERANCE												
					UNLESS SPECIFIED												
					UP TO 5mm: ±0.1	ANGULAR											
					ABOVE 5mm: ±0.2	±1°		NO	DATE	REVISIONS		BY	APPD				
4	MK22D10A		Phosphor copper	2	NATURAL	TITLE:MINI SLIDE SWITCH			UNIT : MM	ROHS	DWN						
3	MS25D20 KNOB	P446	BLACK	1		MODEL:MS-25D18			SCALE: 6:1	COMPLIANT	CHK'D						
2	MS25D20 COVER	SUS301	WASHING	1										APPD			
1	MS25D18 CASE	LCP / BRASS	BLACK/Au/Ag PLATED	1										PRO.AGL:			REV :A0
NO.	PART	NAME	MATERIAL	QTY	FINISHING												
 皓宇 东莞市弘皓电子有限公司 HAOYU DONGGUANG HAORYU ELECTRONICS CO., LTD																	