

HOW TO ORDER
SIC-D03-xx-LF

LEADFREE

NO. OF POSITION


03: 0.3", 06: 0.6"
ROW TO ROW SPACE

RoHS Compliant


CIRCUITS	DIM.A	DIM.B	DIM.C	SPACE
6	7.62	7.62	10.16	03
8	10.16	7.62	10.16	
14	17.78	7.62	10.16	
16	20.32	7.62	10.16	
18	22.86	7.62	10.16	
20	25.40	7.62	10.16	
22	27.94	7.62	10.16	
24	30.48	7.62	10.16	
28	35.56	7.62	10.16	06
24	30.48	15.24	17.78	
28	35.56	15.24	17.78	
32	40.64	15.24	17.78	
40	50.80	15.24	17.78	
42	53.34	15.24	17.78	
48	60.96	15.24	17.78	

MATERIAL & FINISH

- * Contact: Beryllium Copper (BeCu) G=Gold Plated
- * Sleeve: Brass
- Plating: T=Tin Plated
- * Insulator: IC Socket=PBT (UL94V-0)
- * Insertion Standard Force: 300g max.
- * Extraction Standard Test: 60g min.
- * PBT Heat resisting durability: Max. 160~180°C, 5 Sec.
- * Current Rating: 1A
- * Operating Humidity Range: Annual mean 75%
- * Contact Resistance : 10 Milliohm
- * Insulator Resistance : 5000 Mege Ohm at 500 VDC
- * Dielectric Strength : 1000 VRMS Min
- * Rated Voltage : 100 VRMS / 150VDC
- * Temperature: - 55°C TO + 125°C

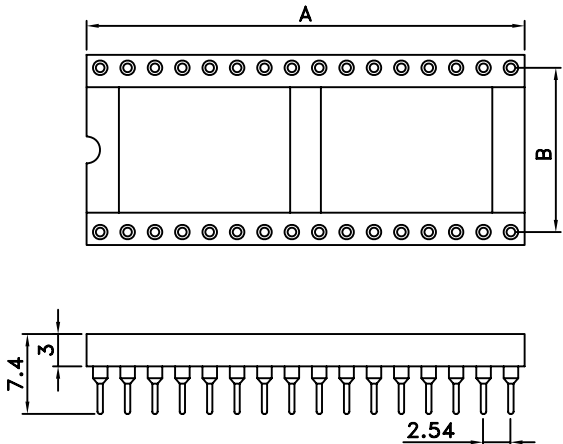

SIC-D06-xx-LF

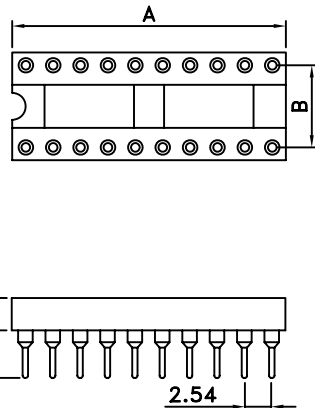

SIC-D03-xx-LF



煜倫股份有限公司

PART NO. SIC-Dxx-xx									
DWG NO. SIC-Dxx-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.15 .XXX AWG	DESCRIP TION:	SCREW MACHINE PIN IC SOCKET				
		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		