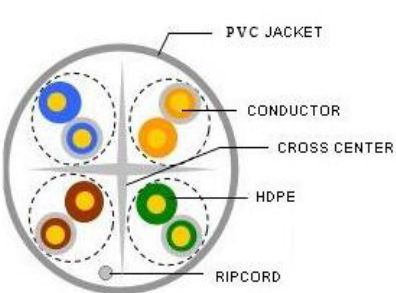


PRODUCT & SPEC.		23AWG CAT6 UTP	CONFIGURATION  A:orange/orange&wh B. blue/blue&white C.Brown/Brown&whit D.green/green&white
INDESIDE		4P	
CONDUCTOR	Configuration	4X2X0.57mm±0.02	
	Material	100% BARE COPPER	
	Work datapss	140~160M	
	Pass fluke test	No	
INSULATION	Material	HDPE	
	PE OD	Φ0.94±0.05mm	
PAIRED PITCH	blue/blue&white	12mm	
	Orange /Orange &white	16mm	
	green/green&white	14mm	
	Brown/Brown&white	18mm	
		/	
	PACKAGE	305M/BOX	
	GRROUND	/	
CROSS CENTER	PE	/	Inside cable sequence: blue/blue&white、Orange /Orange &white、green/green&white、Brown/Brown&white.
SKIN	Material	PVC	
	color	OEM	
	PVC OD	5.8mm±0.2MM	
	PVC Thickness	0.54±0.03mm	
	SERFACE	SMOOTH	
PERFORMANCE	conductor resistanceΩ /100m.20℃	≤9.1Ω	
	Conductor allow load current(A)	0.5A	
	voltage rating(V)	≤30V	
	operating temperature(℃)	≤75℃	
PRINTING	As custome's requirement		