

ROHS COMPLIANT

Ordering Information

HMNSR25 - XX XX A001 X X X

- No.Of Pins Standard

Per Row

01~40
- Pin Length

001=6.0/3.0/1.5

01=Gold Flash 002=5.84/2.8/1.5

02=Gold 3U" XXX=SelectA/B/R

11=Plating Tin

XX=Select Plating
- Insulation

Material

P=PBt

T=NL6T

L=LCP
- Contact

Material

B=Brass




P=Phone

TR=Tape Reel

Bronze
- Packing

B=Box

D=Tube

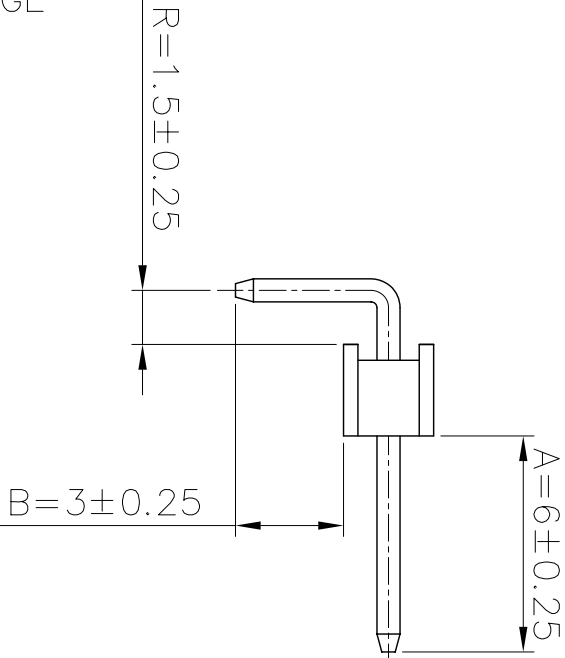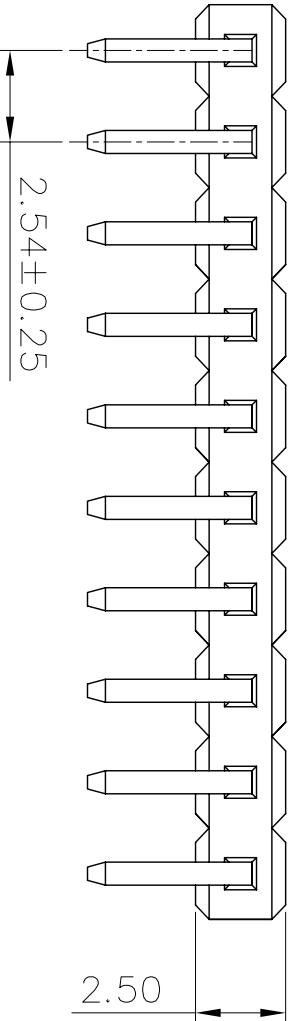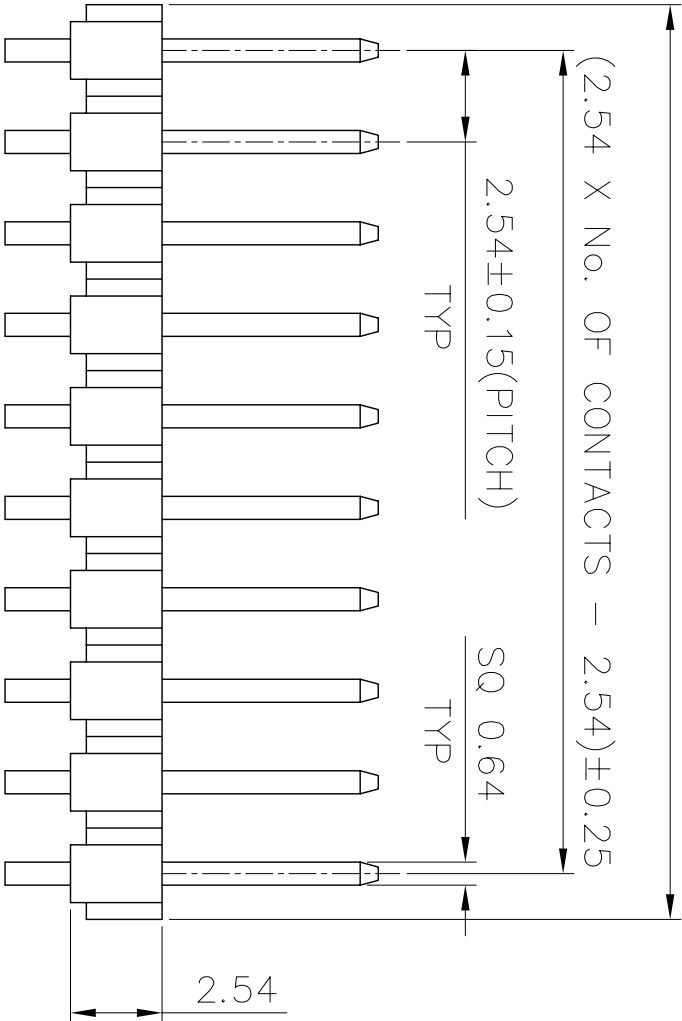


Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT

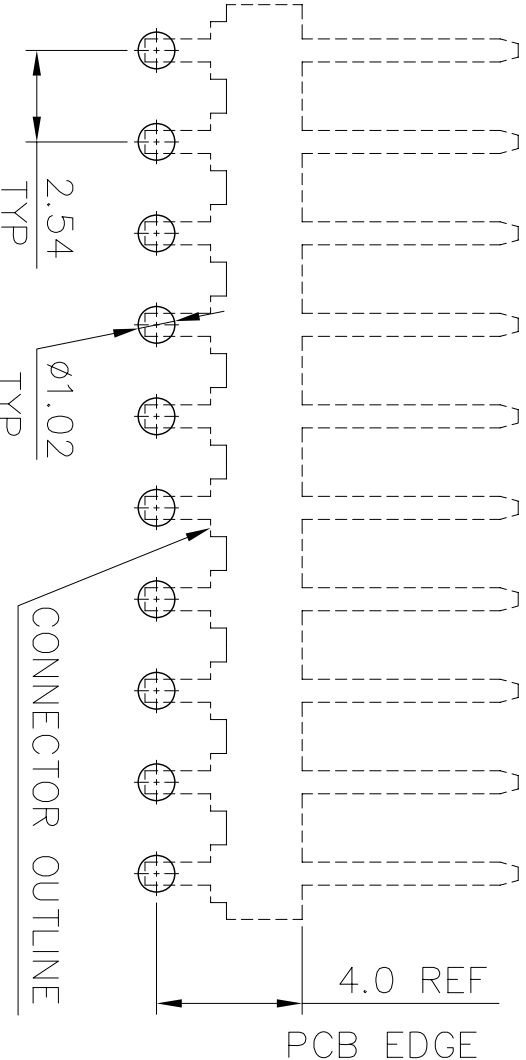

TOLERANCE: ±0.05, THICKNESS: 1.6mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

Dimension Anntitheses List			
Item	A	B	R
Standard	6.0	3.0	1.5
Select			

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	ELEETE TECHNOLOGY CO., LTD 億洩得股份有限公司			
X.	±	X'.	±5'	CHECK	DATE	FILE NAME	2.54MM PIN HEADER SINGLE ROW		
.XX	±0.38	.X'	±2'	Feng	2013.02.25	(品名)	R/A TYPE BASE 2.54H	PART NO	HMNSR25-XXXXXA001XXX
.XXX	±0.25	.XX'	±1'	UNIT: mm	SCALE 1:1	APPRO.	DATE	DRAWING NO	HMNSR25-A001
A4	☯	SHEET: 1 of 1						REV. A0	