
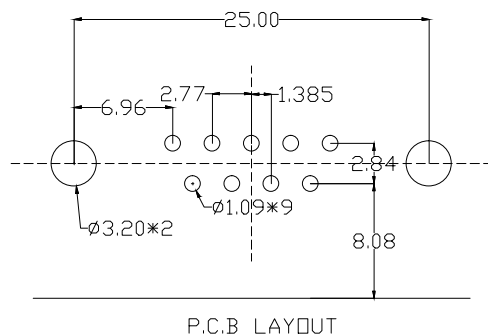
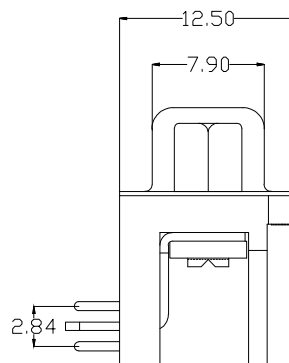
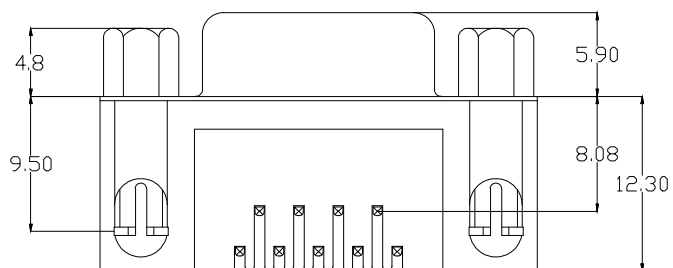


RoHS COMPLIANT

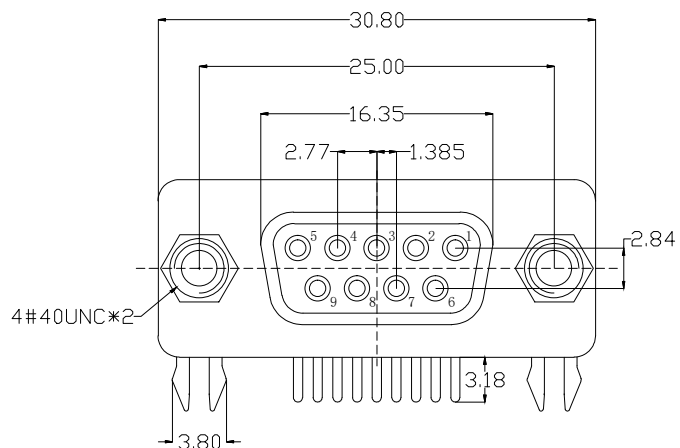

NOTES:

- 1.HOUSING MATERIAL: PBT UL94V_0 BLACK.
- 2.TERMINAL MATERIAL: COPPER ALLOY, HALF GOLD TIN,0.6~0.8U"AU.
- 3.PLASTIC SHELL: SPCC 24H.
- 4.HARPOON FEET: SPCC 12H,TIN PLATED.
- 5.RIVET:COPPER ALLOY,NICKEL PLATED. SIZE=5.4*5.1*1.2
- 6.SCREW:FERROALLOY,NICKEL PLATED. SIZE=4.8

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING CURRENT: 3.0A
 - 1-2. VOLTAGE RATING: 250V AC
 - 1-3. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE.
 - 1-5. INSULATION RESISTANCE: 3000MΩ MIN. AT 500V DC
2. AMBIENT TEMPERATURE RANGE:-45°C~+85°C.

M&T
High quality connectors

MTCONN ELECTRONICS CO.,LTD

DIM	TOL	DEC	TOL	DRWN: SAM 2011-08-23	PART NO.: MTDB40-90921B-15164
X.	±0.50	X.*	±2°	CHKD: ALAN 2011-08-23	TITLE:VGA FEMALE 9P 90°DIP H12.5 NUT4.8
X.X	±0.35	X.X*	±2°	APPD: WILLIAM 2011-08-23	DRAWING NO.: MTDB40-90921B-15164
X.XX	±0.20	X.XX*	±--	SHEET: 1/1	UNIT mm
X.XXX	±0.10	X.XXX*	±--		SCALE N/A
					SIZE A4
					REV A