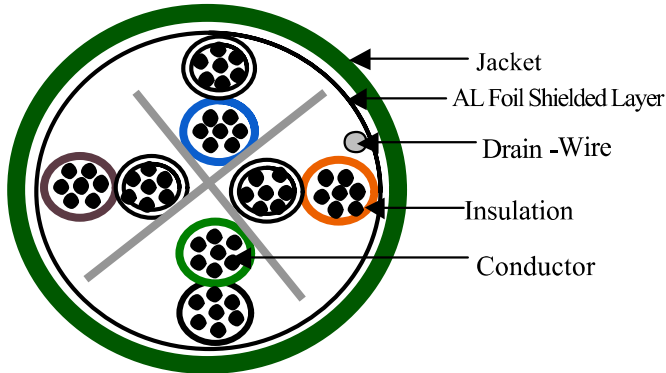


TM02FTP6BL01-PVC

SPECIFICATION		CAT.6 FTP 4P STRANDED 24AWG 250MHZ OD 6.6MM UL	CONSTRUCTION D.W.G
ITEM	SPECIFICATION		 Jacket AL Foil Shielded Layer Drain -Wire Insulation Conductor
CONDUCTOR	AWG	24AWG	
	MATERIAL	BARE COPPER	
	CONDUCTOR SIZE	7*0.20±0.005mm	
INSULATION	AVG THICKNESS	0.195mm	
	MIN THICKNESS	0.175mm	
	MATERIAL	HDPE	
	DIAMETER	0.98mm±0.05mm	
JACKET	AVG THICKNESS	0.74mm	
	MATERIAL	PVC	
	DIAMETER	6.60±0.20mm	
	COLOUR	Black/red/white/orange/gray/green/blue/yellow	
Shielding	AVG Thickness	0.02mm±0.005mm	COLOUR CODE:
	Material	AL Foil	
MARKING	PATCH CORD CAT.6 STRANDED STP 24AWG 4PAIRS ISO/IEC 11801 TIA/EIA -568B.2.2 UL LISTED		4PR: 1.BLUE * WHITE/BLUE 2.ORANGE* WHITE /ORANGE 3. GREEN* WHITE/GREEN 4. BROWN* WHITE/BROWN Length: 0.5m/1m/1.5m/2m/3m/5m/10m/15m/20m
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES	
1,Rating Temp:75℃ 2,D-C Resistance:9.4 ohm/100M at 20 degree C 3,Dielectric Srength:AC 0.75kv/m 4,Spark test:2kv/0.15sec 5,Nominal impedance(OHMS):100±15% 6,Pair-1P-Ground Capacitance Unbalance Max 330pf/100m 7, Propagation Delay Skew:45nS/100M		1,Tensile Strength test are before aging: Sheath:>1.41kg/mm Insulation>1.68kg/mm 2, Tensile Strength test are after aging: Sheath>85% Tensile Strength test are before aging Insulation>75% Tensile Strength test are before aging 3,Elongation after aging:Sheath:>50% Elongation before aging Insulation>75% Elongation before aging	

Office Add: Rm 2202, Zhan Tao Tech Building, Min Zhi Road 1083 , Bao An District,Shenzhen China


Tel: (+86) 755-29360200 (International) +86 755-29000903 (国内贸易)

Fax: (+86) 755-29360200 ext.602

E-mail: sales@telemax.cn

Http: //www.telemax.cn



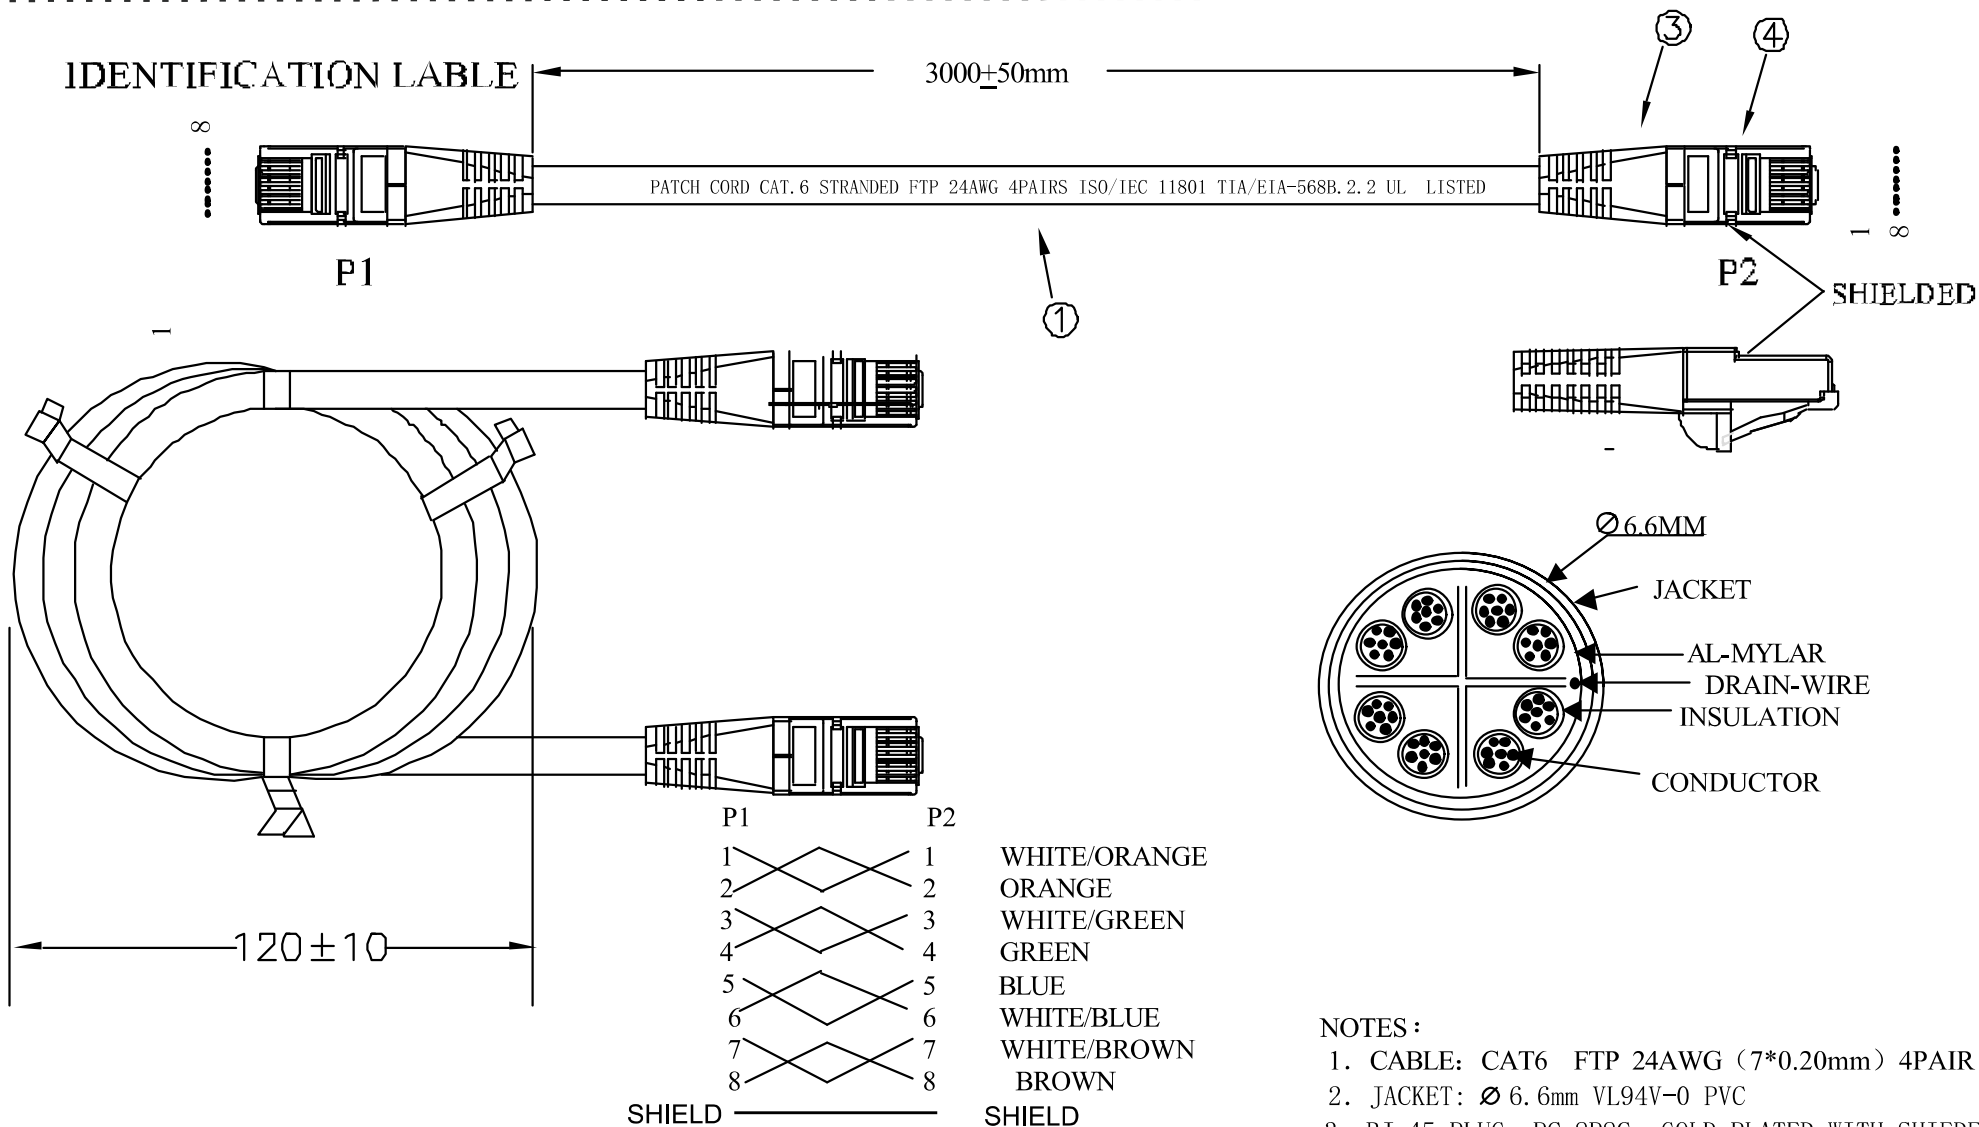

Office Add: Rm 2202, Zhan Tao Tech Building, Min Zhi Road 1083 , Bao An District, Shenzhen China

Tel: (+86) 755-29360200 (International) +86 755-29000903 (国内贸易)

Fax: (+86) 755-29360200 ext.602

E-mail: sales@telemax.cn

Http: //www.telemax.cn

