Report No.: **Test Time: 2021/10/18 10:18:37**

LUMINAIRE PHOTOMETRIC TEST REPORT

Luminaire Property

Manufacturer: 0
Luminaire Type: LHLSS710BN30
Lamp Type:
Luminous Width: 0 mm
Luminous Length: 0 mm
Luminous Height: 0 mm

Voltage(V): 219.60 V
Current(A): 0.0920 A
Power(W): 11.37 W
Power Factor: 0.5600
Lamp Luminous Flux: 805.34


Photometric Results

CIE Class: Direct
Luminaire Luminous Flux: 805.3372 lm
Downward Ratio: 100.00%
Luminaire Efficacy Rating(LER): 70.83 lm/W
Beam Angle(50%) C0-180,C90-270: 40.9,40.8
Field Angle(10%) C0-180,C90-270: 64.5,64.8
S/MH C0-180,C90-270: 0.689,0.689

Max. Intensity: 1365.12 cd
Max.Intensity Angle: C=270 Gamma=4
Upward Ratio: 0.00%
Efficacy: 100.00%
Center Intensity: 1340.51 cd
Effective Luminous Flux: 625.26 lm
ERP(φuse)(120deg): 722.92 lm

Picture of Luminaire

Luminous Intensity Distribution Curve

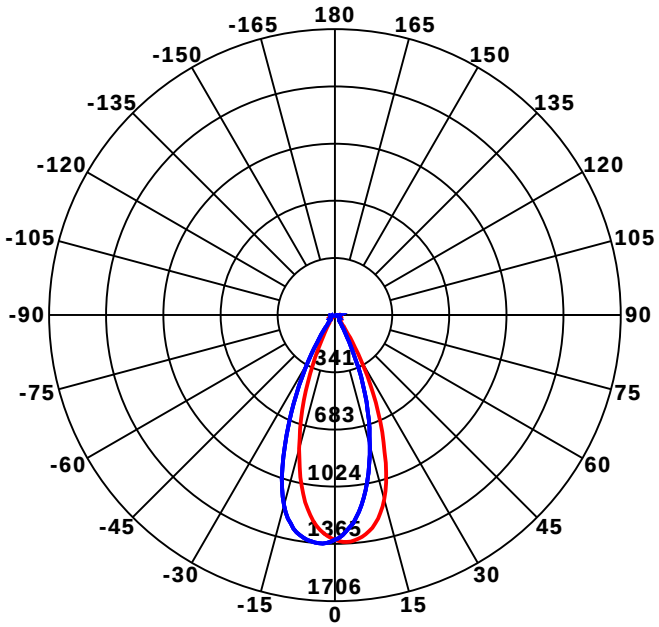

Beam Angle(50%) C0-180,C90-270: 40.9 deg,40.8 deg


C0-180 **C90-270**


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

Luminous Intensity Distribution Curve

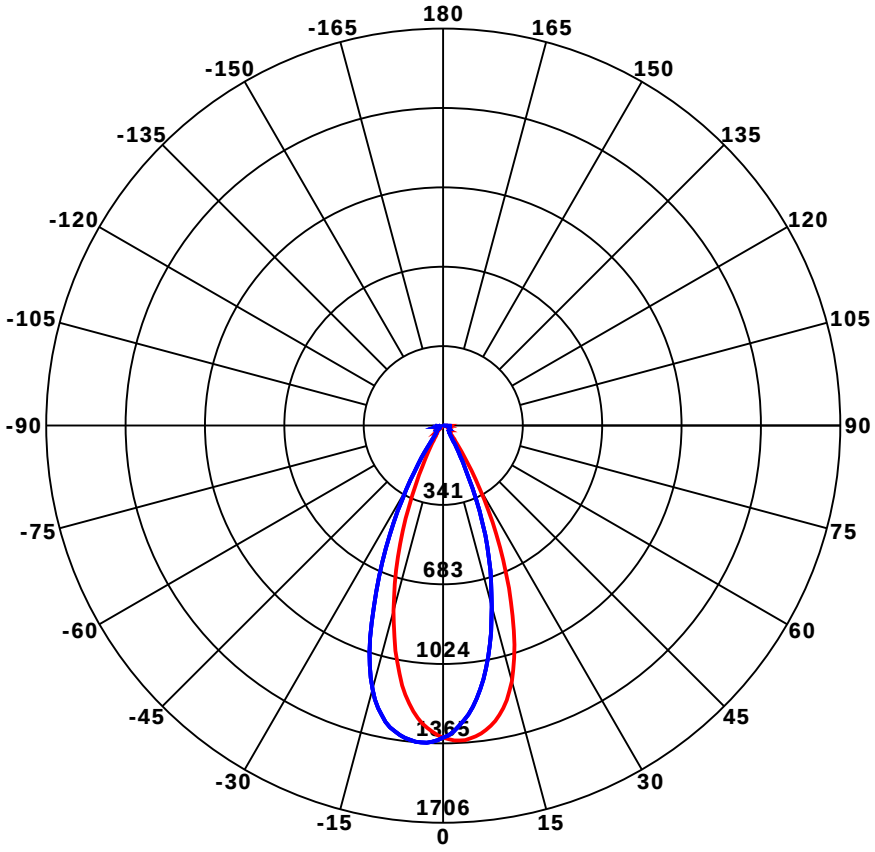

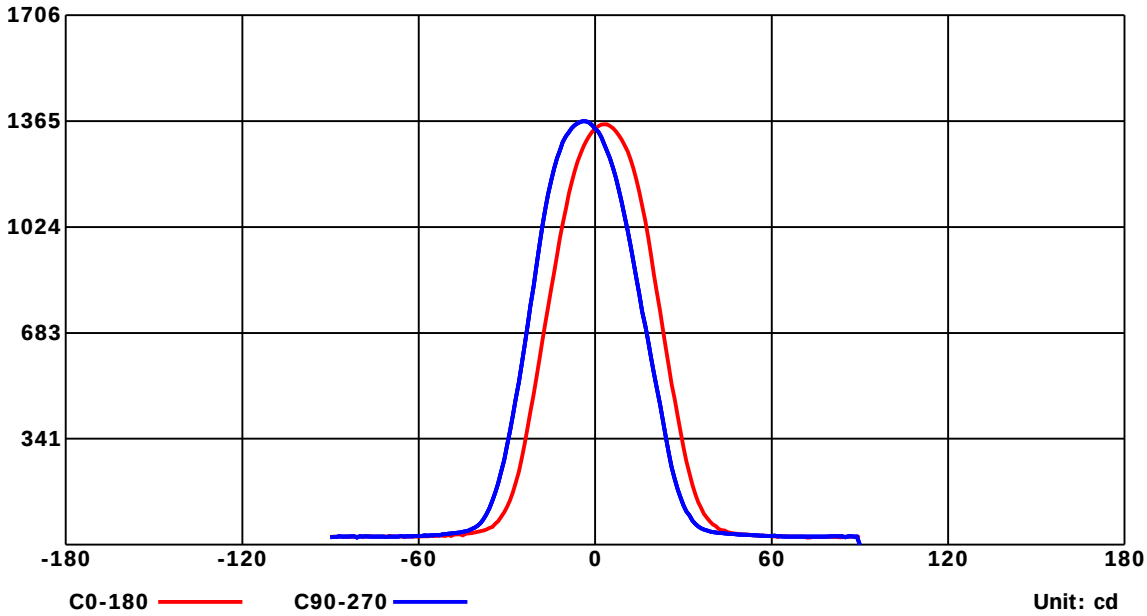


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

Luminous Intensity Distribution Curve

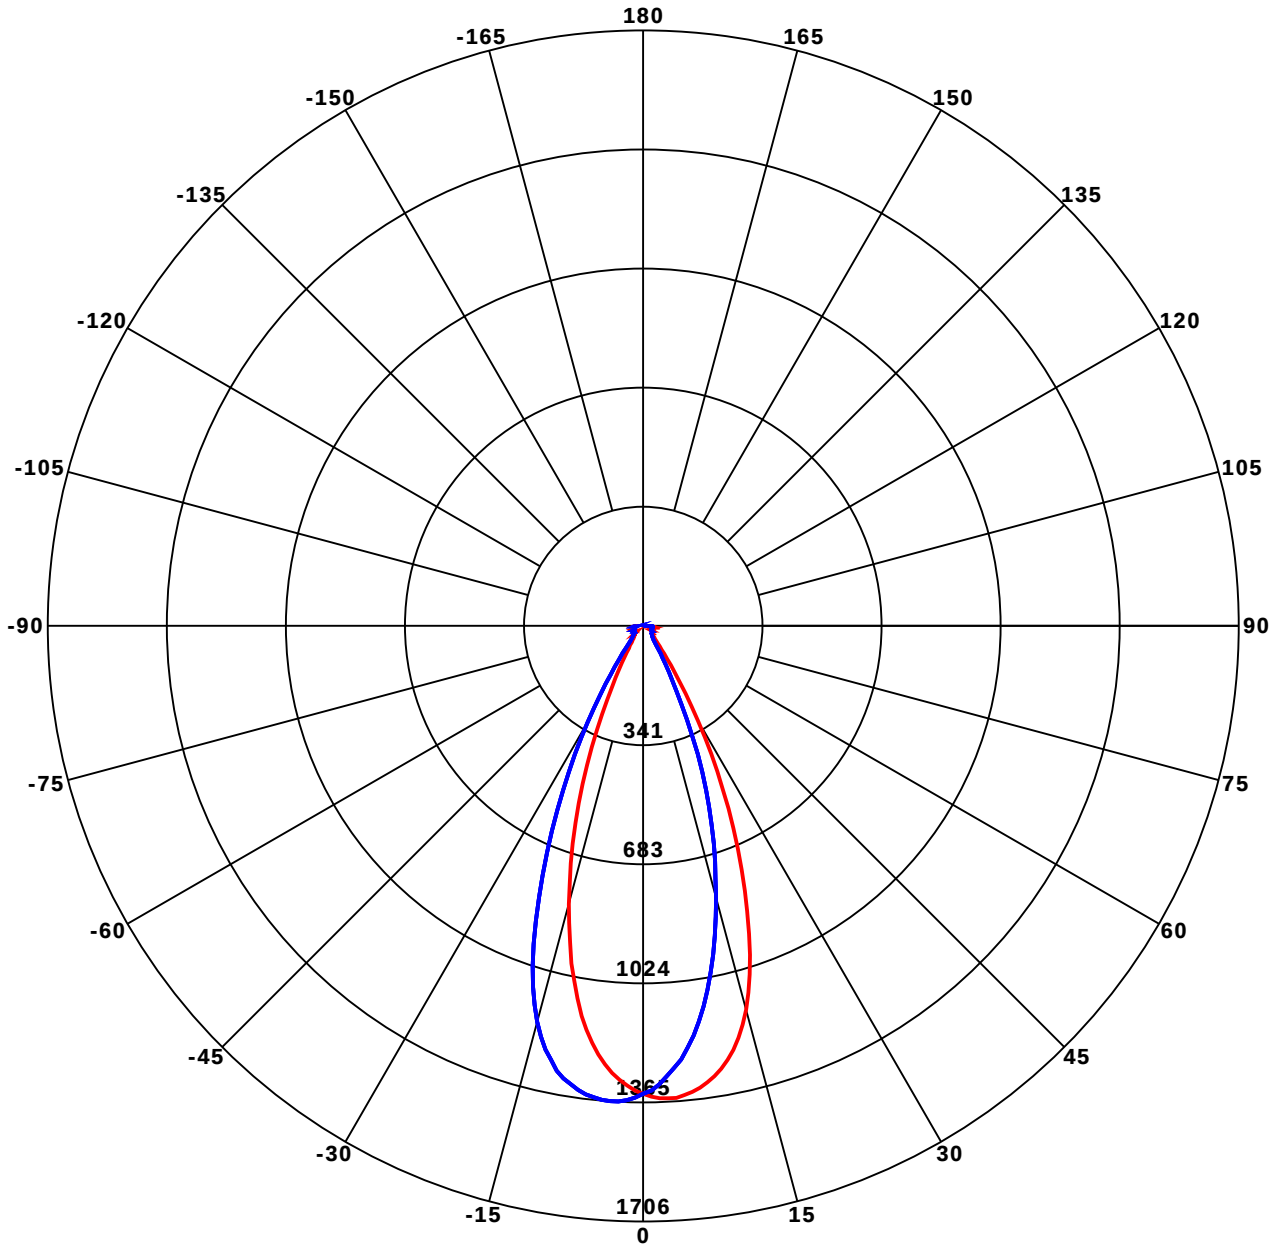

Unit: cd/klm

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37


G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFCIENTS OF UTILIZATION FOR RHOFC=20															
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.00	0.98	0.96	0.99	0.96	0.94	0.96	0.93	0.91	0.91	0.88	0.86	0.85	0.82	0.80	0.74
2	0.93	0.91	0.90	0.93	0.90	0.88	0.90	0.87	0.84	0.86	0.83	0.80	0.81	0.78	0.75	0.70
3	0.88	0.86	0.85	0.88	0.85	0.83	0.85	0.82	0.79	0.82	0.78	0.75	0.78	0.74	0.70	0.66
4	0.84	0.82	0.81	0.83	0.81	0.79	0.81	0.78	0.75	0.79	0.75	0.72	0.75	0.71	0.67	0.63
5	0.81	0.79	0.77	0.80	0.77	0.76	0.78	0.75	0.72	0.76	0.72	0.69	0.73	0.68	0.65	0.61
6	0.78	0.76	0.75	0.77	0.75	0.73	0.75	0.72	0.70	0.73	0.69	0.66	0.71	0.66	0.62	0.59
7	0.75	0.73	0.72	0.75	0.72	0.71	0.73	0.70	0.67	0.71	0.67	0.64	0.69	0.64	0.60	0.57
8	0.73	0.71	0.70	0.72	0.70	0.69	0.71	0.68	0.65	0.69	0.65	0.62	0.67	0.62	0.59	0.55
9	0.71	0.69	0.69	0.70	0.68	0.67	0.69	0.66	0.64	0.67	0.63	0.60	0.65	0.60	0.57	0.54
10	0.69	0.68	0.67	0.68	0.67	0.65	0.67	0.64	0.62	0.65	0.62	0.59	0.63	0.59	0.56	0.53

LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

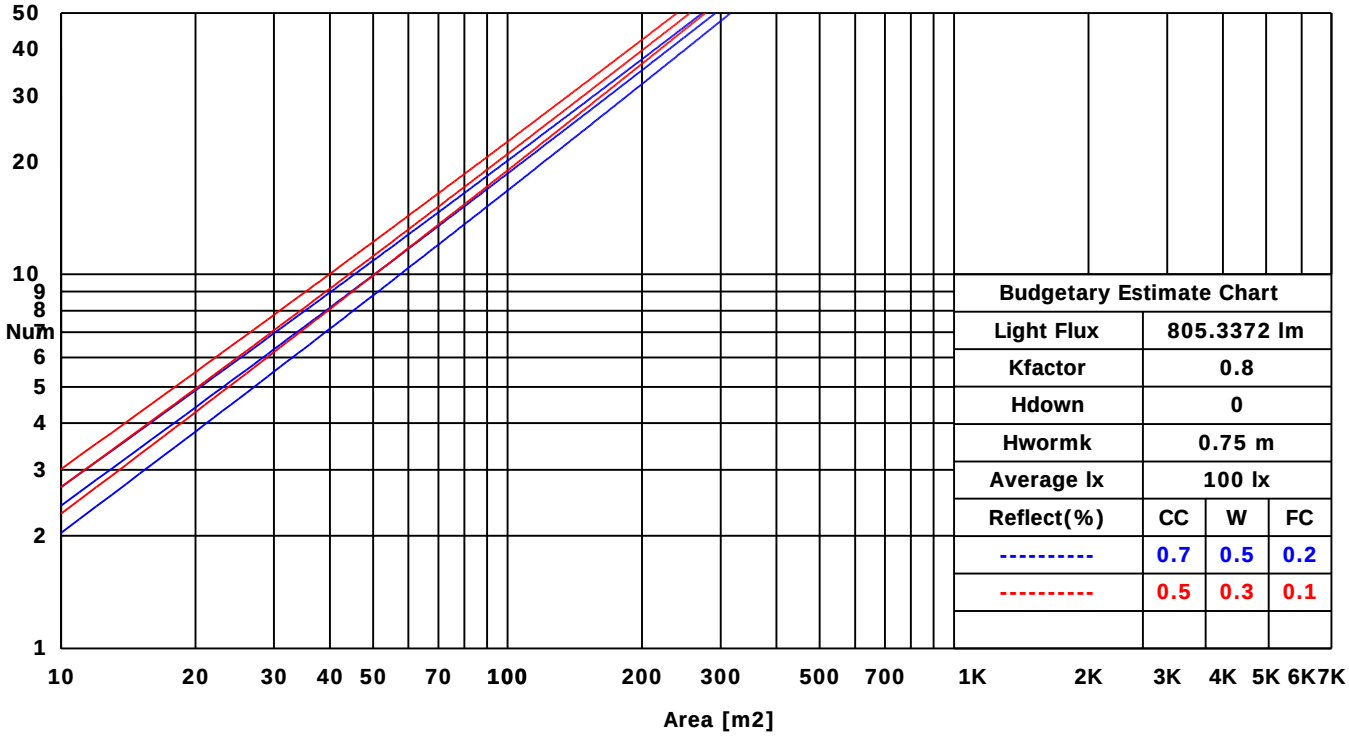


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

ISOCANDELA DIAGRAM (RECTANGULAR)

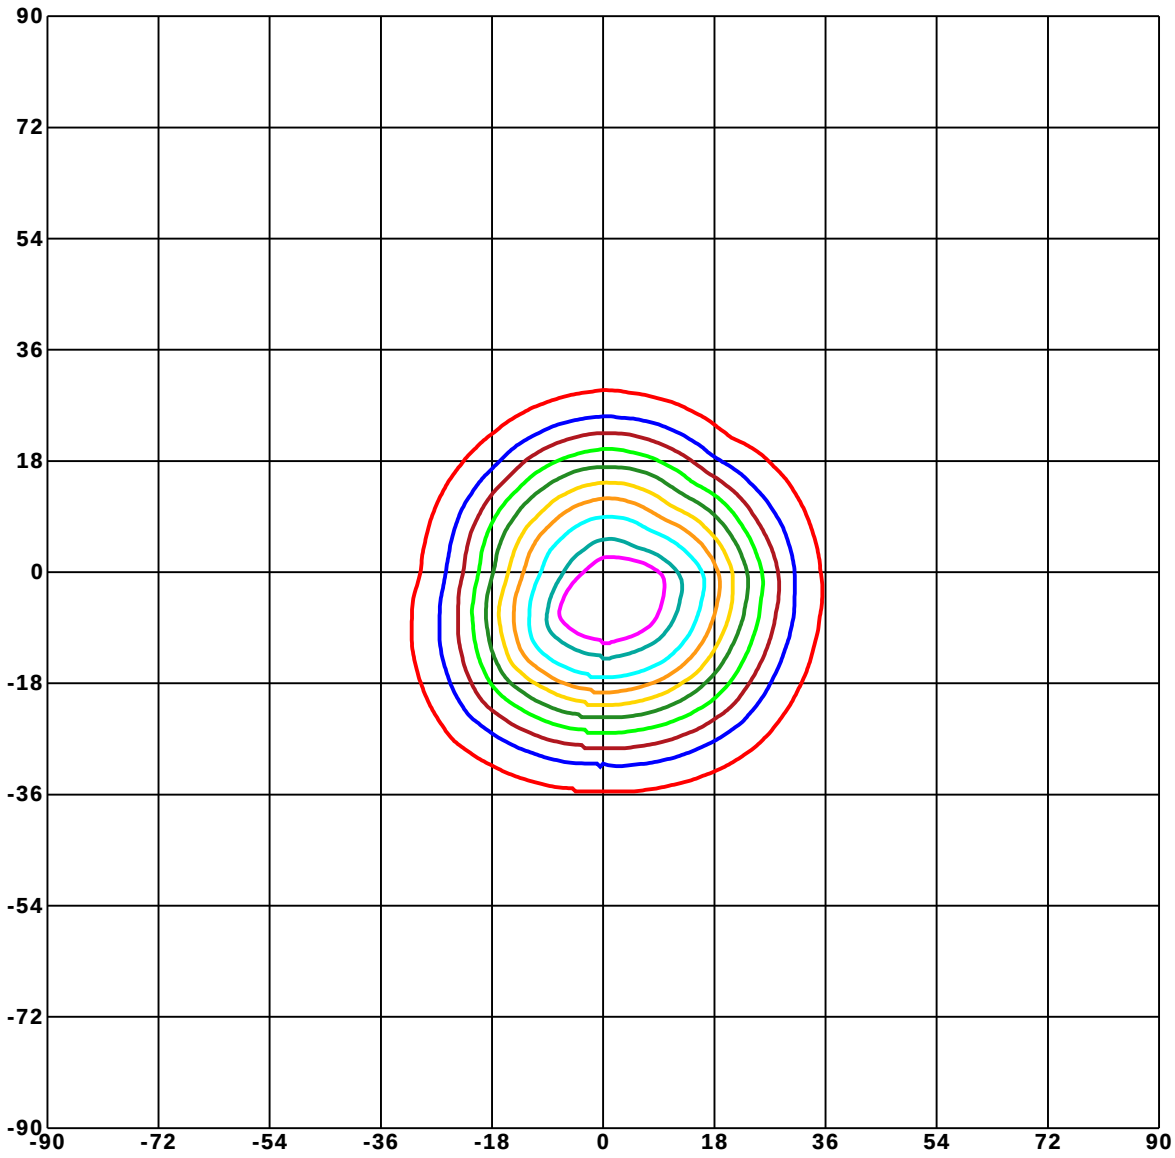

Unit of intensity:cd **Imax(100%): 1365.12 cd**


- 1296.864(95%Imax)
- 1228.608(90%Imax)
- 1092.096(80%Imax)
- 955.584(70%Imax)
- 819.072(60%Imax)
- 682.56(50%Imax)
- 546.048(40%Imax)
- 409.536(30%Imax)
- 273.024(20%Imax)
- 136.512(10%Imax)

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

ISOCANDELA DIAGRAM (SPHERE)

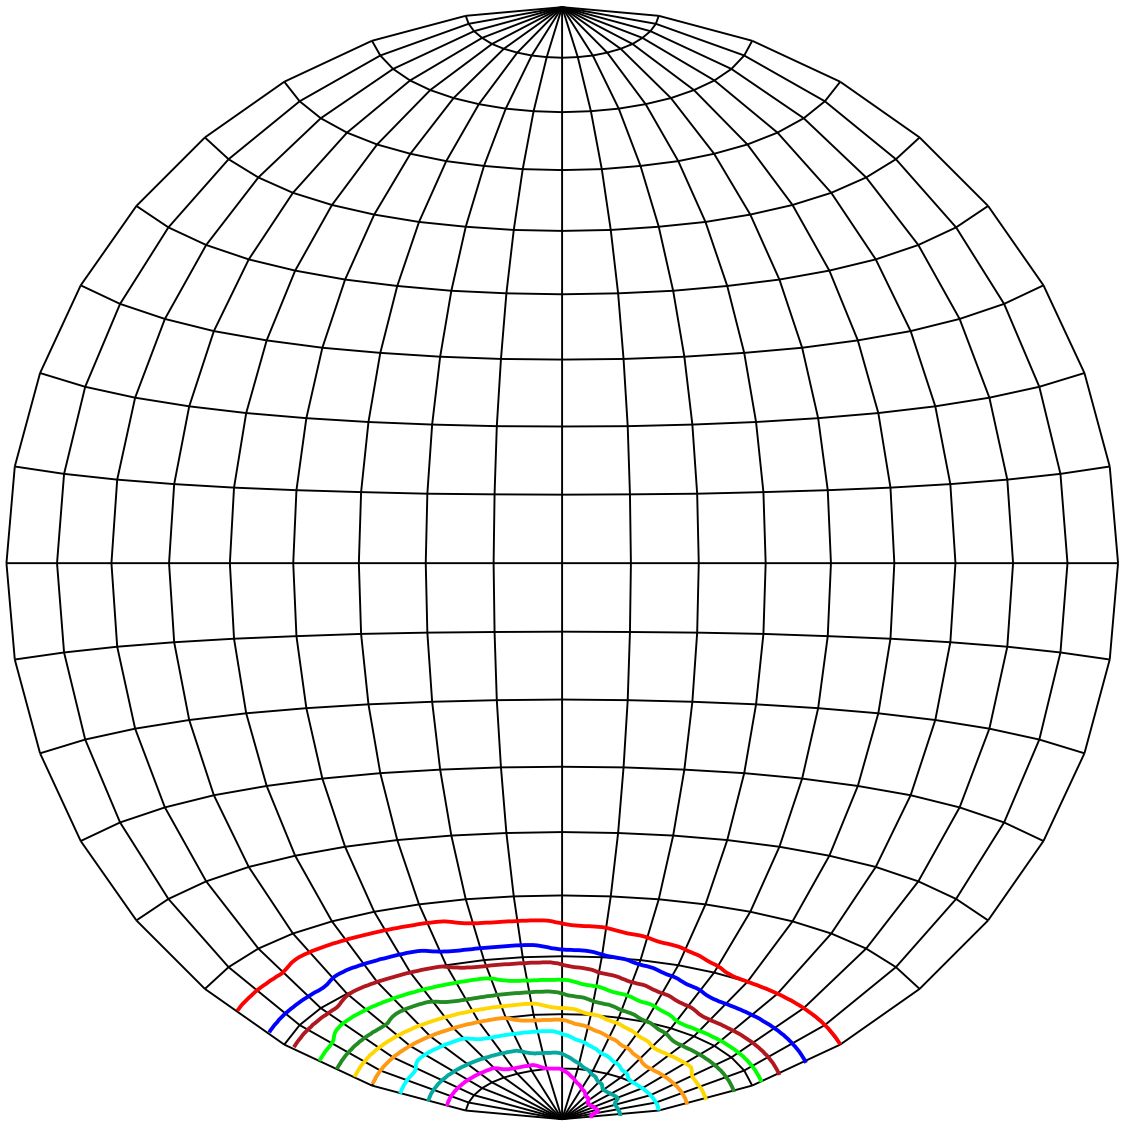

Unit of intensity:cd **Imax(100%): 1365.12 cd**


1296.864(95%Imax)	682.56(50%Imax)
1228.608(90%Imax)	546.048(40%Imax)
1092.096(80%Imax)	409.536(30%Imax)
955.584(70%Imax)	273.024(20%Imax)
819.072(60%Imax)	136.512(10%Imax)

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

ISOLX DIAGRAM

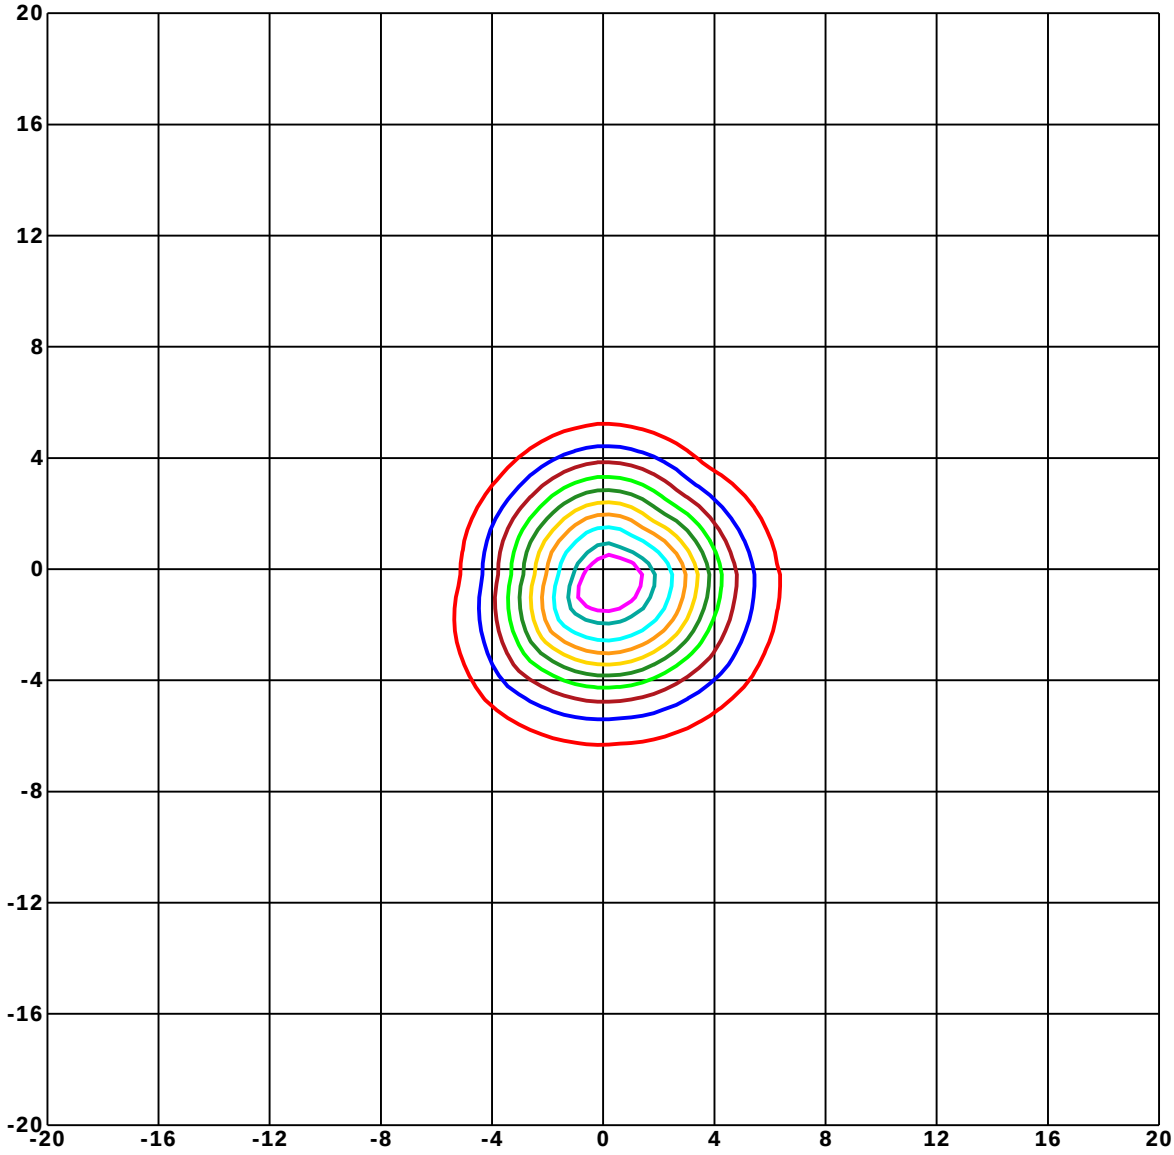

Unit of illumination:lx **Height of plane:10.0(m)/32.81(ft)**

- 12.909(1%Emax)
- 12.229(1%Emax)
- 10.87(1%Emax)
- 9.512(1%Emax)
- 8.153(1%Emax)
- 6.794(0%Emax)
- 5.435(0%Emax)
- 4.076(0%Emax)
- 2.718(0%Emax)
- 1.359(0%Emax)


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.:

Test Time: 2021/10/18 10:18:37

UTILIZATION FACTOR DIAGRAM (ROAD)

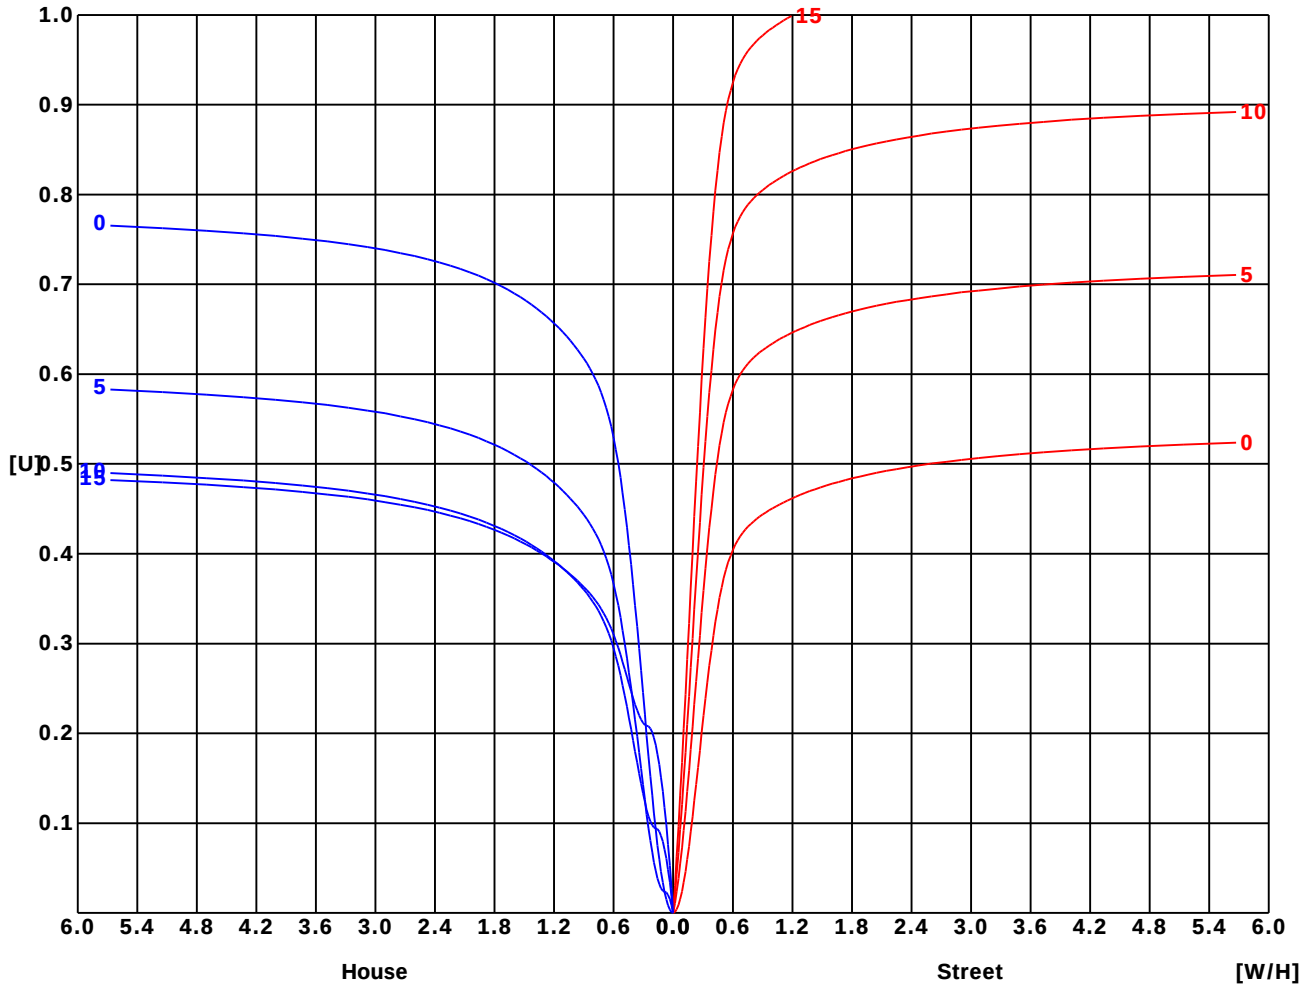


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	1313	1262	1320	1364	1540	1875	2496	3849	7679
C90	1238	1287	1239	1339	1554	1915	2526	3832	7613
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

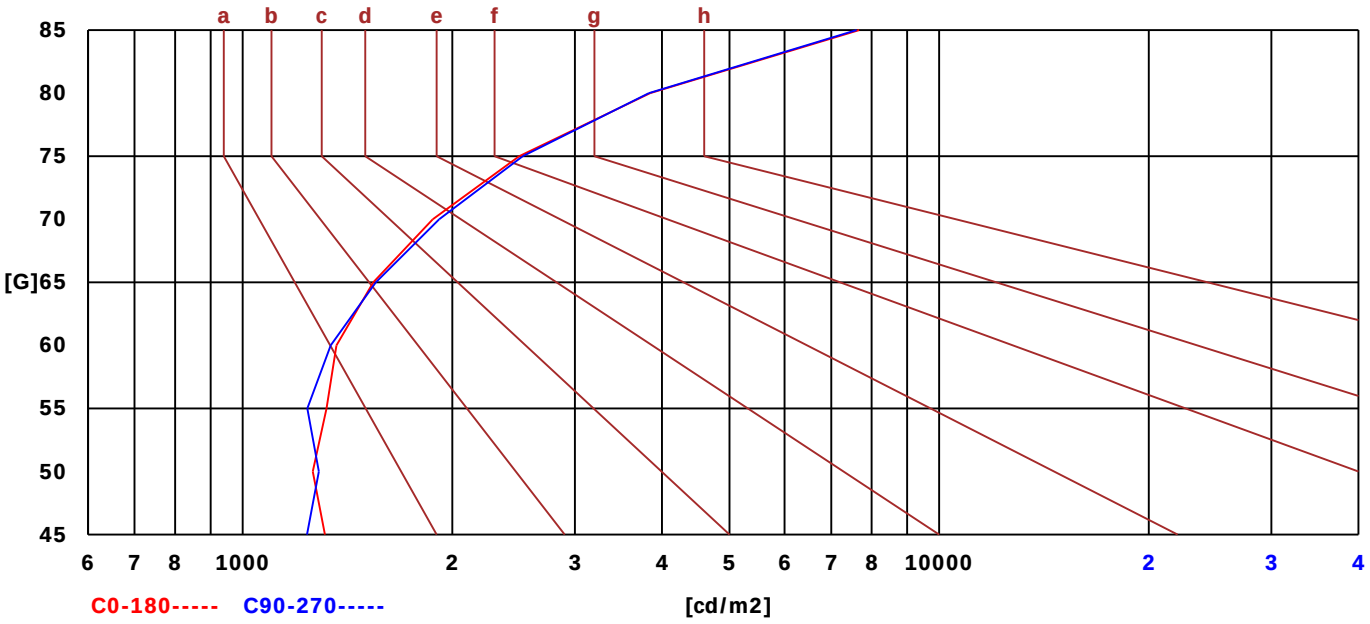


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

LX-DISTANCE DIAGRAM

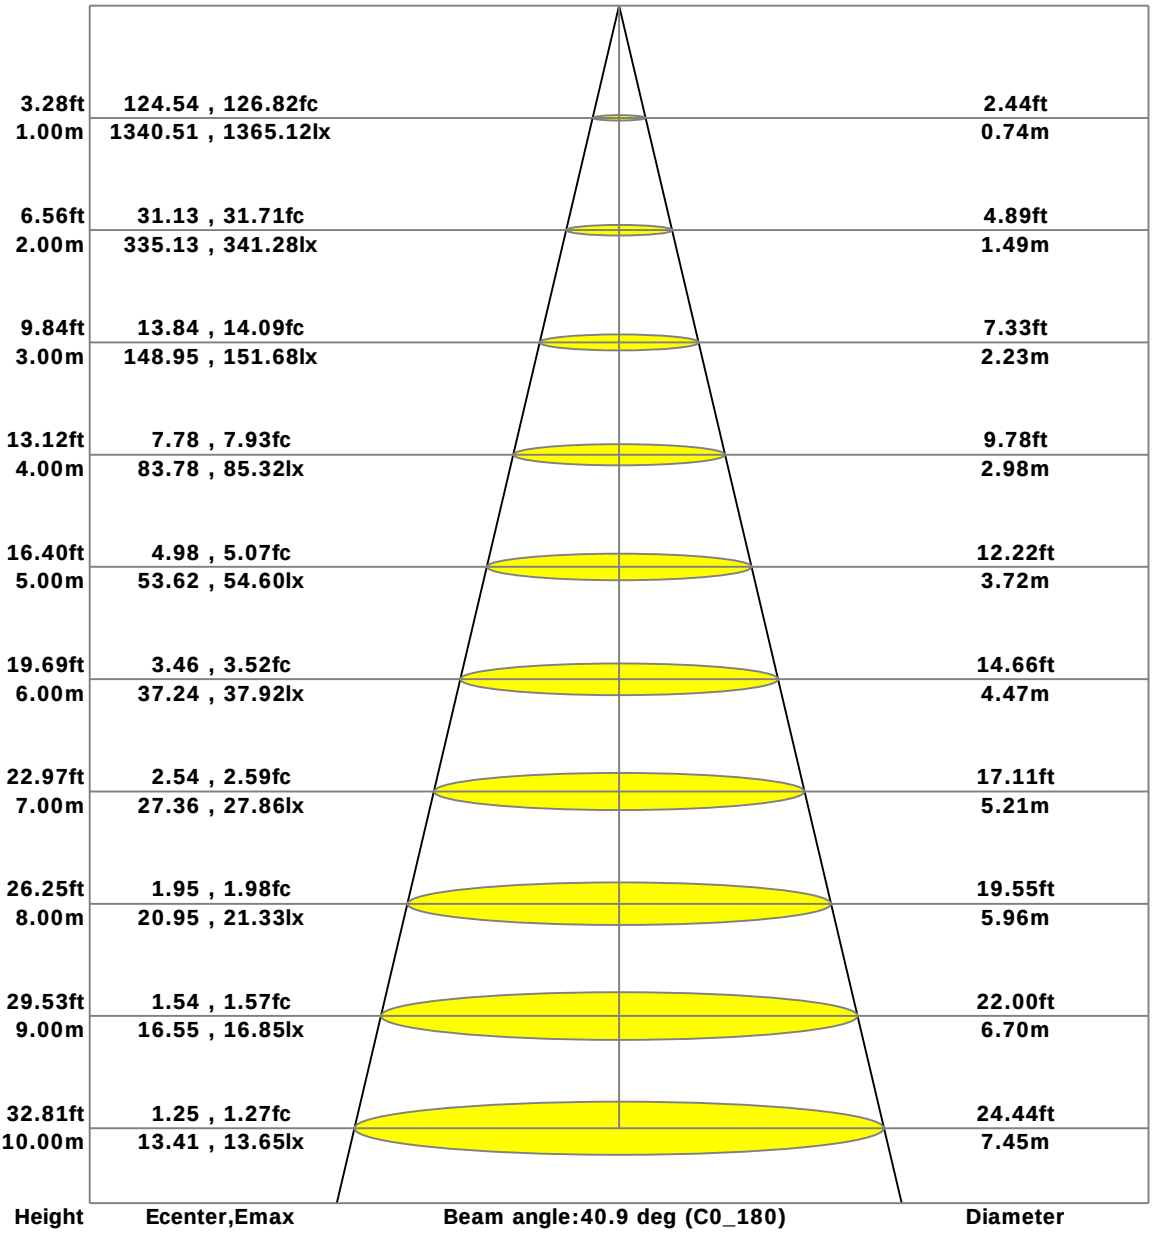

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

UGR(Unified Glare Rating) TABLE

RHOCC		70	70	50	50	30	70	70	50	50	30
RHOW		50	30	50	30	30	50	30	50	30	30
RHOF		20	20	20	20	20	20	20	20	20	20
Room Size X	Y	Viewed Endwise					Viewed Crosswise				
2H	2H	9.10	9.16	9.30	9.35	9.59	8.59	8.65	8.79	8.84	9.08
	3H	9.40	9.46	9.61	9.66	9.90	8.94	9.00	9.15	9.19	9.44
	4H	9.53	9.59	9.74	9.78	10.03	9.07	9.13	9.29	9.33	9.58
	6H	9.60	9.66	9.81	9.86	10.11	9.15	9.21	9.37	9.41	9.66
	8H	9.59	9.65	9.81	9.85	10.10	9.14	9.20	9.36	9.40	9.66
	12H	9.58	9.64	9.80	9.84	10.10	9.13	9.19	9.35	9.39	9.65
4H	2H	13.27	13.33	13.48	13.52	13.77	13.26	13.32	13.47	13.51	13.76
	3H	13.92	13.98	14.15	14.19	14.44	13.92	13.98	14.15	14.19	14.44
	4H	14.21	14.27	14.44	14.48	14.74	14.21	14.26	14.44	14.48	14.74
	6H	14.45	14.50	14.69	14.72	14.99	14.44	14.49	14.67	14.71	14.98
	8H	14.53	14.59	14.78	14.82	15.08	14.52	14.57	14.76	14.80	15.06
	12H	14.58	14.63	14.83	14.86	15.13	14.56	14.61	14.80	14.84	15.11
8H	4H	16.12	16.18	16.34	16.38	16.64	16.35	16.41	16.57	16.61	16.86
	6H	18.09	18.14	18.34	18.38	18.65	18.28	18.33	18.54	18.57	18.85
	8H	18.33	18.38	18.59	18.62	18.90	18.50	18.55	18.77	18.80	19.08
	12H	18.52	18.57	18.79	18.82	19.10	18.69	18.73	18.96	18.99	19.27
12H	4H	19.01	19.06	19.26	19.29	19.56	19.19	19.24	19.44	19.47	19.74
	6H	19.70	19.74	19.96	19.99	20.27	19.84	19.89	20.11	20.14	20.41

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

ZONAL LUMINOUS FLUX TABLE


Gamma [deg]	Imean [cd]	Zonal Flux [lm]	Sum Flux [lm]	Zonal Flux [%]	Sum Flux [%]
0	1340.04	0.00	0.00	0.00	0.00
5	1317.02	31.61	31.61	3.93	3.93
10	1215.55	89.03	120.65	11.06	14.98
15	1029.71	128.63	249.28	15.97	30.95
20	773.88	139.84	389.12	17.36	48.32
25	490.17	119.57	508.68	14.85	63.16
30	264.17	81.97	590.66	10.18	73.34
35	123.56	46.79	637.44	5.81	79.15
40	62.76	25.63	663.08	3.18	82.34
45	42.82	17.45	680.53	2.17	84.50
50	34.48	14.84	695.37	1.84	86.35
55	31.37	13.99	709.35	1.74	88.08
60	28.53	13.57	722.92	1.69	89.77
65	27.08	13.39	736.31	1.66	91.43
70	26.41	13.46	749.77	1.67	93.10
75	26.00	13.59	763.35	1.69	94.79
80	26.21	13.94	777.29	1.73	96.52
85	25.74	14.08	791.38	1.75	98.27
90	25.90	13.96	805.34	1.73	100.00

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

SPACE ISOLX DIAGRAM

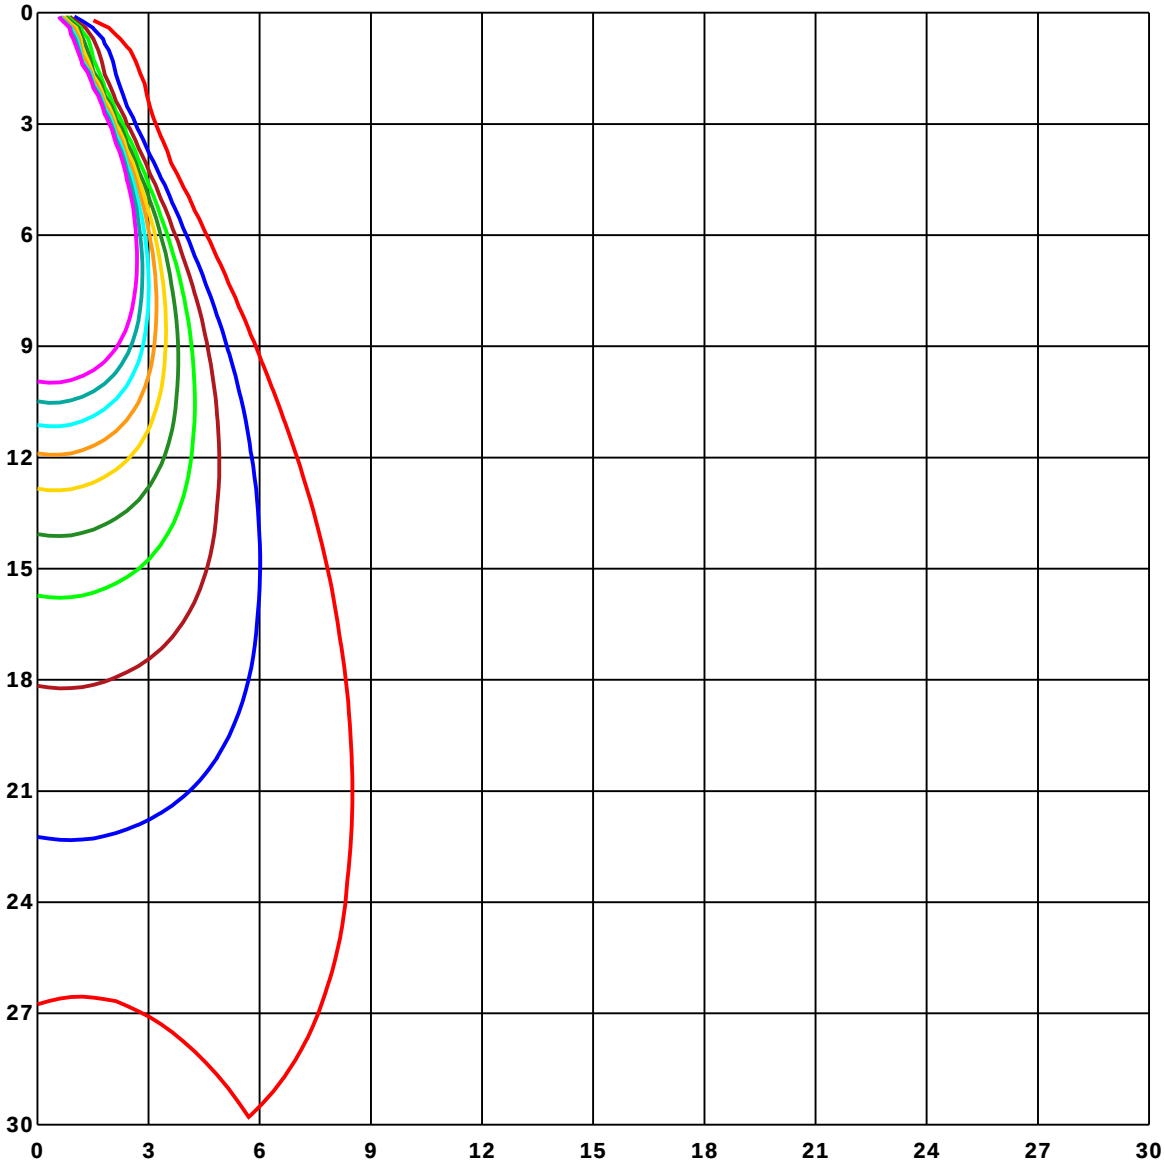

Unit of illumination:lx

13.557	6.778
12.201	5.423
10.845	4.067
9.49	2.711
8.134	1.356

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

LUMINOUS DISTRIBUTION INTENSITY DATA

Gamma\C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	1340.51	1348.25	1340.48	1330.92	1340.51	1348.25	1340.48	1330.92	1340.51	
G1	1348.33	1336.14	1331.19	1315.95	1331.15	1356.76	1351.93	1343.88	1348.33	
G2	1353.78	1323.07	1314.28	1297.73	1317.22	1361.29	1359.74	1353.82	1353.78	
G3	1355.02	1307.01	1291.57	1276.76	1302.02	1363.19	1364.19	1360.05	1355.02	
G4	1355.33	1287.63	1269.48	1251.84	1283.53	1360.56	1365.12	1362.68	1355.33	
G5	1349.34	1263.83	1246.89	1223.56	1261.16	1357.23	1363.3	1361.37	1349.34	
G6	1342.6	1237.29	1214.89	1191.84	1234.2	1351.12	1358.04	1357.89	1342.6	
G7	1332.62	1206.11	1182.16	1155.47	1203.02	1343.07	1351.89	1351.31	1332.62	
G8	1320.28	1171.25	1144.91	1112.37	1167.96	1332.31	1342.45	1342.76	1320.28	
G9	1305.7	1132.91	1103.7	1070.93	1131.09	1318.69	1329.41	1331.96	1305.7	
G10	1288.29	1089.31	1059.64	1023.46	1083.74	1302.79	1316.45	1318.35	1288.29	
G11	1266.74	1043.58	1011.74	973.75	1035.5	1278.96	1297.84	1305.46	1266.74	
G12	1241.74	993.13	962.64	921.71	989.07	1252.31	1270.26	1281.75	1241.74	
G13	1211.18	940.82	911.5	868.17	931.69	1219.88	1245.57	1257.26	1211.18	
G14	1176.86	886.93	858.57	816.44	876.95	1182.36	1212.65	1226.93	1176.86	
G15	1137.67	830.64	807.62	758.83	825.15	1139.8	1173.88	1191.87	1137.67	
G16	1092.64	777.68	751.64	710.94	764.83	1093.1	1129.12	1151.17	1092.64	
G17	1043.43	724.4	704.9	659.71	711.56	1041.72	1079.1	1104.9	1043.43	
G18	991.04	670.24	655.23	607.76	655.3	984.74	1024.82	1053.99	991.04	
G19	932.39	618.28	601.37	555.84	596.23	926.12	963.81	997.04	932.39	
G20	868.94	565.04	551.19	502.41	539.74	865.27	899.66	936.68	868.94	
G21	813.0	512.54	504.15	449.6	484.42	804.02	832.5	875.17	813.0	
G22	752.99	463.14	451.69	392.61	429.63	743.44	770.98	811.8	752.99	
G23	692.87	406.81	399.19	344.37	376.36	684.36	705.25	751.99	692.87	
G24	633.87	353.42	346.49	294.03	325.76	630.54	643.23	694.03	633.87	
G25	577.39	303.2	296.35	247.61	278.94	576.26	582.76	639.94	577.39	
G26	518.15	257.2	250.43	205.4	235.61	521.67	524.38	592.32	518.15	
G27	467.97	216.27	211.16	171.23	198.97	473.7	469.91	543.69	467.97	
G28	415.2	181.76	178.97	144.85	168.06	427.12	416.25	493.59	415.2	
G29	364.56	152.39	151.7	121.56	142.61	376.17	365.68	438.73	364.56	
G30	315.31	129.18	126.74	103.72	121.6	327.27	320.61	390.79	315.31	
G31	270.01	110.26	107.44	89.1	104.69	281.85	273.1	336.63	270.01	
G32	228.88	94.83	93.94	77.8	89.49	242.07	233.06	293.84	228.88	
G33	192.94	82.44	77.69	68.75	75.56	206.4	197.31	250.78	192.94	
G34	163.19	72.42	67.2	61.51	67.36	175.88	167.21	213.68	163.19	
G35	137.73	64.38	59.15	55.79	56.6	150.96	141.6	180.87	137.73	
G36	118.62	57.96	53.04	51.3	53.54	130.07	118.23	153.63	118.62	

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

Gamma\C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	99.7	53.0	48.48	47.74	49.02	112.82	97.49	130.5	99.7	
G38	86.2	48.94	45.34	44.99	45.77	98.04	81.36	112.58	86.2	
G39	74.48	46.54	42.87	42.75	43.29	86.47	69.21	96.49	74.48	
G40	65.11	42.05	40.89	40.78	41.2	76.56	60.97	85.97	65.11	
G41	60.01	39.0	39.35	39.35	39.38	68.87	55.29	73.74	60.01	
G42	51.34	40.82	37.91	37.8	37.91	62.6	50.33	65.96	51.34	
G43	46.7	39.38	37.06	36.72	36.52	57.61	45.88	59.81	46.7	
G44	45.77	38.38	36.52	35.67	35.63	48.9	43.99	57.72	45.77	
G45	40.66	37.14	35.13	35.01	30.45	50.1	41.63	51.15	40.66	
G46	38.46	36.25	34.66	33.97	33.66	43.06	39.93	47.97	38.46	
G47	36.72	31.07	33.93	33.0	32.96	45.03	38.38	45.54	36.72	
G48	35.44	34.47	33.43	32.23	32.11	43.1	37.14	43.45	35.44	
G49	34.24	30.25	32.77	31.49	28.36	41.24	35.98	41.47	34.24	
G50	33.16	32.46	32.38	33.08	30.72	39.69	34.94	40.0	33.16	
G51	32.27	31.92	31.96	30.25	28.09	38.26	34.05	38.61	32.27	
G52	33.39	30.91	31.38	29.87	29.44	33.7	32.81	37.45	33.39	
G53	30.64	30.45	30.95	29.17	29.05	32.54	30.53	37.72	30.64	
G54	30.1	29.67	30.25	30.95	28.55	34.66	31.18	35.59	30.1	
G55	29.64	30.29	29.87	28.44	28.13	33.66	30.49	34.66	29.64	
G56	28.9	28.71	29.21	28.01	27.7	32.77	29.75	34.12	28.9	
G57	28.67	30.18	28.82	27.62	27.28	32.15	29.25	33.35	28.67	
G58	29.09	27.86	28.55	27.35	27.12	31.34	30.41	32.69	29.09	
G59	27.89	27.51	28.28	27.12	26.69	30.25	28.28	32.19	27.89	
G60	27.51	27.28	27.66	26.77	26.54	30.41	27.93	31.72	27.51	
G61	27.35	29.09	28.78	26.69	25.96	29.71	27.62	31.3	27.35	
G62	25.46	26.73	27.0	26.35	25.88	29.48	27.31	30.83	25.46	
G63	26.97	26.58	26.73	26.23	25.88	28.86	27.04	30.1	26.97	
G64	26.73	26.39	26.54	26.11	25.88	28.51	26.73	29.71	26.73	
G65	26.77	26.04	26.27	26.27	25.77	29.71	26.5	29.05	26.77	
G66	26.54	25.96	26.15	26.19	25.81	27.86	28.4	28.55	26.54	
G67	26.42	25.81	26.15	25.03	25.84	27.58	26.04	27.97	26.42	
G68	25.92	25.65	26.11	26.27	25.69	27.28	25.92	27.97	25.92	
G69	25.81	27.66	26.11	25.88	25.77	27.08	25.77	27.2	25.81	
G70	25.84	25.65	26.08	26.19	27.74	26.93	25.61	28.47	25.84	
G71	25.73	25.57	26.15	26.0	25.69	26.73	25.53	26.62	25.73	
G72	23.37	25.69	26.08	24.76	25.69	26.58	25.61	28.44	23.37	
G73	23.45	25.65	26.04	26.23	25.69	28.51	25.73	26.27	23.45	

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks:

Report No.: **Test Time: 2021/10/18 10:18:37**

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

Gamma\C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G74	25.19	25.84	26.15	26.46	25.73	26.58	25.88	26.19	25.19	
G75	24.64	25.84	26.04	26.15	25.61	26.5	26.0	26.08	24.64	
G76	24.99	26.08	26.31	23.06	25.61	26.31	26.31	26.04	24.99	
G77	24.95	26.27	26.35	26.35	27.62	26.27	26.27	26.08	24.95	
G78	24.72	26.58	26.58	26.5	25.61	26.31	26.69	26.04	24.72	
G79	26.42	23.45	26.5	26.5	25.57	28.55	26.58	26.08	26.42	
G80	24.53	26.73	26.93	26.62	25.69	26.39	26.69	26.0	24.53	
G81	24.57	26.85	26.62	26.62	25.61	26.35	22.52	26.08	24.57	
G82	24.57	22.83	26.89	26.5	25.57	26.35	26.62	27.97	24.57	
G83	24.49	26.85	27.12	26.66	25.46	26.19	26.66	26.04	24.49	
G84	24.45	26.81	27.08	23.06	25.65	26.23	26.31	26.35	24.45	
G85	26.58	26.77	23.64	26.54	25.73	26.23	26.31	26.23	26.58	
G86	24.57	26.73	27.28	22.83	25.61	26.23	26.27	26.23	24.57	
G87	26.5	27.0	27.16	22.67	25.69	26.23	26.69	26.31	26.5	
G88	24.61	25.69	25.88	25.61	25.61	23.02	25.53	26.0	24.61	
G89	25.69	25.65	25.92	25.53	25.77	27.16	25.5	25.96	25.69	
G90	22.67	26.07	0.0	24.09	24.56	27.16	24.07	25.96	22.67	

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 6.22
Operators:
Test Date: 2021/10/18 10:18:37

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-1800B Goniophotometer
Humidity: 1
Test Distance: 6.22 m
Remarks: