
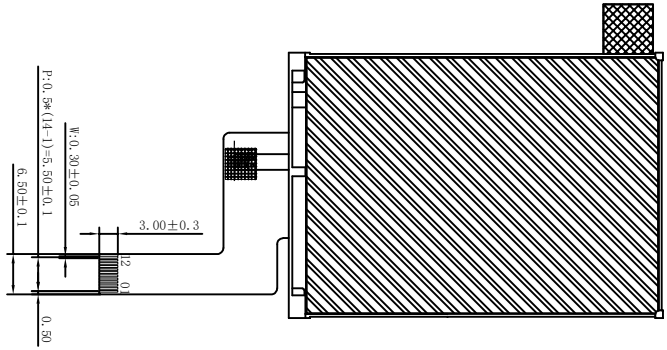


Customer Approve By


REV	DESCRIPTION	MODIFY BY	DATE
A0	1'ST DESIGN	LZZ	2022-06-24

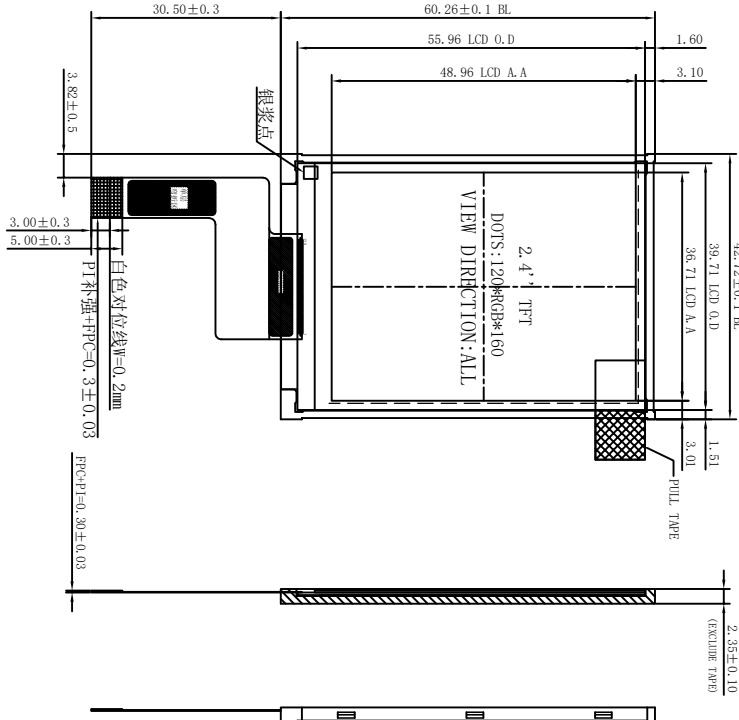

PIN	DESCRIPTION
1	GND
2	CS
3	RESET
4	RS
5	SDA
6	SCL
7	VBDD(4.8V,3V)
8	VBDD(3.3V)
9	VSS
10	GND
11	LEDA
12	LEBK

Note: **RoHS**


- 1. Display Modle: 2.4" TFT/LPS
- 2. Driving Condition: VCC=2.8~3.3V
- 3. Viewing Direction: ALL
- 4. Operating Temp: -20~+70° C
- 5. LCD: -30~+80° C
- 6. IC: /
- 7. Backlight: ST7735SV-G6
- 8. Unspecified tolerance is ±0.20mm
- 9. ROHS Request WHITE LED*4 LCM+RTP亮度 300-350cd/m²



FPC展开示意图
FPC展开出货



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE: 1/1	UNIT: mm	DATE	PAGE: 1/1		VER: V1.0
MODEL NO.:	GVH0240QQ94B		APPROVE	CHECK	DESIGNER
PART NO.:					