

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- PVC insulation
- PVC jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:105°C.Rated voltage:600Volts
- Passes UL VW-1&CSA FT1 vertical flamt test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- PVC绝缘
- PVC被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃额定电压：600Volts
- 可通过UL VW-1 及 CSA FT1，垂直燃烧测试

Applications:


- For internal wiring of computer, audio&video equipment.

应用:

- 用于电脑及视听设备内部连线。

Construction:

构造:

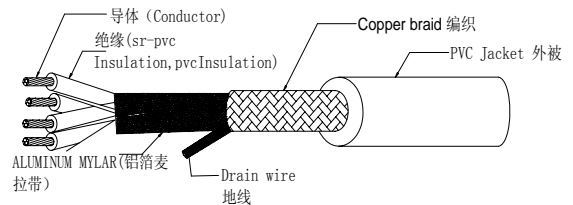

UL Style& CSA Type	Cores	Conductor		Insulation Thickness	Nom. Dia	shield COVERAGE	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm						
UL2516 CSA (Stranded)	2C	30	7/0.102	0.76	1.90	≥65	1.15	6.70	381.00
		28	7/0.127	0.76	2.00	≥65	1.15	6.90	239.00
		26	7/0.16	0.76	2.10	≥65	1.15	7.10	150.00
		24	11/0.16	0.76	2.20	≥65	1.15	7.30	94.20
		22	17/0.16	0.76	2.40	≥65	1.15	7.70	59.40
		20	21/0.178	0.76	2.50	≥65	1.15	7.90	36.70
		18	34/0.178	0.76	2.80	≥65	1.15	8.50	23.20
UL2516 CSA (Stranded)	3C	30	7/0.102	0.76	1.90	≥65	1.15	7.00	381.00
		28	7/0.127	0.76	2.00	≥65	1.15	7.20	239.00
		26	7/0.16	0.76	2.10	≥65	1.15	7.40	150.00
		24	11/0.16	0.76	2.20	≥65	1.15	7.60	94.20
		22	17/0.16	0.76	2.40	≥65	1.15	8.10	59.40
		20	21/0.178	0.76	2.50	≥65	1.15	8.40	36.70
		18	34/0.178	0.76	2.80	≥65	1.15	9.00	23.20
UL2516 CSA (Stranded)	4C	30	7/0.102	0.76	1.90	≥65	1.15	7.50	381.00
		28	7/0.127	0.76	2.00	≥65	1.15	7.70	239.00
		26	7/0.16	0.76	2.10	≥65	1.15	8.00	150.00
		24	11/0.16	0.76	2.20	≥65	1.15	8.20	94.20
		22	17/0.16	0.76	2.40	≥65	1.15	8.70	59.40
		20	21/0.178	0.76	2.50	≥65	1.15	9.00	36.70
UL2516 CSA (Stranded)	5C	30	7/0.102	0.76	1.90	≥65	1.15	8.00	381.00
		28	7/0.127	0.76	2.00	≥65	1.15	8.30	239.00
		26	7/0.16	0.76	2.10	≥65	1.15	8.60	150.00
		24	11/0.16	0.76	2.20	≥65	1.15	8.80	94.20
		22	17/0.16	0.76	2.40	≥65	1.15	9.40	59.40
UL2516 CSA (Stranded)	6C	30	7/0.102	0.76	1.90	≥65	1.15	8.60	381.00
		28	7/0.127	0.76	2.00	≥65	1.15	8.90	239.00
		26	7/0.16	0.76	2.10	≥65	1.15	9.20	150.00
		24	11/0.16	0.76	2.20	≥65	1.15	9.50	94.20