




Rev.	Description	Date
A0	New release	2023.02.10

1. PHYSICAL CHARACTERISTICS (mm)

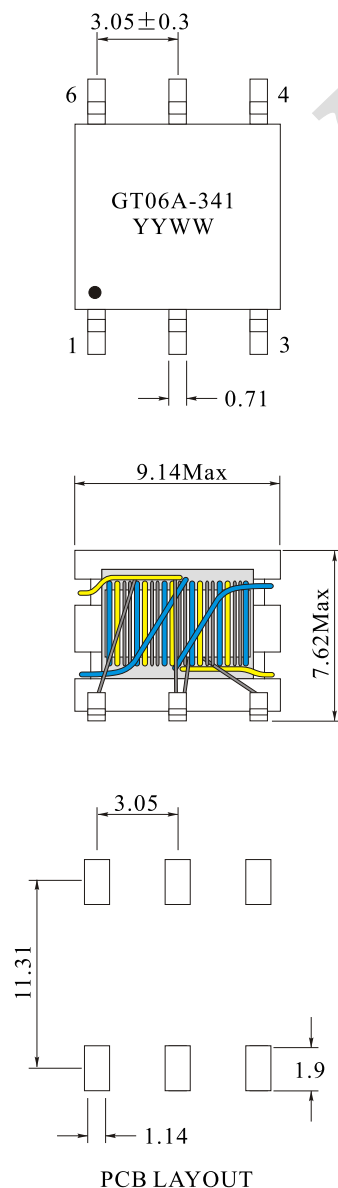

NOTES:
Temp 25°C 48%RH
RoHS Compliant

2. ELECTRICAL SCHEMATIC

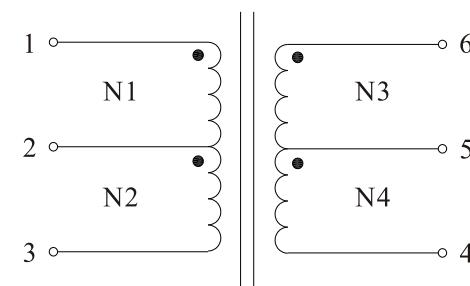

3. ELECTRICAL SPECIFICATIONS

Turns ratio: (1-3):(6-4)=1:1.3±2%

Inductance(1-3): 340uH Min@100KHz,0.1V

DCR(1-3): 0.35 Ω Max

DCR(6-4): 0.33 Ω Max

Interwinding capacitance(1-6): 10pF Typ.@100KHz,0.1V

Voltage-Time: 10Vus(N1/bipolar waveform)

Hi-Pot: 3000Vac between Pin1-6

Operating temperature: -40°C to +125°C

Sotrage temperature: -20°C to +60°C

NAME:	Drive transformer		
CUSTOMER P/N:	750313638	DATE:	2023-02-10
SHINHOM P/N:	GT06A-341	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization