

 GZTECH	Specifications	Version:	V4.3
	Pulsed Ultrafast Lasers	Date:	202503
	Model: S-30-1064-P1	Page:	1/4

1. Optical characteristics

No.	Characteristics	Parameter value	Unit
1	Central wavelength	1064	nm
2	Output power	>30	W
3	Repetition rate	single ~ 2	MHz
4	Pulse width	< 15	ps
5	Output power instability	< 3%	RMS
6	Beam quality M ²	< 1.3	/
7	Spot roundness	> 90%	/
8	Beam diameter (1/e ²)	2.0 ± 0.5	mm
9	Polarization direction	horizontal	/
10	Polarization ratio	>100:1	/
11	Divergence angle (full angle)	< 2	mrad
12	Warm-up time	< 10	min

 GZTECH	Specifications	Version:	V4.3
	Pulsed Ultrafast Lasers	Date:	202503
	Model: S-30-1064-P1	Page:	2/4

2. Electrical characteristics

No.	Characteristics	Parameter value	Unit
1	Power supply voltage	24	VDC
2	Working current	< 20	A
3	Power consumption	< 480	W
4	Recommended power supply	≥ 600	W

3. Environmental requirements


No.	Characteristics	Parameter value	Unit
1	Ambient temperature	15 - 35	°C
2	Storage temperature	-10 - 50	°C
3	Ambient relative humidity	< 90%, no condensation	/
4	Cooling capacity	> 1000	W
5	Water flow rate	> 6	L/min
6	Water tank temperature control	25 ± 0.1	°C
7	Water pipe diameter (laser)	10	mm

 GZTECH	Specifications		Version:	V4.3
	Pulsed Ultrafast Lasers		Date:	202503
	Model: S-30-1064-P1		Page:	3/4

4. Structural characteristics

No.	Characteristics	Parameter value	Unit
1	Laser dimension (without feet and galvanometer adapter)	541*314*131	mm ³
2	Carton dimension	800*500*300	mm ³
3	Net weight	28	kg
4	Gross weight	30	kg

5. Dimension

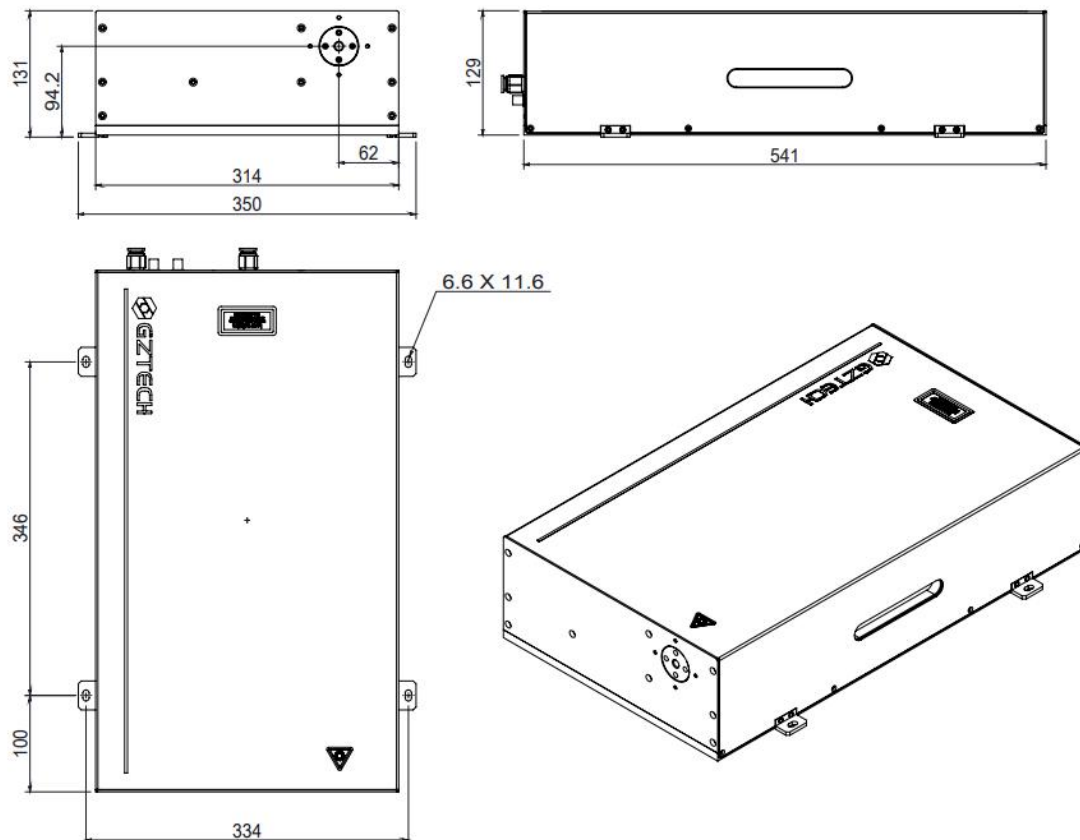

 GZTECH	Specifications	Version:	V4.3
	Pulsed Ultrafast Lasers	Date:	202503
	Model: S-30-1064-P1	Page:	4/4

6. Galvanometer connection tube

