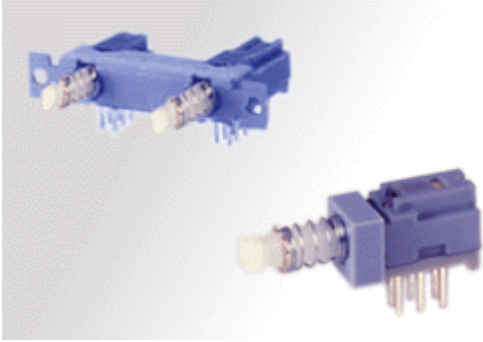

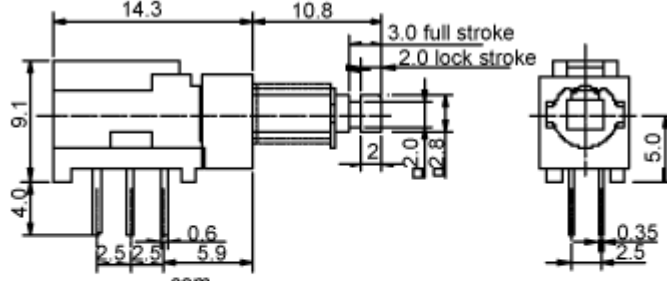



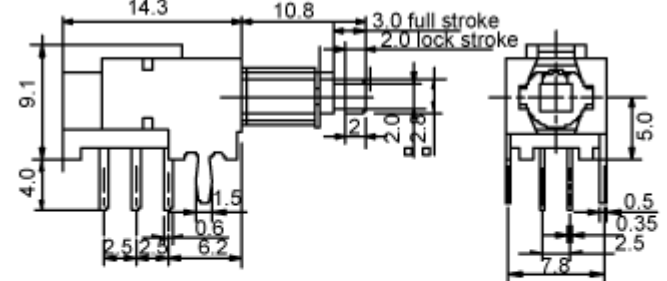





PS909L SERIES
 MINIATURE PUSHBUTTON SWITCHES UP TO DC30V 0.1A
 2P2T, 4P2T, 6P2T available



- | Rating : DC30V 0.1A
- | Insulation Resistance: $\geq 100\text{M}\Omega$ DC250V
- | Withstand Voltage: AC 250V 1 minute
- | Contact Resistance: $< 50\text{ m}\Omega$
- | Soldering Temperature: 250° C max.3sec
- | Mechanical Life: 30,000 cycles
- | Electrical Life: 10,000 cycles
- | Electrical Life: 10,000 cycles
- | Ambient Temperature Used: -10° C to +60° C
- | Ambient Humidity Used : $< 85\%$ RH
- | Operating force: 100 to 400 gf

 PS909L-22 DPDT	  
 PS909L-22-G DPDT	  
 PS909L-42 4P2T	Drawing area for PS909L-42 4P2T switch

