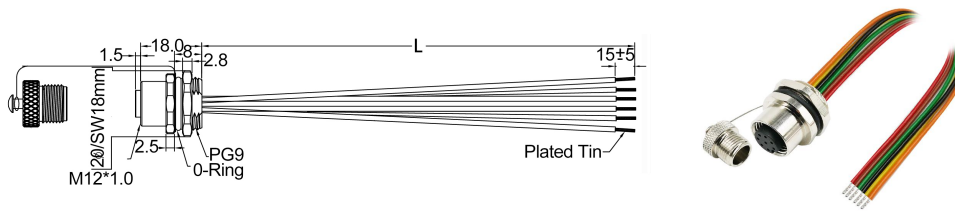



M12 8pins A code female straight rear mount connector with cap/M12,8孔,A型母头直头后锁面板连接器带帽子**Scale drawing/尺寸图****Product photo/产品图****Part number/产品料号**

Pins/针数	Code/型	Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)
8pins/8孔	A code/A型	12D585-X

Pin assignment front view/针位分布前视图

A code 8pins
8pins/8孔

**Connection diagram/连接图**

1	Bed 红色
2	Brown 棕色
3	Green 绿色
4	Black 黑色
5	Yellow 黄色
6	Orange 橙色

General data/常规数据

Pin numbers/针数	8pins/8孔
Rated voltage/额定电压	30V
Rated current(40°C)/额定电流	2A
Standards/标准	IEC 61076-2-101
Termination/焊接方式	With single wires/带线
Connector locking system/锁紧方式	Screw-locking/螺丝锁紧
Degree of protection/防护等级	IP67
Wire gauge(mm²)/线规(平方数)	0.14mm²-0.34mm²
Wire gauge(AWG)/线号(平方数)	26AWG-22AWG
Mechanical operation/插拔次数	>100 mating cycles/大于100次
Ambient temperature (operation)/操作温度	-40°C~+150°C
Contact resistance/接触电阻	≤5mΩ
Insulation resistance/绝缘电阻	>100MΩ
Connector body/胶芯	PA66+GF
Pin/端子	Phosphorus copper with gold plated/磷铜镀金
Nut and shell/螺母和铜壳	Brass with nickel plated/黄铜镀镍
Gasket/胶圈	Fluorine ring/氟胶圈
Black glue/黑色胶水	Epoxy resin/环氧树脂
Customs tariff number/海关编码	8538900000
Environmental compliance/环境符合标准	RoHs, Reach