
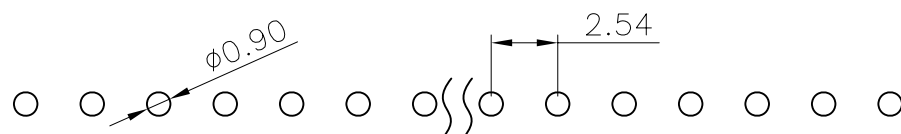

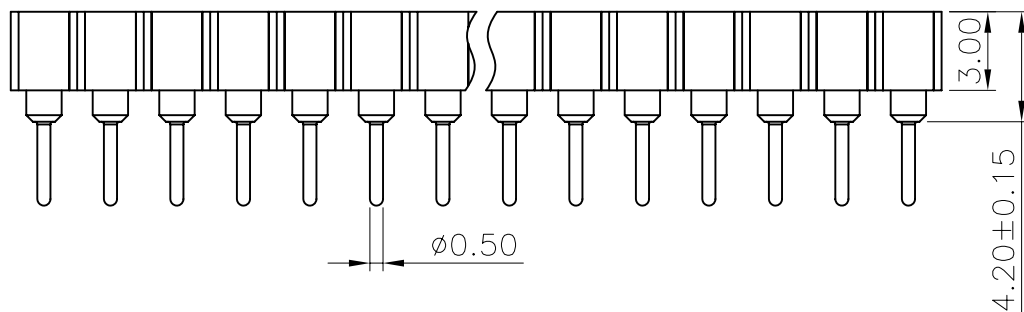


4		
零件图	成品图	客户图
		○

2			1	
REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2015-06-16

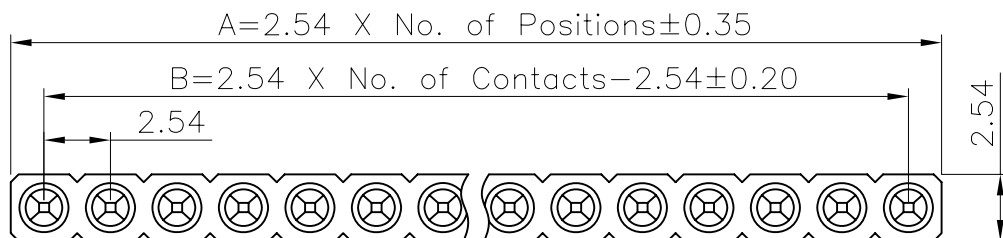

P.C.B LAYOUT

PB	D	XXX	0	7	E	X	XX	0740C	0	00
	Angel Options	No. of Positions XXX Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length (mm) 0740C, 7.40mm S Special	Insulator Option	Series
	D 180°直插 R 90°弯角 S SMT H 卧式贴片 A 单排SMT 第1Pin脚下 B 单排SMT 第1Pin上		0 No 1 1.27mm 2 1.50mm 3 2.00mm 4 2.10mm 5 2.20mm 6 2.80mm 7 3.00mm 8 3.80mm 9 4.10mm A 4.20mm B 7.00mm S Special	0 No 1 1.20mm 2 1.90mm 3 2.00mm 4 2.10mm 5 2.20mm 6 2.80mm 7 3.00mm 8 3.80mm 9 4.10mm A 4.20mm B 7.00mm S Special	A PBT单排 B PBT双排 C PET11°空 D PBT11°直 E PPS单排 F PPS双排 G PPS中空 H PPS中空 I PA46单排 J PA46双排 K PA46三排 L PA66单排 M LCP四排	0 No 1 11°200μ 焊 2 11°200μ 3 Gold40μ 全 4 Gold50μ 5 Gold1μ 6 Gold1.5μ 7 Gold2μ 8 Gold3μ 9 Gold5μ A Gold8μ B Gold10μ C Gold15μ D Gold30μ E Ag plated F Nickel 80μ	0 No 1 11°200μ 焊 2 11°200μ 3 Gold40μ 全 4 Gold50μ 5 Gold1μ 6 Gold1.5μ 7 Gold2μ 8 Gold3μ 9 Gold5μ A Gold8μ B Gold10μ C Gold15μ D Gold30μ E Ag plated F Nickel 80μ	0740C, 7.40mm S Special	0 No 00 No	00 No

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Clip(contact 4 finger): Beryllium copper,heat treated

Plating(outer sleeve):

Tin plated: 2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"nickelfull gold

Plating(contact): 2μm/80μ"nickel, gold or Tin plated

Insulator black(housing): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Operating voltage: 60VAC/DC

Mechanical:

Average insertion force with steel pin of

Ø0.43mm/0.017": <150g

Average withdrawal force with steel pin of

Ø0.43mm/0.017": >25g min.

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55°C to+125°C


Tin plated:-40°C to+105°C

Soldering temperature: +260°C, 10s max

ENKCOM®
 www.enkcom.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE ANGLE ±5° X.XXX ±0.15 X.XX ±0.25 X.X ±0.40 X. ±0.50	DATE :	2015-06-16	TITLE: 2.54mmPitch SIP Sockets Straight Single Row Pin Length 7.40mm				
	DRAWN :	Songjun					
	CHECKED :		PART NO: PBDXXX07EXXX0740C000				
	APPROVED :						
	PROJECTON		REV: A0 UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE 1/1	