


SPECIFICATIONS:

- 1、Rated Voltage: 0.3/0.66/0.72KV
- 2、Insulation Voltage: 3KV
- 3、Rated Frequency: 50HZ or 60HZ
- 4、Operating Temperature: -25℃ to 55℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE, UL

FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current
- 5.can be used on 11kv insulated cable


DIMENSIONS(mm):

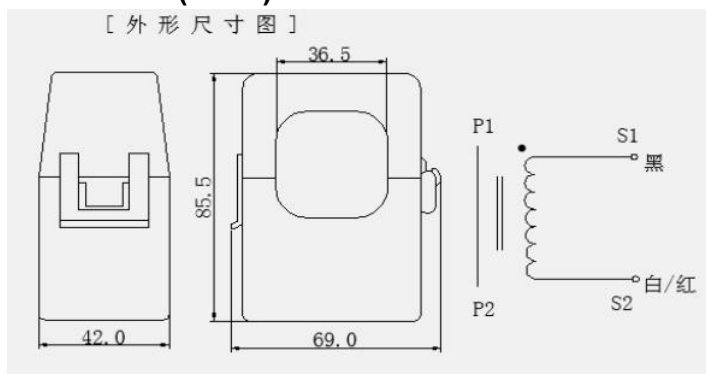


PARAMETERS:

Model	Input (A)	Max current (A)	Turns (T)	Burden (Ω)	Output
SCT-T36	0-600A	600	3000	100	1A/5A,0.333V/1V

CURVE PERFORMANCE:

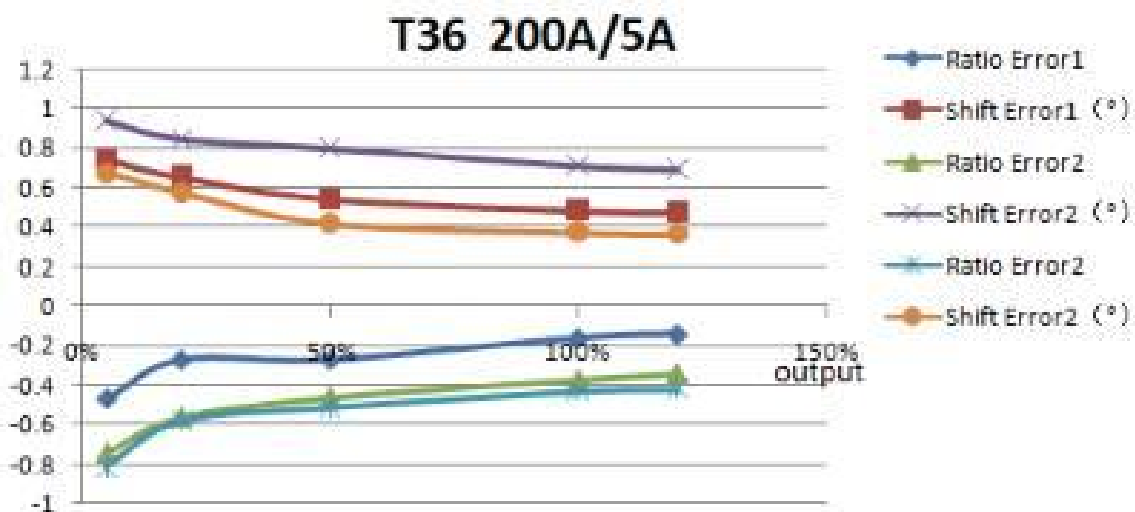

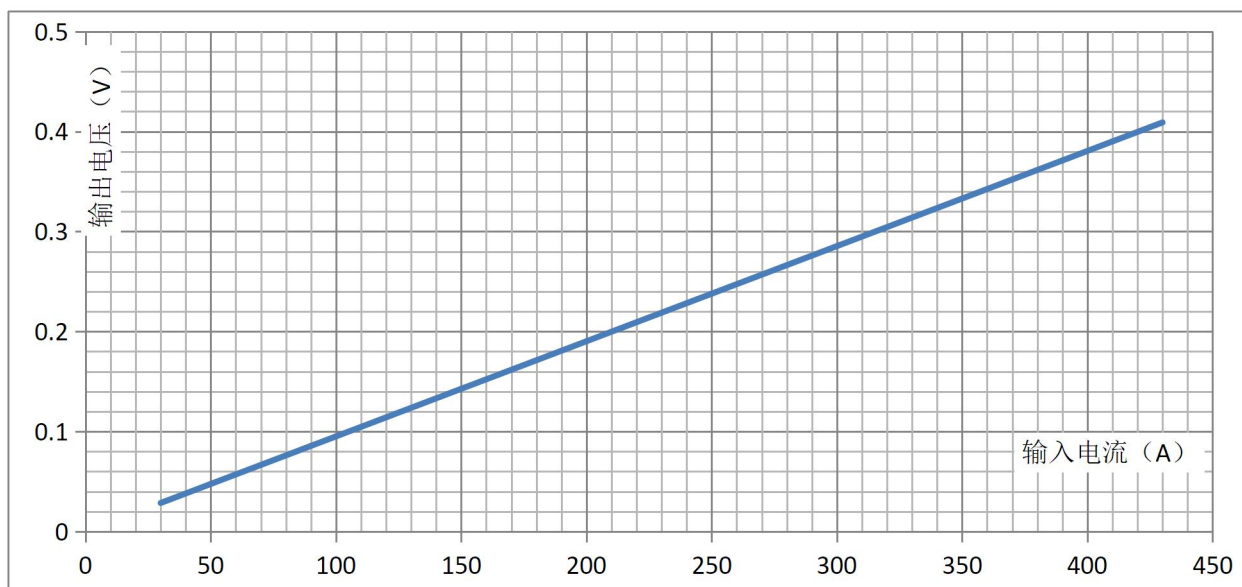

[SCT0036输出1A, 性能曲线 (1.5平方皮线留长2.5米)]

