
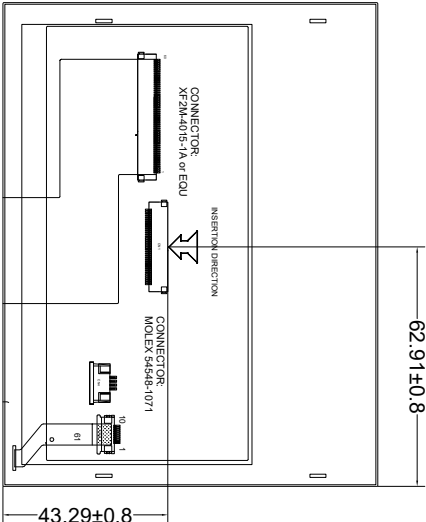



REV	DESCRIPTION	DATE
1.0	First Issue	2022.12.22

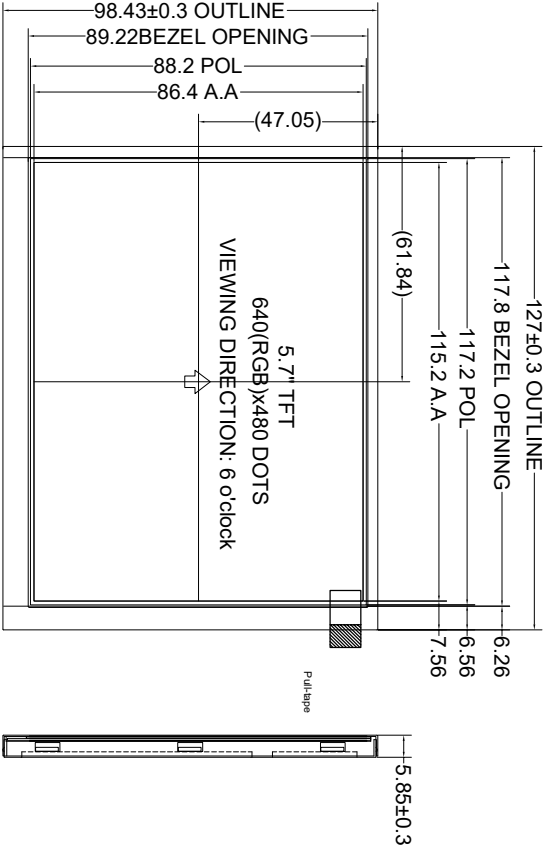

CN1:

PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	U/D	9	DE	17	B2	25	G2	33	R2		
2	NC	10	XL	18	B1	26	G1	34	R1		
3	HSYNC	11	YU	19	B0	27	G0	35	R0		
4	VLED	12	ADJ	20	VSS	28	VSS	36	XR		
5	VLED	13	B5	21	G5	29	R5	37	YD		
6	VLED	14	B4	22	G4	30	R4	38	DCLK		
7	VCC	15	B3	23	G3	31	R3	39	VSS		
8	VSNC	16	VSS	24	VSS	32	VSS	40	L/R		

1. LED Diagram:



Backlight 21pcs LED Circuit

If=140mA, Vf=9.0±0.9V

- NOTES:
1. DISPLAY TYPE: 5.7INCH TFT /Black
 2. BACKLIGHT: 21 CHIP WHITE LED, IN PARALLEL
 3. OPERATING TEMP: -20°C~+70°C
 4. STORAGE TEMP: -30°C~+80°C
 5. RESOLUTION: 640XRGBx480
 6. LCD IC: HX8250-A+HX8678-B
 7. "()"reference dimension. "*"critical dimension
 8. RoHS Compliant

INTERFACE		 Dongguan ZTL Technology Co., Ltd.			
VIEWING DIRECTION		PART NO.		SHEET OF	
Gray		File NO		REV.	
free		DWN Rich Liang		1.0	
		CHKD Rich Liang		TOLERANCE UNLESS SPECIFIED	
		PROJECTION 		UNIT mm	
				SCALE 1:1	